

WAAS CH 53624 W19A	APP CRS 188°	Rwy Idg TDZE 431 Apt Elev 436
--	------------------------	---

RNAV (GPS) RWY 19



FAYETTE COUNTY (FYE)

RNP APCH - GPS.

Baro-VNAV and VDP NA when using Memphis Intl altimeter setting. Rwy 19 helicopter visibility reduction below ¾ SM NA. When local altimeter setting not received, use Memphis Intl altimeter setting: increase LPV DA to 817 feet and all visibilities ½ SM, increase LNAV/VNAV DA to 779 feet; increase all MDA 100 feet and visibility LNAV Cat C ½ SM and Circling Cat C ½ SM.

MISSED APPROACH:
Climb to 3000 direct
NYATE and hold.

AWOS-3 119.875	MEMPHIS APP CON 125.8 338.3	CTAF 122.9
--------------------------	---------------------------------------	----------------------

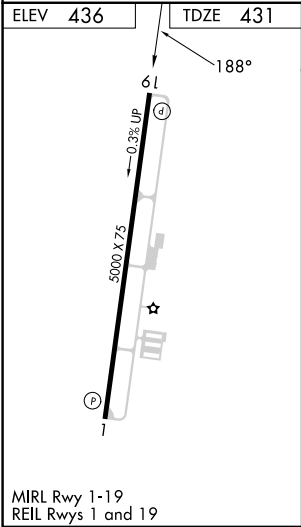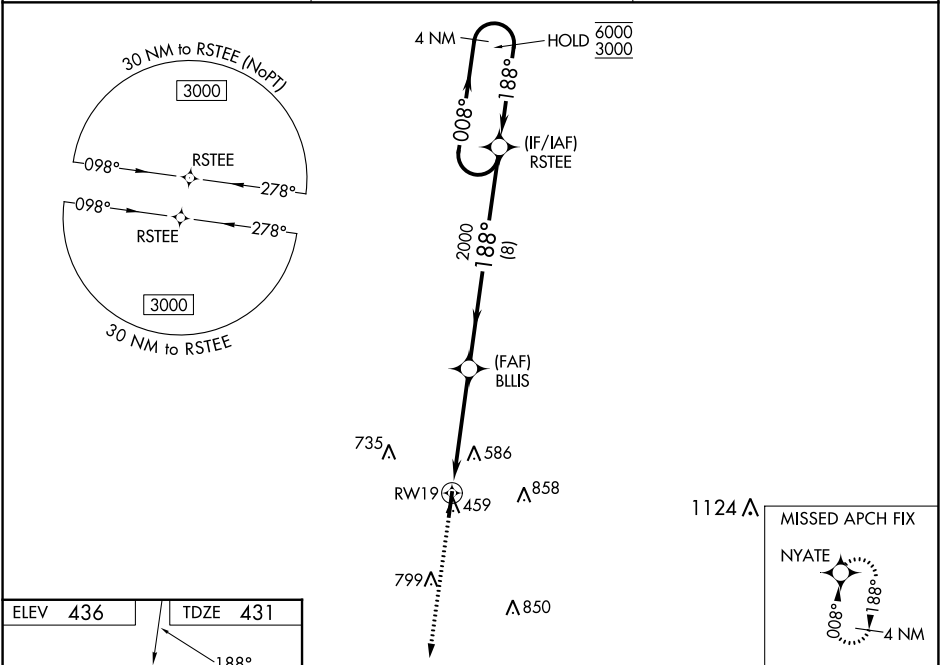

3000 ↑	NYATE ✦	VGSI and RNAV glidepath not coincident (VGSI Angle 3.07/TCH 31).		4 NM Holding Pattern	
BLIS 2000 1.3 NM to RWY19 1.3 NM 3.2 NM 8 NM 188° 008° 6000 3000 GP 3.20° TCH 55					
CATEGORY		A	B	C	D
LPV DA		721-1	290 (300-1)		NA
LNAV/ VNAV DA		683-1	252 (300-1)		NA
LNAV MDA		880-1	449 (500-1)	880-1 ³ / ₈ 449 (500-1 ³ / ₈)	NA
CIRCLING		900-1 464 (500-1)	920-1 484 (500-1)	1160-2 724 (800-2)	NA

SE-1, 02 NOV 2023 to 30 NOV 2023

SE-1, 02 NOV 2023 to 30 NOV 2023