

CONTINUED FROM PRECEDING PAGE

AIRSPACE: CLASS D svc 1200Z† Mon to 0400Z† Fri, 1200–0400Z† Sat, 1300–0500Z† Sun; other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE CLF.

CHARDON (H) VOR/DME 112.7 CXR Chan 74 N41°31.02' W81°09.79' 275° 23.4 NM to fld. 1317/5W.

VOR unusable:

074°–084° byd 10 NM blo 3,300'

085°–099° byd 10 NM blo 11,000'

104°–180° byd 10 NM blo 6,000'

357°–073° byd 10 NM blo 11,000'

DME unusable:

019°–029° byd 34 NM blo 3,700'

158°–174° blo 5,500'

253°–274° blo 4,100'

ILS/DME 109.75 I-BFT Chan 34(Y) Rwy 24R. Class IE. DME unusable byd 30° right of course.

COMM/NAV/WEATHER REMARKS: Emerg frequency 121.5 not available at twr.

CLEVELAND–HOPKINS INTL (CLE)(KCLE) 9 SW UTC–5(–4DT) N41°24.56' W81°51.28'

DETROIT

800 B AOE Class I, ARFF Index C NOTAM FILE CLF

H–10G, L–30G

RWY 06R–24L: H9953X150 (CONC–GRVD) S–100, D–185, 2S–175,

IAP, AD

2D–340 PCN 63 R/B/W/T HIRL CL

RWY 06R: MALSR. TDZL. PAPI(P4L)—GA 3.0° TCH 73'. RVR–TMR
Thld dspcd 1923'. Trees.

RWY 24L: MALSR. TDZL. PAPI(P4R)—GA 3.0° TCH 48'. RVR–TMR

RWY 06L–24R: H9000X150 (CONC–GRVD) S–75, D–200, 2S–175,
2D–400 PCN 78 R/B/W/T HIRL CL

RWY 06L: ALSF2. TDZL. PAPI(P4L)—GA 3.0° TCH 69'. RVR–TMR
Trees.

RWY 24R: ALSF2. TDZL. PAPI(P4R)—GA 3.0° TCH 65'. RVR–TMR

RWY 10–28: H6018X150 (ASPH–CONC–GRVD) S–155, D–200,
2S–175, 2D–400 PCN 80 R/B/W/T HIRL 0.5% up E

RWY 10: REIL. PAPI(P4L)—GA 3.0° TCH 45'. RVR–R Tree.

RWY 28: MALSF. PAPI(P4R)—GA 3.0° TCH 45'. RVR–T Pole.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 06L:TORA–9000 TODA–9000 ASDA–9000 LDA–9000

RWY 06R:TORA–9956 TODA–9956 ASDA–9956 LDA–8029

RWY 10:TORA–6018 TODA–6018 ASDA–6018 LDA–6018

RWY 24L:TORA–9956 TODA–9956 ASDA–9956 LDA–9956

RWY 24R:TORA–9000 TODA–9000 ASDA–9000 LDA–9000

RWY 28:TORA–6018 TODA–6018 ASDA–6018 LDA–6018

ARRESTING GEAR/SYSTEM

RWY 10: EMAS

RWY 28: EMAS

SERVICE: S4 FUEL 100LL, JET A1+ 0X1, 2, 3, 4 LGT PAPI unusbl byd 8° L&R of cntrln.

NOISE: All apchs are ovr noise sensitive areas. Arpt late ngt noise abatement procedures are in effect 0400–1100Z†.

Additional noise abatement procedures are in effect call amgr normal business hrs at 216–265–6090.

AIRPORT REMARKS: Attended continuously. Deer, coyotes, & birds inclg waterfowl on & invof arpt. ASSC in use. Operate transponders with altitude reporting mode and ADS–B (if equipped) enabled on all airport surfaces. Twys clsd Oct–Apr to support deicing ops: Twy M; Twy J2; Twy M1 btn Twy L & Twy J1; Twy M2 btn Twy L & Twy J1. Txl H clsd to acft with wingspan ovr 171 ft. Pad 2 and Taxilane Y1 rstd to Group II acft, less than 79' wingspan. Ramp area concourse D between gates D1, D28 clsd except acft wingspan less than 86'. Pad 3 bays 1–5 clsd to acft with wingspan over 134'. Pad 3 bay 6 clsd to acft with wingspan over 94'. Twy F clsd to acft with wingspan over 118'. NASA Glenn Research Center; NASA ramp PPR call 216–433–2031; Mon–Fri 1300–2230Z†. Contact NASA ops on freq 122.925 within 50 NM. Ldg Fee. ADCUS avbl dly 1200–0000Z†, ltd avblty durg off hrs; all rqrqs for svc must be made with US Cust Svc ofc lctd at gate A–14 call 216–267–3600 durg listed hrs.

AIRPORT MANAGER: 216–265–6963

WEATHER DATA SOURCES: ASOS (216) 416–2729 TDWR.

COMMUNICATIONS: D–ATIS ARR 127.85 D–ATIS DEP 132.375 UNICOM 122.95

RCO 122.3 (CLEVELAND RADIO)

® APP CON 126.55

® DEP CON 128.25 135.875


TOWER 124.5

GND CON 121.7 CLNC DEL 125.05

CPDLC (LOGON KUSA)

PDC

AIRSPACE: CLASS B See VFR Terminal Area Chart.

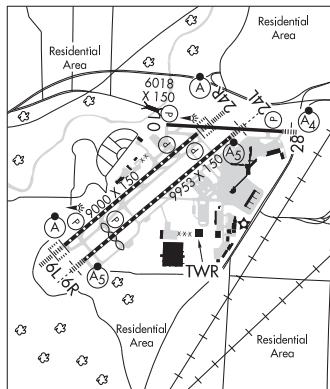

CONTINUED ON NEXT PAGE

CONTINUED FROM PRECEDING PAGE

VOR TEST FACILITY (VOT) 110.4

RADIO AIDS TO NAVIGATION: NOTAM FILE CLE.

DRYER (VH) (DH) VOR/DME 113.6 DJB Chan 83 N41°21.48' W82°09.72' 082° 14.2 NM to fld. 780/5W.

VOR unusable:

001°-010° byd 40 NM
 020°-024° byd 40 NM
 034°-040° byd 40 NM
 080°-095° byd 40 NM
 110°-120° byd 40 NM
 135°-145° byd 40 NM
 135°-150°
 155°-165°
 160°-165° byd 40 NM
 185°-195° byd 40 NM
 187°-197°
 210°-224° byd 40 NM
 211°-218°
 225°-235° byd 40 NM blo 11,000'
 225°-235° byd 95 NM
 225°-245° byd 20 NM blo 3,500'
 245°-265° byd 40 NM
 275°-285° byd 40 NM blo 18,000'
 286°-355° byd 40 NM

DME unusable:

187°-197°
 289°-310°
 322°-332°
 350°-060°

ILS/DME 111.55 I-LIZ Chan 52(Y) Rwy 06L. Class IIIE.

ILS/DME 111.9 I-CLE Chan 56 Rwy 06R. Class IIE.

ILS/DME 109.9 I-HPI Chan 36 Rwy 24L. Class IIE. LOC unusable byd 20° left of course.

ILS/DME 111.55 I-PVY Chan 52(Y) Rwy 24R. Class IIIE.

ILS/DME 110.7 I-PXP Chan 44 Rwy 28. Class IE.

COMM/NAV/WEATHER REMARKS: Freq 121.5 not avbl at FSS.

CUYAHOGA CO (CGF)(KCGF) 10 E UTC-5(-4DT) N41°33.88' W81°29.23'

876 B NOTAM FILE CGF

RWY 06-24: H5502X100 (ASPH-GRVD) S-90, D-123, 2D-213

PCN 35 F/C/X/U HIRL

RWY 06: REIL. PAPI(P4L)—GA 3.0° TCH 45'. Thld displcd 318'. Tree.

RWY 24: MALSR. PAPI(P4L)—GA 3.0° TCH 45'. Thld displcd 500'.

Road.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 06: TORA-5502 TODA-5502 ASDA-5502 LDA-5184

RWY 24: TORA-5502 TODA-5502 ASDA-5502 LDA-5000

ARRESTING GEAR/SYSTEM

RWY 06: EMAS

RWY 24: EMAS

SERVICE: S4 FUEL 100LL, JET A, A+ 0X3 LGT When ATCT clsd
 actvt MALSR Rwy 24; REIL Rwy 06; PAPI Rwy 06, HIRL Rwy 06-24;
 windsocks—CTAF. PAPI Rwy 24 opr consly.

NOISE: Noise abatement procs in effect call arpt.

AIRPORT REMARKS: Attended 1100-0400Z†. For aft hrs svc call

216-261-8800 drg atnidd hrs. Birds & wildlife on & invof arpt. Flt trg
 prohibited 0400-1200Z†. ATCT vis SW ltd wi 500 ft AER Rwy 06.

AIRPORT MANAGER: 216-289-4111

WEATHER DATA SOURCES: AWOS-3PT (216) 289-4113

COMMUNICATIONS: CTAF 118.5 D-ATIS 119.95 (216)-289-4113

④ CLEVELAND APP/DEP CON 125.35

COUNTY TOWER 118.5 (1200-0400Z†) GND CON 121.85 CLNC DEL 121.85 (When twr clsd)


CLEARANCE DELIVERY PHONE: For CD when ATCT clsd ctc Cleveland Apch at 216-352-2323.

AIRSPACE: CLASS D svc 1200-0400Z†; other time CLASS G.

DETROIT

H-10G, L-30G

IAP, AD

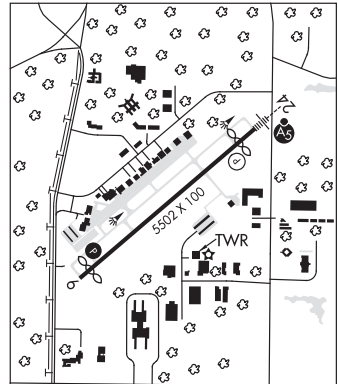

CONTINUED ON NEXT PAGE