

NEWARK LIBERTY INTL (EWR)(KEWR) 3 S UTC-5(-4DT) N40°41.55' W74°10.12'

NEW YORK

17 B LRA Class I, ARFF Index E NOTAM FILE EWR

COPTER

RWY 04L-22R: H1000X150 (ASPH-CONC-GRVD) D-210, 2D-520, 2D/2D2-1000 PCN 96 R/B/X/T HIRL CL

H-101, 121, I-33A, 34H

RWY 04L: MALSR. TDZL. PAPI(P4L)—GA 3.1° TCH 77'. RVR-TMR Thld dspcd 2540'. Tree.

IAP, AD

RWY 22R: MALSR. TDZL. REIL. PAPI(P4L)—GA 3.1° TCH 70'. RVR-TMR Thld dspcd 1440'. Pole.

RWY 04R-22L: H1000X150 (ASPH-GRVD) D-210, 2D-520, 2D/2D2-1000 PCN 96 R/B/W/T HIRL CL


RWY 04R: ALSF2. TDZL. PAPI(P4L)—GA 2.95° TCH 71'. RVR-TMR Thld dspcd 1190'. Pole.

RWY 22L: ALSF2. TDZL. PAPI(P4L)—GA 3.0° TCH 60'. RVR-TMR Thld dspcd 1793'. Antenna.

RWY 11-29: H6726X150 (ASPH-GRVD) D-210, 2D-520, 2D/2D2-1000 PCN 96 R/B/W/T HIRL CL

RWY 11: TDZL. REIL. PAPI(P4R)—GA 3.0° TCH 60'. RVR-TMR Bldg.

RWY 29: TDZL. REIL. PAPI(P4R)—GA 3.0° TCH 60'. Thld dspcd 224'. Sign.

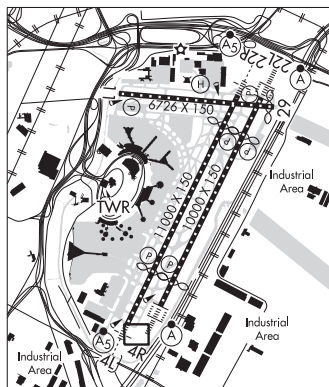

LAND AND HOLD—SHORT OPERATIONS

LDG RWY	HOLD—SHORT POINT	AVBL LDG DIST
RWY 04L	11-29	7750
RWY 04R	11-29	8100
RWY 11	04R-22L	5700

RUNWAY DECLARED DISTANCE INFORMATION

RWY 04L: TORA-11000 TODA-11000 ASDA-11000 LDA-8460
RWY 04R: TORA-10000 TODA-10000 ASDA-10000 LDA-8810
RWY 11: TORA-6726 TODA-6726 ASDA-6726 LDA-6726
RWY 22L: TORA-10000 TODA-10000 ASDA-10000 LDA-8207
RWY 22R: TORA-11000 TODA-11000 ASDA-11000 LDA-9560
RWY 29: TORA-6726 TODA-6726 ASDA-6726 LDA-6502

ARRESTING GEAR/SYSTEM

RWY 11: EMAS

RWY 29: EMAS

SERVICE: S4 FUEL 100LL, JET A OX3 LGT Rwy status lgts in opr. Rwy 29 PAPI unusbl 4° left of cntrln.

NOISE: Noise restrictions call 212-435-3784 during normal business hrs.

AIRPORT REMARKS: Special Air Traffic Rules—Part 93. Attended continuously. Flocks of birds on and in/ov airport. Para-sail and banner towing ops 1000' and blo in upper and lower New York bays including Rockaway Inlet indef. High volume of low level helicopter t/c arriving and departing Helo Kearny Heliport (65NJ) located 3.5 miles northeast of the arpt. Expect to leave and re-enter the Class B Airspace during moderate to heavy arrival periods. Rwy 04L-22R, south 1779' conc, north 1228' conc, center 7993' asph. ASDE-X in use. Operate transponders with altitude reporting mode and ADS-B (if equipped) enabled on all airport surfaces. Rwy 04R and Rwy 04L departures use upper antenna for ATC communications. Twy Z between Twy Z2 and Twy Z4 clsd to acft with wingspans in excess of 171'. ADG IV acft restriction from passing Twy Z3 on Twy Z. Twy Z east of Twy U acft speed restriction of 17kts/20mph max for all acft with wingspans in excess of 171'. All twys surrounding "Ballpark" parking area (Twy Y btn Twy S and Twy U, Twy S btn Twy Y and Twy K, Twy K btn Twy S and Twy B, Twy B btn Twy K and Twy U and Twy U btn Twy B and Twy Y) acft speed restriction of 17kts/20mph for all acft with wingspans in excess of 171'. Twy EE btn Rwy 04R-22L and Rwy 11-29 clsd to acft with wingspans in excess of 171'. Twy Y btn RM and Twy U, speed restriction of 17 kts (20 mph). Twy A btn Twy AA and ramp clsd to acft with wingspans in excess of 171 ft. Twy Z5 clsd to acft with wingspans in excess of 118'. Twy A11 W of Twy A acft spd rstr of 17 kts/20 mph max for all acft with wingspans in excess of 171'. Acft with wingspans in excess of 118' prohibited from turning S on Twy R from Twy B1. GA/intrnt ldg fees payable by major credit cards only. Ldg fee. Flight Notification Service (ADCUS) avbl.

AIRPORT MANAGER: 973-961-6161

WEATHER DATA SOURCES: ASOS (973) 621-2892 LLWAS. TDWR.

COMMUNICATIONS: D-ATIS ARR 115.7 D-ATIS SOUTH ARR 134.825 (973) 824-4417. UNICOM 122.95

® NEW YORK APP/DEP CON 132.8 (241°-269°) 128.55 (090°-240°) 127.6 (270°-330°) 132.7 (331°-089°)

® NEW YORK APP/DEP CON 119.2

TOWER 118.3 134.05 GND CON 121.8 126.15 CLNC DEL 118.85

PRE TAXI CLNC 118.85 RAMP CTL 132.45

CPDLC DCL (LOGON KUSA)

PDC

CONTINUED ON NEXT PAGE

