


WAAS CH 65931 W04A	APP CRS 038°	Rwy Idg TDZE 1949 Apt Elev 1957
--	------------------------	---

RNAV (GPS) RWY 4L
FELTS FLD (S'F'F')

RNP APCH - GPS.	MISSED APPROACH: Climb to 2850 then climbing right turn to 8000 direct CEVOS and on track 059° to KARPS and hold, continue climb-in-hold to 8000. * LPV missed approach requires minimum climb of 330 feet per NM to 5400.
Circling to Rwy 22L NA at night. Circling NA northwest of Rwy 4L-22R. Rwy 4L helicopter visibility reduction below 3/4 SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C.	

ATIS 120.55	SPOKANE APP CON 133.35 263.0	FELTS TOWER ★ 132.5 (CTAF) 239.025	GND CON 121.7	CLNC DEL 121.7	UNICOM 122.95
-----------------------	--	--	-------------------------	--------------------------	-------------------------

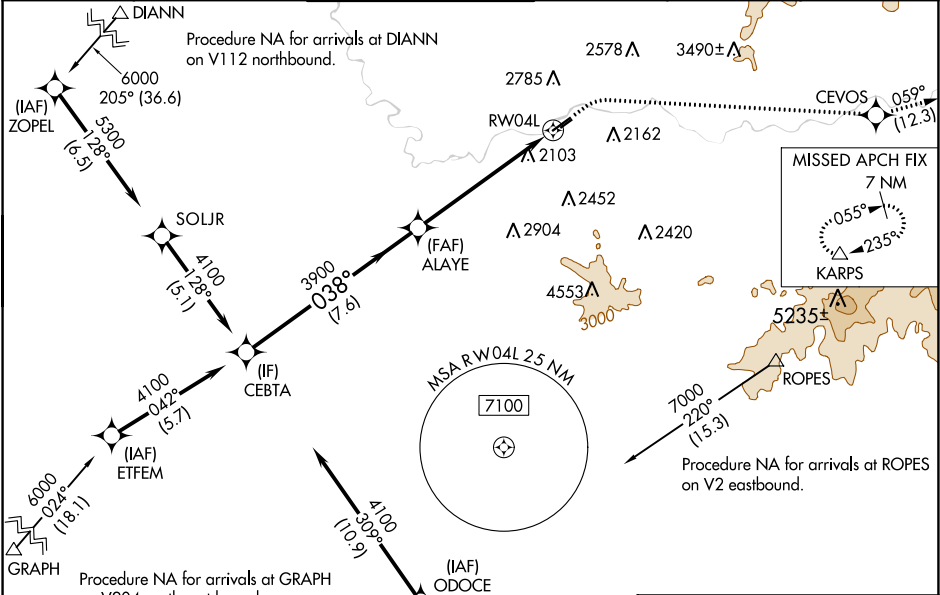

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 50). CEBTA				
2850 8000 CEVOS tr 059° KAPRS				
4100 038° 3900 2.6 NM to RW04L RW04L				
GP 3.00° TCH 56 7.6 NM 3.4 NM 2.6 NM				
CATEGORY	A	B	C	D
LPV DA*	2203-3/4		254 (300-3/4)	
LPV DA	2529-15/8		580 (600-15/8)	
LNAV/VNAV DA	2779-21/2		830 (900-21/2)	
LNAV MDA	2820-1 871 (900-1)	2820-11/4 871 (900-11/4)	2820-21/2 871 (900-21/2)	871 (900-21/2)
CIRCLING	2820-11/4	863 (900-11/4)	3100-3 1143 (1200-3)	3360-3 1403 (1500-3)

