


WAAS CH 73035 W09A	APP CRS 094°	Rwy Idg TDZE Apt Elev	5001 716 716
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 9

WILLOW RUN (YIP)

RNP APCH - GPS.		MISSED APPROACH: Climb to 1900 then climbing left turn to 4000 direct CIGAL and hold, continue climb-in-hold to 4000.	
▼ Rwy 9 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -21°C or above 54°C.			
ATIS 127.425	DETROIT APP CON 118.95 284.0	WILLOW RUN TOWER 125.275 256.9	GND CON 119.975

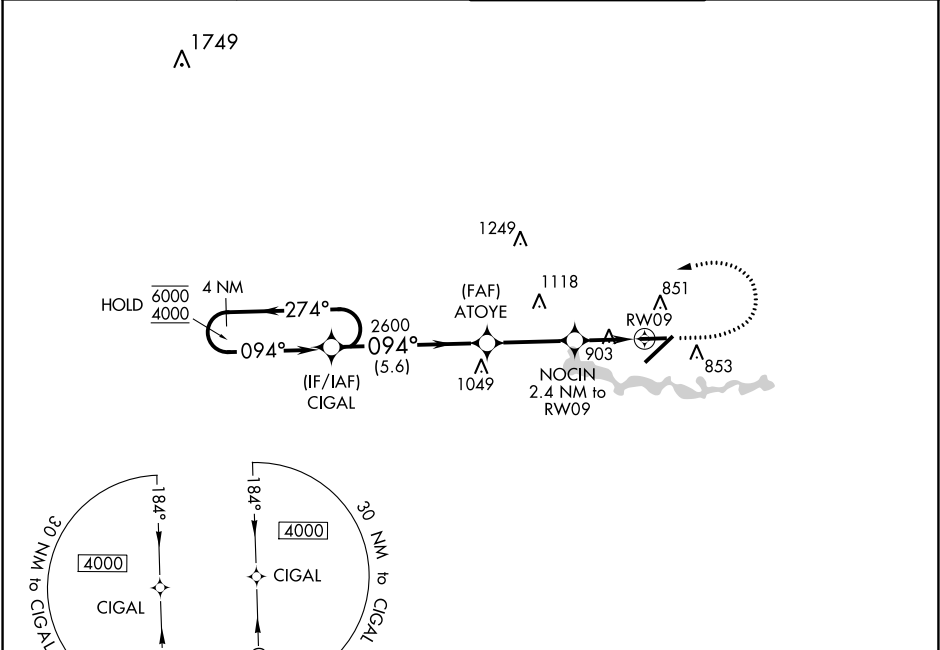

ELEV 716		D TDZE 716		
4 NM Holding Pattern		VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 40).		
CIGAL		CIGAL		
6000 ← 274° 4000 → 094°		ATOYE		
GP 3.11° TCH 50		NOCIN 2.4 NM to RW09		
2600		1.3 NM to RW09		
1560		RW09		
5.6 NM		3.2 NM		
1.2 NM		1.3		
CATEGORY	A	B	C	D
LPV DA	966-¾		250 (300-¾)	
LNAV/VNAV DA	1201-1⅜		485 (500-1⅜)	
LNAV MDA	1160-1	444 (500-1)	1160-1⅜	444 (500-1⅜)
CIRCLING	1220-1	504 (600-1)	1220-1½ 504 (600-1½)	1400-2¼ 684 (700-2¼)

TDZ/CL Rwy 5
HIRL Rwy 5-23
MIRL Rwy 9-27