

WAAS CH 82129 W16A	APP CRS 162°	Rwy Idg TDZE Apt Elev	5000 176 177
--	------------------------	-----------------------------	---

RNAV (GPS) RWY 16

CHEHALIS-CENTRALIA (CLS)


⚠

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -1.5°C (5°F) or above 54°C (130°F). Circling NA northeast of Rwy 16-34. DME/DME RNP-0.3 NA. Baro-VNAV and VDP NA when using Olympia altimeter setting. When local altimeter setting not received, use Olympia altimeter setting: increase LPV DA to 522 feet, LNAV/VNAV DA to 878 feet and all MDA 60 feet; increase LPV all Cats visibility ¼ SM, LNAV Cat B ¼ SM, LNAV Cats C/D ½ SM and Circling Cat B ¼ SM. Rwy 16 helicopter visibility reduction below ¾ SM NA.

MISSED APPROACH:

Climb to 900 then climbing right turn to 5000 direct CETUV and hold, continue climb-in-hold to 5000.

AWOS-3 118.025	SEATTLE APP CON 121.1 377.15	UNICOM 122.8 (CTAF) 0
--------------------------	--	---------------------------------

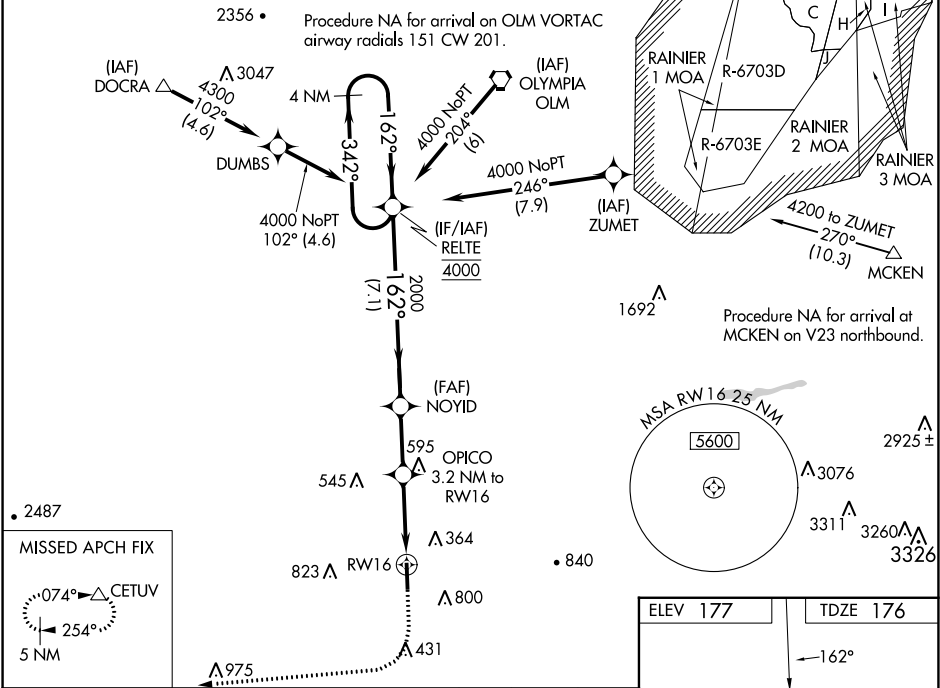

4 NM Holding Pattern RELTE NOYD OPICO 3.2 NM to RW16 *2.2 NM to RW16 RW16 *LNAV only GP 3.00° TCH 35 *1220 4000 ← 342° 162° → 4000 162° 2000 2000 7.1 NM 2.4 NM 1 NM 2.2 NM		900		5000		CETUV		
		↑		↷		△		
CATEGORY	A	B	C	D				
LPV DA	476-1 300 (300-1)							
LNAV/VNAV DA	832-2½ 656 (700-2½)							
LNAV MDA	900-1 724 (800-1)			900-2 724 (800-2)				
CIRCLING	900-1		1080-1¼		1200-3		1300-3	
	723 (800-1)		903 (1000-1¼)		1023 (1100-3)		1123 (1200-3)	

