


WAAS CH 78441 W01A	APP CRS 007°	Rwy Idg TDZE 6006 636 Apt Elev 644
--	------------------------	--

RNAV (GPS) RWY 1

RICHARD B RUSSELL RGNL - J H TOWERS FLD (RMG)

RNP APCH - GPS.	MALSR	MISSED APPROACH: Climb to 1200 then climbing right turn to 3000 direct WOBIK and hold.
▼ Rwy 1 helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -7°C or above 54°C. Circling NA west of Rwy 1-19 at night. Circling NA northwest of Rwy 7 and 19. For inop ALS, increase LPV all Cats visibility to ¾ SM, LNAV/VNAV all Cats visibility to 1 SM, LNAV Cats A/B visibility to 1 SM, and LNAV Cats C/D visibility to 1 ¾ SM.	A5	

ASOS 119.925	ATLANTA CENTER 124.5 270.325	GCO 121.725	UNICOM 122.725 (CTAF) 0
------------------------	--	-----------------------	-----------------------------------

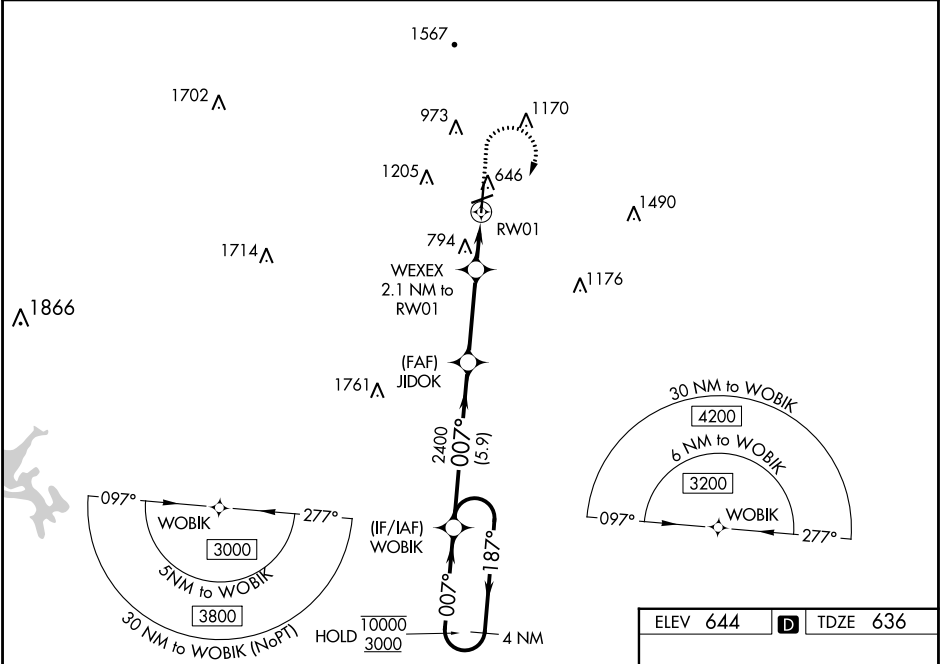

4 NM Holding Pattern WOBIK	10000 3000	187°	007°	007°	JIDOK 2400	WEXEX 2.1 NM to RW01	1200	3000	WOBIK
GP 3.00 TCH 49					2400	1340	1.3 NM to RW01		
					5.9 NM	3.3 NM	0.8 NM	1.3 NM	
CATEGORY	A	B	C	D					
LPV DA		941-¾	305 (300-¾)						
LNAV/VNAV DA		980-¾	344 (400-¾)						
LNAV MDA	1100-¾	464 (500-¾)	1100-1	464 (500-1)					
CIRCLING	1140-1 496 (500-1)	1200-1 556 (600-1)	1480-2½ 836 (900-2½)	1840-3 1196 (1200-3)					

