
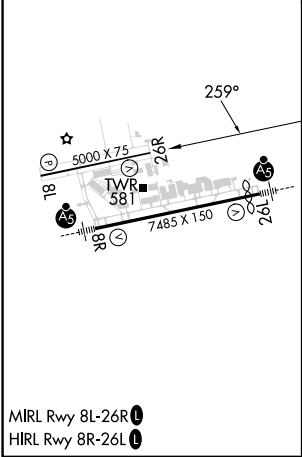


WAAS CH 97414 W26A	APP CRS 259°	Rwy Idg TDZE 463 Apt Elev 463
--	------------------------	---

RNAV (GPS) RWY 26R
SPIRIT OF ST LOUIS (SUS)

RNP APCH - GPS.					MISSED APPROACH: Climb to 3000 direct EXESS and hold.	
▼ ▲ Rwy 26R helicopter visibility reduction below ¾ SM NA. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -18°C or above 54°C. VDP and Baro-VNAV NA when using St Louis Lambert Intl altimeter setting. When local altimeter setting not received, use St Louis Lambert Intl altimeter setting and increase LPV DA to 768 feet, LNAV/VNAV DA to 834 feet, and all MDA 60 feet, increase LPV and LNAV/VNAV all Cats visibility ⅛ mile.						
ATIS 134.8	ST. LOUIS APP CON 126.5 254.3	SPIRIT TOWER★ 124.75 (CTAF) 0 257.2	GND CON 121.7	CLNC DEL 133.1	ST. LOUIS CLNC DEL 121.7 (when tower closed)	UNICOM 122.95

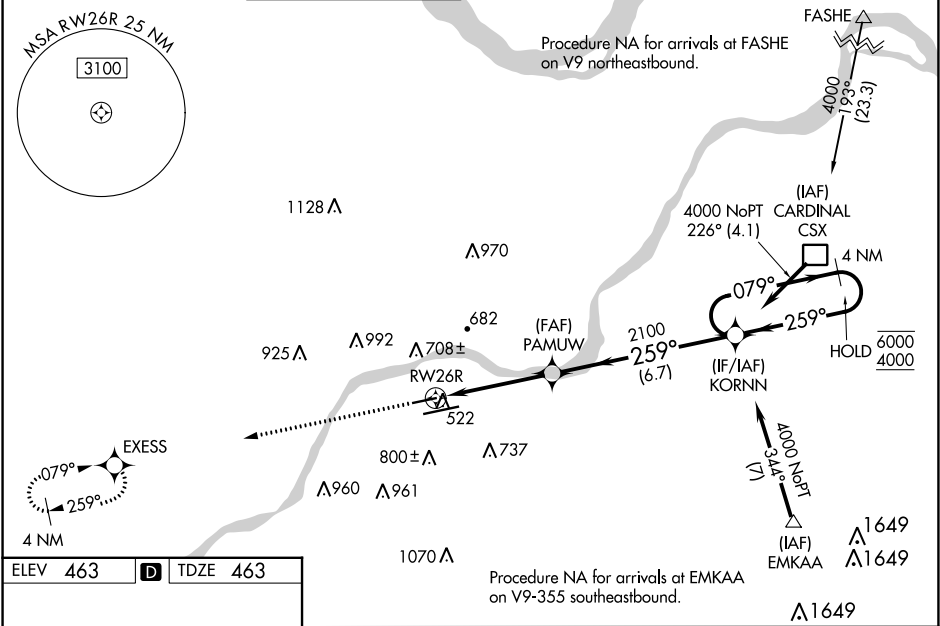

ELEV 463 D TDZE 463		3000 EXESS *LNAV only *1.2 NM to RW26R 1.2 NM 3.1 NM 6.7 NM GP 3.50° TCH 47			
CATEGORY		A	B	C	D
LPV DA		713- $\frac{3}{4}$	250 (300- $\frac{3}{4}$)	NA	
LNAV/VNAV DA		780- $\frac{7}{8}$	317 (400- $\frac{7}{8}$)	NA	
LNAV MDA		940-1	477 (500-1)	NA	
CIRCLING		1100-1 637 (700-1)	1140-1 677 (700-1)	NA	

NC-3, 30 NOV 2023 to 28 DEC 2023

NC-3, 30 NOV 2023 to 28 DEC 2023