

|                                        |                        |                                                 |             |
|----------------------------------------|------------------------|-------------------------------------------------|-------------|
| WAAS<br>CH <b>53626</b><br><b>W08B</b> | APP CRS<br><b>087°</b> | Rwy Idg<br>TDZE <b>96</b><br>Apt Elev <b>96</b> | <b>9402</b> |
|----------------------------------------|------------------------|-------------------------------------------------|-------------|

RNAV (GPS) Z RWY 8R


GEORGE BUSH INTCNL/HOUSTON (IAH)

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -3°C (27°F) or above 54°C (130°F). For inop MALS, increase LPV Cat E visibility to RVR 4000, LNAV/VNAV all Cats visibility to RVR 6000, and LNAV Cat C/D/E visibility to 1 $\frac{3}{4}$ . Simultaneous approach authorized with Rwy 8L and Rwy 9. DME/DME RNP-0.3 NA. Use of FD or AP providing RNAV track guidance required during simultaneous operations. LNAV procedure NA during simultaneous operations.

MALS

MISSED APPROACH:  
Climb to 3000 direct  
MKAYE and hold.

|                         |                                                                          |                                      |                           |                          |       |
|-------------------------|--------------------------------------------------------------------------|--------------------------------------|---------------------------|--------------------------|-------|
| D-ATIS<br><b>124.05</b> | HOUSTON APP CON<br><b>120.05 379.1</b> EAST<br><b>124.35 316.15</b> WEST | HOUSTON TOWER<br><b>125.35 290.2</b> | GND CON<br><b>118.575</b> | CLNC DEL<br><b>128.1</b> | CPDLC |
|-------------------------|--------------------------------------------------------------------------|--------------------------------------|---------------------------|--------------------------|-------|

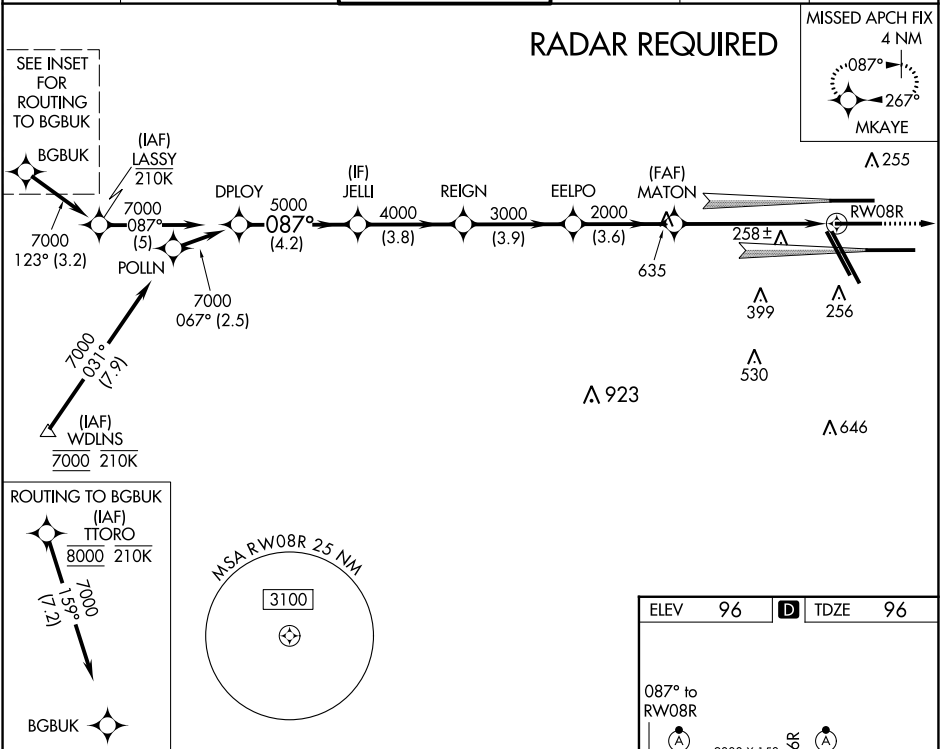

DPLOY

JELLI

REIGN

EELPO

MATON

3000

MKAYE

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 72).

GP 3.00° TCH 55

\*1.3 NM to RW08R

\*LNAV only.

|              |                      |               |        |             |   |
|--------------|----------------------|---------------|--------|-------------|---|
| CATEGORY     | A                    | B             | C      | D           | E |
| LPV DA       | 296/18 200 (200-1/2) |               |        |             |   |
| LNAV/VNAV DA | 421/32 325 (400-3/4) |               |        |             |   |
| LNAV MDA     | 580/24               | 484 (500-1/2) | 580/50 | 484 (500-1) |   |

HIRL all Rwys  
TDZ/CL Rwys 8L/R, 15R, 26L/26R,  
27 and 33L

SC-5, 30 NOV 2023 to 28 DEC 2023

SC-5, 30 NOV 2023 to 28 DEC 2023