WAAS CH 93521 W35A	APP CRS 350°	Rwy ldg 6501 TDZE 1251 Apt Elev 1277

RNAV (GPS) RWY 35
CENTRAL WISCONSIN(CWA)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA.

MALSR

MISSED APPROACH: Climb to 3600 direct DUGTE and hold.

ATIS	MINNEAPOLIS CENTER	CWA TOWER*	GND CON	UNICOM
127.45	124.4 317.7	119.75 (CTAF) L 360.7	121.9 360.7	122.95

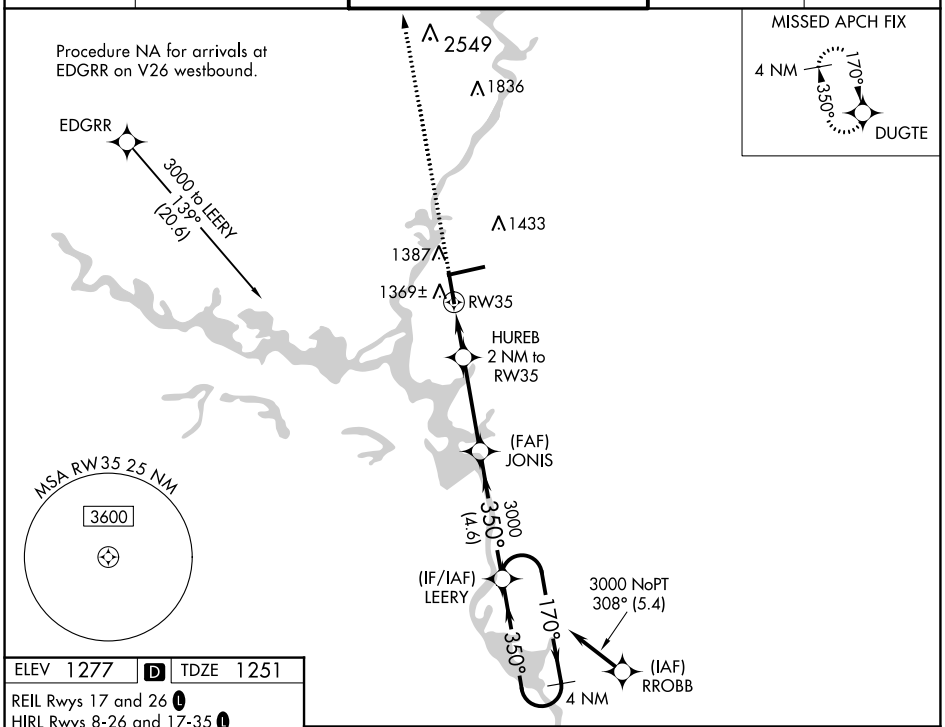

ELEV 1277 | D | TDZE 1251

REIL Rwys 17 and 26 L

HIRL Rwys 8-26 and 17-35 L

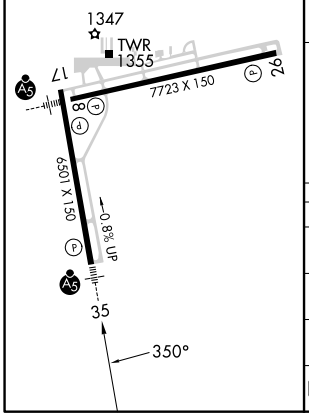

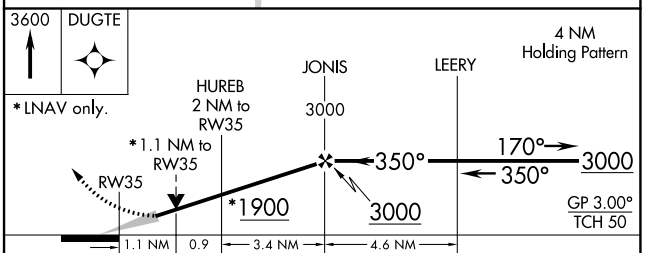

CATEGORY	A	B	C	D
LPV DA	1451-½ 200 (200-½)			
LNAV/VNAV DA	1576-¾ 325 (300-¾)			
LNAV MDA	1620-½ 369 (400-½)		1620-⅝ 369 (400-⅝)	
C CIRCLING	1740-1 463 (500-1)		1740-1½ 463 (500-1½)	1840-2 563 (600-2)

EC-3, 30 NOV 2023 to 28 DEC 2023