

DESTIN, FLORIDA

AL-5680 (FAA)

21168


WAAS CH 48923 W14A	APP CRS 143°	Rwy Idg 5001 TDZE 22 Apt Elev 22
--	------------------------	---

RNAV (GPS) RWY 14
DESTIN EXEC (DTS)


For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C (32°F) or above 54°C (130°F).
Baro-VNAV and VDP NA when using Crestview altimeter setting. Rwy 14 helicopter visibility reduction below ¾ SM NA. DME/DME RNP-0.3 NA. When local altimeter setting not received, use Crestview altimeter setting and increase all DA/MDA 80 feet; increase LPV all Cats visibility ½ SM, LNAV/VNAV all Cats visibility ¾ SM, increase LNAV Cats C and D ½ SM, and Circling Cats C and D ¼ SM.

MISSED APPROACH:
Climb to 2000 direct
AJUP and hold.

ATIS 133.925	EGLIN APP CON 132.1 360.6	DESTIN TOWER ★ 118.45 (CTAF) 0	GND CON 121.6	CLNC DEL 121.6	CLNC DEL 127.7 377.2 (When twr closed)	UNICOM 123.075
------------------------	-------------------------------------	---	-------------------------	--------------------------	---	--------------------------

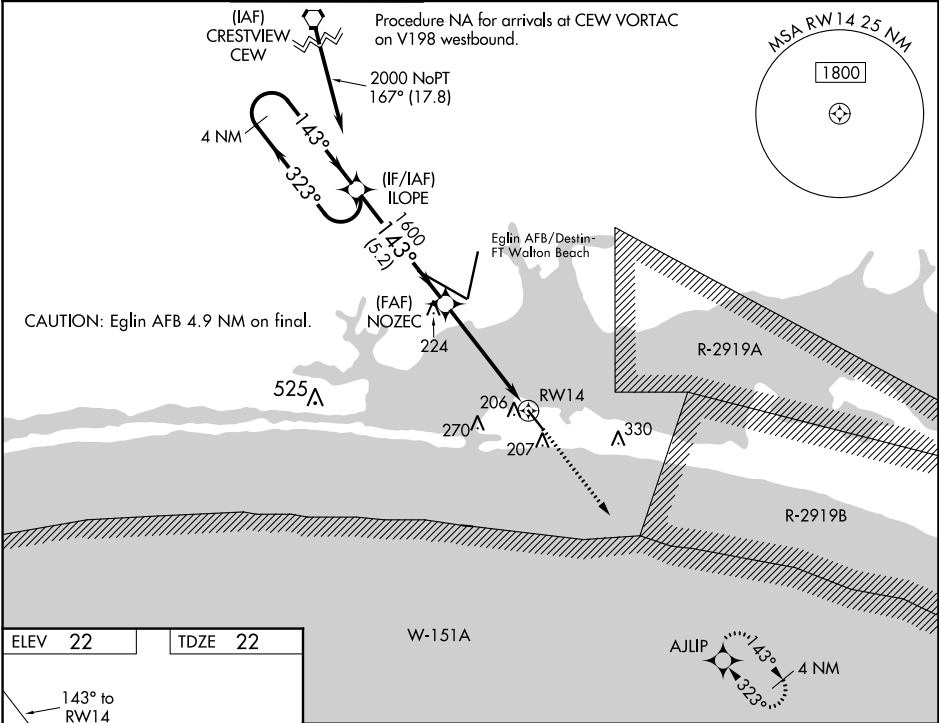

ELEV 22	TDZE 22
----------------	----------------

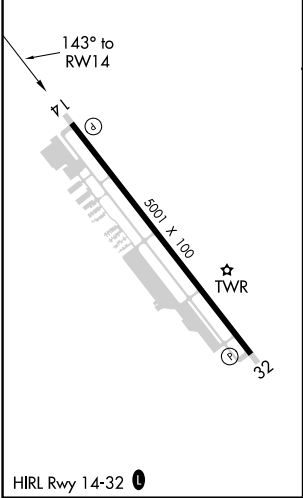

4 NM Holding Pattern ILOPE		2000	↑	AJUP
GP 3.00° TCH 43		1600	*INAV only.	
5.2 NM		3.6 NM	1.2 NM to RWY 14	
CATEGORY	A	B	C	D
LPV DA	272-1 250 (300-1)			
INAV/VNAV DA	367-1½ 345 (400-1½)			
INAV MDA	460-1	438 (500-1)	460-1¼	438 (500-1¼)
CIRCLING	580-1	558 (600-1)	680-1¾ 658 (700-1¾)	680-2 658 (700-2)

DESTIN, FLORIDA
Amdt 2C 07DEC17

30°24'N-86°28'W

DESTIN EXEC (DTS)
RNAV (GPS) RWY 14

SE-3, 30 NOV 2023 to 28 DEC 2023

SE-3, 30 NOV 2023 to 28 DEC 2023