

PHOENIX-MESA GATEWAY (IWA)(KIWA) 20 SE UTC-7 N33°18.47' W111°39.33'
 1384 B TPA—See Remarks Class I, ARFF Index C NOTAM FILE IWA MON Airport
RWY 12R-30L: H10401X150 (CONC) S-55, D-95, 2S-120, 2D-185,

PHOENIX
H-4J, L-5B, A
IAP, AD

2D/2D2-550 PCN 62 R/C/W/T MIRL
RWY 12R: PAPI(P4L)—GA 3.0° TCH 60'. Rgt tfc. 0.3% up.
RWY 30L: PAPI(P4L)—GA 3.0° TCH 60'. 0.4% down.
RWY 12C-30C: H10201X150 (ASPH-CONC) S-55, D-95, 2S-120,
 2D-185, 2D/2D2-550 PCN 71 R/D/W/T HIRL
RWY 12C: PAPI(P4L)—GA 3.0° TCH 50'. 0.3% up.
RWY 30C: PAPI(P4L)—GA 3.0° TCH 49'. 0.3% down.
RWY 12L-30R: H9300X150 (CONC) S-75, D-210, 2S-175, 2D-590,
 2D/2D2-850 PCN 88 R/C/W/T HIRL
RWY 12L: REIL. PAPI(P4L)—GA 3.0° TCH 74'. 0.3% up.
RWY 30R: REIL. PAPI(P4L)—GA 3.0° TCH 75'. Rgt tfc. 0.3% down.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 12C:TORA-10201 TODA-10201 ASDA-10201 LDA-10201
RWY 12L:TORA-9300 TODA-9300 ASDA-9300 LDA-9300
RWY 12R:TORA-10401 TODA-10401 ASDA-10401 LDA-10401
RWY 30C:TORA-10201 TODA-10201 ASDA-10201 LDA-10201
RWY 30L:TORA-10401 TODA-10401 ASDA-10401 LDA-10401
RWY 30R:TORA-9300 TODA-9300 ASDA-9300 LDA-9300

SERVICE: S6 FUEL 100LL, JET A OX 3, 4 LGT When ATCT clsd lgts on consly.

NOISE: Noise abatement procedures in effect. Avoid low overflight of noise sensitive areas; info—480-988-7637.

AIRPORT REMARKS: Attended continuously. Fuel avbl H24—480-988-7700 or 129.875. Wildlife invof arpt. Rwy 30R sport field lgtg E of apch. Non emergency AV-8 model ops limited to Rwy 12L-30R. 24 hr PPR unscheduled acr ops gtr than 30 pax seats—arpt ops. Large/heavy inboard engine taxi only. Twy T avbl to wingspan btn 119-170 ft with wing walkers from Twy W south of Twy V. 7 ft fence S portion of middle ramp. Twy Y rstd to wingspan less than 79 ft. TPA—Fixed Wing 2602(1218), Jet 3102(1718), Rotorcraft 2102(718). U.S. Government owned, non-revenue and flight training up to 12,500 lbs landing fee NA. NOTE: See Special Notices—Arrival Alert.

AIRPORT MANAGER: 480-988-7708

WEATHER DATA SOURCES: AWOS-3 133.5 (480) 988-9428. AWOS is available from 0700-1200Z† (mst) on 133.5, or 24 hrs via phone: 480-988-9428.

COMMUNICATIONS: CTAF 120.6 ATIS 133.5 (1200-0700Z)

Ⓡ **PHOENIX APP/DEP CON** 124.9

GATEWAY TOWER 120.6 1200-0700Z **GND CON** 128.25

CLNC DEL 135.05

CLEARANCE DELIVERY PHONE: For CD when ATCT clsd, ctc Phoenix Apch at 602-306-2565.

AIRSPACE: CLASS D svc 1200-0700Z; other times CLASS G.

RADIO AIDS TO NAVIGATION: NOTAM FILE IWA.

WILLIE (L) (L) VORTACW 113.3 IWA Chan 80 N33°18.19' W111°39.09' at fld. 1367/13E.

VOR unusable:

300°-320° byd 25 NM blo 7,500'

320°-300° byd 20 NM blo 7,500'

TACAN AZIMUTH unusable:

020°-055° byd 30 NM blo 12,000'

150°-195° byd 20 NM blo 7,500'


DME unusable:

020°-055° byd 30 NM blo 12,000'

150°-195° byd 20 NM blo 7,500'

ILS 110.15 I-IWA Rwy 30C. Class IE. LOC unusable byd 25° left and right of course. Unmonitored 1200-1900Z†.

COMM/NAV/WEATHER REMARKS: AWOS is avbl from 0700-1200Z on 133.5, or 24 hrs via phone 480-988-9428.

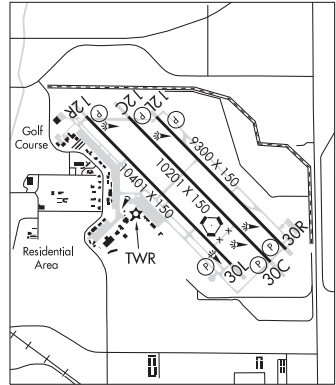

PHOENIX GOODYEAR (See GOODYEAR on page 54)