

VORTAC ABQ	APP CRS	Rwy Idg
113.2	077°	12793
Chan 79		5320
		Apt Elev 5355

VOR RWY 8
ALBUQUERQUE INTL SUNPORT (ABQ)

⚠


ASR

EYECE FIX MINIMUMS: For inop ALS, increase S-8 Cat C/D/E visibility to RVR 5500.
For inop ALS, increase S-8 Cat E visibility to 3 SM.
Circling Cat E NA southeast of Rwy 3-21 and northeast of Rwy 12-30.

MALSR

MISSED APPROACH: Climb to 5800 then climbing right turn to 8000 direct ABQ VORTAC and hold.

D-ATIS	ALBUQUERQUE APP CON	ALBUQUERQUE TOWER	GND CON	CLNC DEL	CPDLC
118.0 257.7	123.9 354.1	120.3 351.9	121.9 348.6	119.2 259.3	

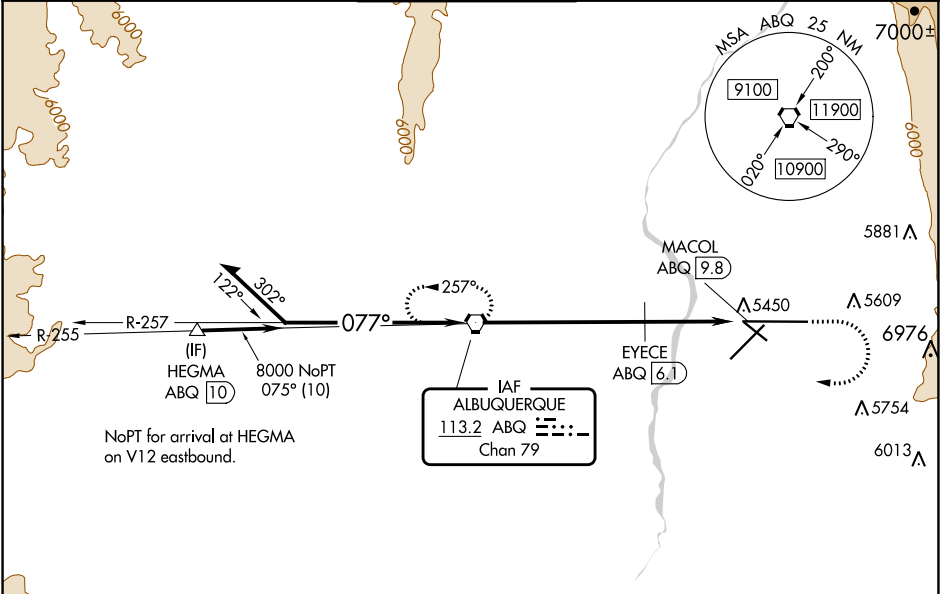

ELEV 5355

TDZE 5320

Remain within 15 NM

ABQ VORTAC

8200

257°

077°

8000

6380

6.1 NM

2.6 NM

1.1 NM

5800

8000

ABQ

EYECE ABQ 6.1

ABQ 8.7

MACOL ABQ 9.8

077°

TWR 5533

13793 X 150

0.5% DOWN

6000 X 150

10000 X 150

MIRL Rwy 12-30

TDZ/CL Rwy 3 and 8

HIRL Rwy 3-21 and 8-26

REIL Rwy 21, 26, and 30

FAF to MAP 9.8 NM

CATEGORY	A	B	C	D	E
S-8	6380/40 1060 (1100-¾)	6380/55 1060 (1100-1)	6380-2½	1060 (1100-2½)	
CIRCLING	6380-1¼ 1025 (1100-¼)	6380-1½ 1025 (1100-½)	6380-3 1025 (1100-3)	6460-3 1105 (1200-3)	7460-3 2105 (2200-3)
EYECE FIX MINIMUMS					
S-8	5700/24	380 (400-½)	5700/40	380 (400-¾)	
CIRCLING	5840-1 485 (500-1)	5920-1 565 (600-1)	5940-1½ 585 (600-1½)	6460-3 1105 (1200-3)	7460-3 2105 (2200-3)

Knots	60	90	120	150	180
Min:Sec	9:48	6:32	4:54	3:55	3:16

SW-1, 21 MAR 2024 to 18 APR 2024

SW-1, 21 MAR 2024 to 18 APR 2024