

LOC I-VVS

110.7

APP CRS

049°

Rwy Idg

3833

TDZE

1254

Apt Elev

1264

LOC RWY 5

JOSEPH A HARDY CONNELLVILLE (VVS)

ADF required.

NA

Circling NA for Cat C south of Rwy 5-23. Rwy 14, 23, 32 helicopter visibility reduction below 1 SM NA. When local altimeter setting not received, use Morgantown WV altimeter setting and increase all MDA 60 feet and S-5 Cat C visibility ½ SM.

MISSED APPROACH: Climb to 2600 then climbing left turn to 4300 direct VVS NDB and hold, continue climb-in-hold to 4300.

AWOS-3P


133.325

CLARKSBURG APP CON ★

119.425 284.65

UNICOM

122.8 (CTAF) 1

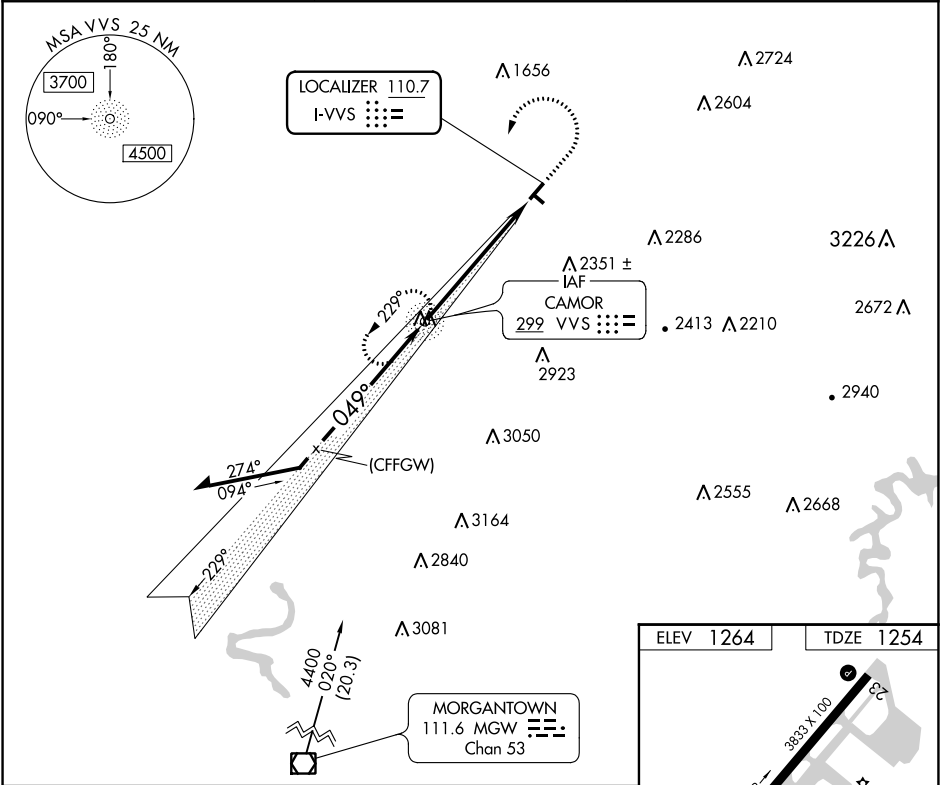

Remain within 10 NM

4300

229°

049°

VVS NDB

3100

2.97°

TCH 41

5.8 NM

ELEV 1264

TDZE 1254

REIL Rwy 5 1

MIRL Rwy 5-23 and 14-32 1

FAF to MAP 5.8 NM

|         |      |      |      |      |      |
|---------|------|------|------|------|------|
| Knots   | 60   | 90   | 120  | 150  | 180  |
| Min:Sec | 5:48 | 3:52 | 2:54 | 2:19 | 1:56 |

| CATEGORY | A                     | B                        | C                       | D  |
|----------|-----------------------|--------------------------|-------------------------|----|
| S-5      | 1660-1                | 406 (400-1)              | 1660-1⅛<br>406 (400-1⅛) | NA |
| CIRCLING | 1920-1<br>656 (700-1) | 2260-1½<br>996 (1000-1½) | 2540-3<br>1276 (1300-3) | NA |