SAN ANTONIO, TEXAS

ILS or LOC/DME Y RWY 16

LOC I-SKF	APCH CRS	Rwy Idg 11,550
110.1	158°	TDZE 690
		Arpt Elev 690

AL-371 [USAF] KELLY FLD (KSKF)

▼ *When ALS inop, increase RVR to 40 and vis to ¾ mile.
**When ALS inop, increase CAT AB RVR to 55 and vis to 1 mile, CAT CDE RVR to 60 and vis to 1⅛ miles.

ALSF-1 (A1)

MISSED APPROACH: Climb to 2500 via KSY R-163 until 4 DME, then continue climb to 3000 to FITER/15 DME and hold. Non-TACAN equipped aircraft expect alternate missed approach instructions.

ATIS	SAN ANTONIO APP CON	TOWER	GND CON
120.45 273.5	118.05 353.5	124.3 322.35	121.8 289.4

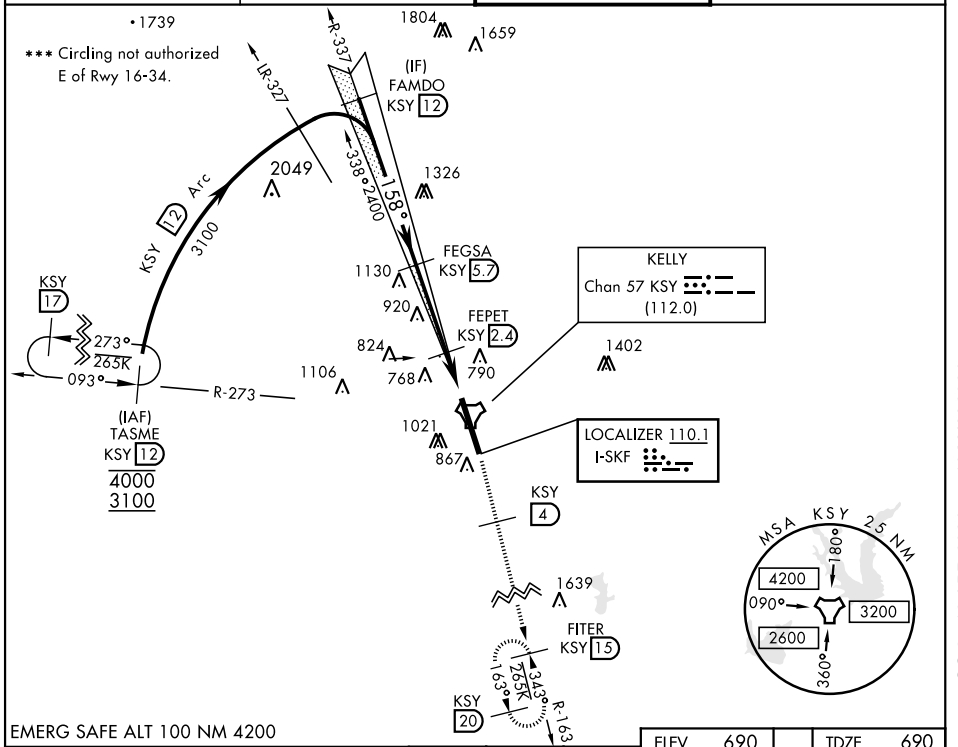

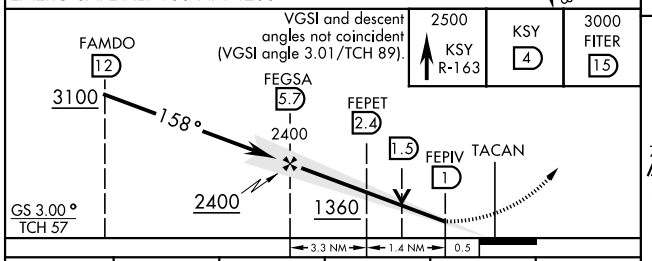

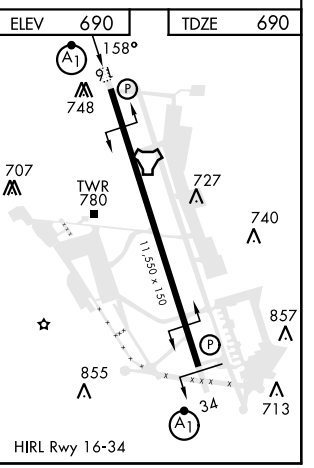

CATEGORY	A	B	C	D	E
S-ILS 16*	890/24		200		(200-½)
S-LOC/DME 16**	1080/24	390 (400-½)	1080/35	390	(400-⅝)
C CIRCLING***	1200-1 510 (600-1)	1280-1 590 (600-1)	1340-1¾ 650 (700-1¾)	1400-2¼ 710 (800-2¼)	1900-3 1210(1300-3)

SAN ANTONIO, TEXAS 29°23'N-98°35'W KELLY FLD (KSKF)

Amdt 2 29DEC22

ILS or LOC/DME Y RWY 16

SC-3, 18 APR 2024 to 16 MAY 2024