

RNAV (RNP) Z RWY 26R

ONTARIO INTL (ONT)

APP CRS	Rwy Idg	12197
258°	TDZE	932
	Apt Elev	944


RNP AR APCH - GPS.

▼ For uncompensated Baro-VNAV systems, procedure NA below 1°C or above 54°C. For inop ALS, increase RNP 0.12 visibility all Cats to RVR 4500, RNP 0.21 visibility all Cats to RVR 5500, RNP 0.30 visibility all Cats to RVR 6000.

ALSF-2


MISSED APPROACH: Climb to 3400 on track 258° to EGYAZ and track 173° to LAKVE and track 122° to MARIAM and on track 079° to ADRYN and hold.

D-ATIS	SOCAL APP CON	ONTARIO TOWER	GND CON	CLNC DEL	CPDLC
124.25	127.0 318.2	120.6 360.775	121.9 257.8	132.9	


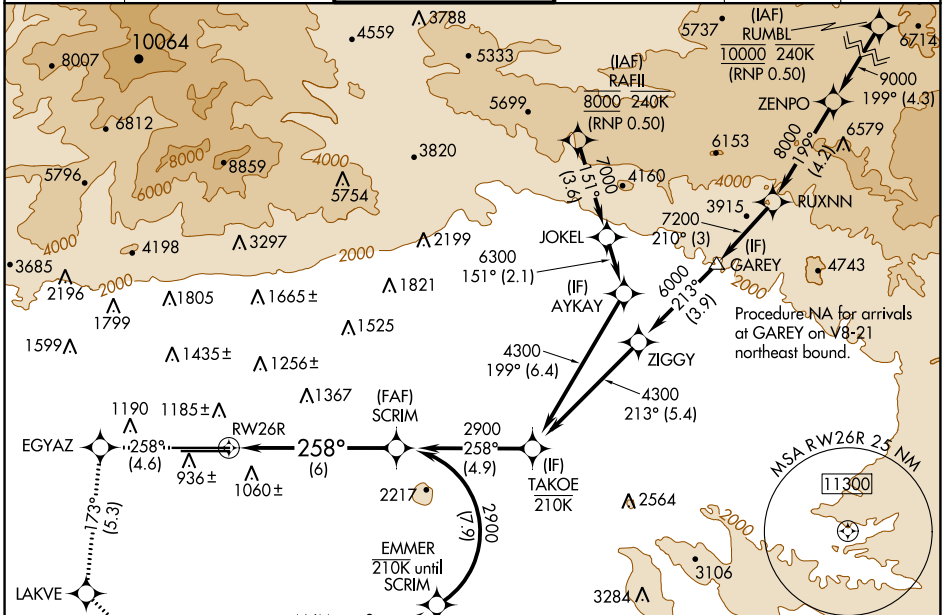


SW-3, 18 APR 2024 to 16 MAY 2024

SW-3, 18 APR 2024 to 16 MAY 2024



ELEV	944	TDZE	932
------	-----	------	-----

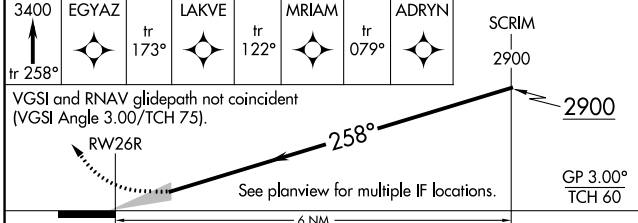

CATEGORY	A	B	C	D
RNP 0.12 DA		1239/40	307 (300-¾)	
RNP 0.21 DA		1297/40	365 (400-¾)	
RNP 0.30 DA		1321/40	389 (400-¾)	

AUTHORIZATION REQUIRED

TDZ/CL Rwsy 8L, 26R and 26L
HIRL Rwsy 8L-26R and 8R-26L