

MIAMI INTL (MIA)(KMIA) 8 NW UTC-5(-4DT) N25°47.72' W80°17.41' **MIAMI**
 9 B AOE Class I, ARFF Index E NOTAM FILE MIA **H-8I, L-23C, A**
RWY 09-27: H13016X150 (ASPH-GRVD) S-120, D-250, 2S-175, 2D-550, 2D/2D2-1120 **IAP, AD**
 PCR 851 F/A/X/T HIRL CL
RWY 09: MALSR. PAPI(P4L)—GA 3.0° TCH 72'. RVR-TMR Thld dsplcd 1358'. Railroad. Rgt tfc.
RWY 27: MALSR. PAPI(P4L)—GA 3.0° TCH 71'. RVR-TMR Thld dsplcd 261'.
RWY 08R-26L: H10506X200 (ASPH-GRVD) S-120, D-250, 2S-175, 2D-550, 2D/2D2-1120 PCR 851 F/A/X/T HIRL CL
RWY 08R: MALSR. TDZL. PAPI(P4L)—GA 3.0° TCH 77'. RVR-TR
RWY 26L: MALSF. PAPI(P4L)—GA 3.0° TCH 73'. RVR-TR Rgt tfc.
RWY 12-30: H9360X150 (ASPH-GRVD) S-120, D-250, 2S-175, 2D-550, 2D/2D2-1120 PCR 780 F/A/X/T HIRL CL
RWY 12: MALSR. PAPI(P4R)—GA 3.0° TCH 71'. RVR-TR Tower.
RWY 30: MALS. PAPI(P4L)—GA 3.0° TCH 71'. RVR-TR Thld dsplcd 945'. Tree.
RWY 08L-26R: H8600X150 (ASPH-GRVD) S-120, D-250, 2D-550, 2D/2D2-1120 PCR 711 F/A/X/T HIRL CL
RWY 08L: REIL. PAPI(P4L)—GA 3.0° TCH 60'.
RWY 26R: REIL. PAPI(P4L)—GA 3.0° TCH 60'.

LAND AND HOLD—SHORT OPERATIONS

LDG RWY	HOLD—SHORT POINT	AVBL LDG DIST
RWY 09	12-30	9749
RWY 12	09-27	8100

RUNWAY DECLARED DISTANCE INFORMATION

RWY 08L:TORA-8600 TODA-8600 ASDA-8600 LDA-8600
RWY 08R:TORA-10506 TODA-10506 ASDA-10506 LDA-10506
RWY 09: TORA-13016 TODA-13016 ASDA-12755 LDA-11397
RWY 12: TORA-9355 TODA-9355 ASDA-8579 LDA-8579
RWY 26L:TORA-10506 TODA-10506 ASDA-10220 LDA-10220
RWY 26R:TORA-8600 TODA-8600 ASDA-8600 LDA-8600
RWY 27: TORA-13016 TODA-13016 ASDA-13016 LDA-12755
RWY 30: TORA-9355 TODA-9355 ASDA-8853 LDA-7913

SERVICE: S4 FUEL 100, JET A OX 1, 2, 3, 4

NOISE: Close-in noise abatement dep profile to be used by A319/320/321, A330-200/300, B727-200, B737-800/900, B767-200/300/400/700, B747-800, B777-300/77L/77W, and MD-11. Dsnt noise abatement dep profile to be used by all other turbojet acft. All Turbojet acft use dsnt noise abatement dep profile fm all rwy exc A320, B727, B737/900, B767/400, and DC9 which should use close-in noise abatement profile.

AIRPORT REMARKS: Attended continuously. Birds on and invof arpt. CLOSED non-engine acft. Rwy 08L-26R CLOSED 0800-1700Z† when Rwy 08R-26L and Rwy 09-27 are in use. Rwy 12-30 CLOSED 0800-1700Z† when Rwy 08R-26L and Rwy 09-27 are in use. No int dep auth wo PPR fm amgr. Acft with wingspan greater than 78' are prohibited from entering the GAC ramp. Acft with a wingspan greater than 171' are prohibited from taxiing on Twy P, east of Twy U. PPR for inbd mil flts 100 NM on freq 130.5. All diversion ctc frequency 130.5 upon arrival. All medical emerg arr, with the exception of air ambulance flts, must secure doors until ARFF is on scene. ASDE-X in use. Operate transponders with altitude reporting mode and ADS-B (if equipped) enabled on all airport surfaces. US CBP and EAPIS avbl. Flight Notification Service (ADCUS) avbl.

AIRPORT MANAGER: 305-876-7038

WEATHER DATA SOURCES: ASOS 119.15 (305) 870-0235. TDWR.

COMMUNICATIONS: D-ATIS ARR 119.15 (305) 869-5445 D-ATIS DEP 133.675 (305) 869-5446 UNICOM 123.0

Ⓡ APP CON 124.85 (270°-089°) 120.5 (090°-269°) 125.75 (270°-089°)

TOWER 118.3 (270°-089°) 123.9 (090°-269°) GND CON 121.8 (Rwy 8L, 8R, 12, 26L, 26R) 127.5 (Rwy 09, 27, 30)

CLNC DEL 135.35 RAMP CTL 120.35

Ⓡ DEP CON 119.45 (270°-089°) 125.5 (090°-269°)

CDLCL (LOGON KUSA)

PDC

AIRSPACE: CLASS B See VFR Terminal Area Chart.

CONTINUED ON NEXT PAGE

CONTINUED FROM PRECEDING PAGE

RADIO AIDS TO NAVIGATION: NOTAM FILE MIA.

DOLPHIN (VH) (H) VORTAC 113.9 DHP Chan 86 N25°48.00' W80°20.94' 099° 3.2 NM to fld. 6/4W.

TACAN AZIMUTH unusable:

055°-065° byd 35 NM blo 3,000'

185°-195° byd 23 NM

226°-236° byd 35 NM

DME unusable:

055°-065° byd 35 NM blo 3,000'

VOR unusable:

034°-037° byd 40 NM

090°-101° byd 40 NM blo 5,500'

090°-101° byd 54 NM

102°-111° byd 40 NM

LOC/DME 109.3 I-ROY Chan 30 Rwy 08L. LOC unusable byd 30° left of course and 25° right of course. DME unusable byd 30° left of course.

ILS/DME 110.3 I-MFA Chan 40 Rwy 08R. Class IT. DME unusable byd 23° right of course. LOC unusable byd 20° right of course.

ILS/DME 110.9 I-BUL Chan 46 Rwy 09. Class IA.

ILS/DME 108.9 I-GEM Chan 26 Rwy 12. Class IT. Glideslope unusable byd 5° right of course; byd 6° left of course.

ILS/DME 109.1 I-VIN Chan 28 Rwy 26L. Class IE.

LOC/DME 109.3 I-CNV Chan 30 Rwy 26R.

ILS 109.5 I-MIA Rwy 27. Class IT.

ILS/DME 111.7 I-DCX Chan 54 Rwy 30. Class IE.

COMM/NAV/WEATHER REMARKS: PPR 3 hrs prior to all arr on the General Aviation Center (GAC) ramp 305-876-7550 ctc Ramp Ctl and upon arr on freq 131.600.

MIAMI-OPA LOCKA EXEC (OPF)(KOPF) P (CG) 10 N UTC-5(-4DT) N25°54.45' W80°16.69'

MIAMI

8 B LRA NOTAM FILE OPF

H-8I, L-23C, A

IAP, AD

RWY 09L-27R: H8002X150 (ASPH-GRVD) S-120, D-249, 2S-175,

2D-484, 2D/2D2-1000 PCN 61 F/A/W/T HIRL

RWY 09L: MALSR. PAPI(P4L)—GA 3.0° TCH 55'. Trees.

RWY 27R: MALS. PAPI(P4L)—GA 3.0° TCH 58'. Trees. Rgt tfc.

RWY 12-30: H6800X150 (ASPH-GRVD) S-120, D-249, 2D-484,

2D/2D2-1000 PCN 61 F/A/X/T HIRL

RWY 12: MALSR. PAPI(P4L)—GA 3.0° TCH 53'. Thld dspcd 800'.

Trees.

RWY 30: PAPI(P4L)—GA 3.0° TCH 52'. Tree.

RWY 09R-27L: H4309X100 (ASPH-GRVD) S-96, D-154

PCN 36 F/A/Y/T MIRL

RWY 09R: VASI(V4L)—GA 3.0° TCH 26'. Pole. Rgt tfc.

RWY 27L: PAPI(P4L)—GA 3.0° TCH 50'. Trees.

RUNWAY DECLARED DISTANCE INFORMATION

RWY 09L:TORA-8002 TODA-8202 ASDA-8202 LDA-8002

RWY 09R:TORA-4306 TODA-4306 ASDA-4306 LDA-4306

RWY 12: TORA-6800 TODA-7800 ASDA-7000 LDA-6000


RWY 27L:TORA-4306 TODA-4306 ASDA-4306 LDA-4306

RWY 27R:TORA-8002 TODA-8202 ASDA-8202 LDA-8002

RWY 30: TORA-6800 TODA-7000 ASDA-7000 LDA-6800

SERVICE: S4 **FUEL** 100LL, JET A **OX** 1, 2, 3, 4 **LGT** When ATCT clsd ACTVT MALSR Rwy 12; PAPI Rwy 12 and 30; HIRL Rwy 12-30—CTAF. 30 min PPR to req actvn of MALSR Rwy 09L; MALS Rwy 27R; PAPI Rwy 09L and 27R; HIRL Rwy 09L-27R—305-869-1660 and RCF. **MILITARY—FUEL** J5 (PPR CG) A+ (C305-687-8410.) (NC-100LL, A) Contract fuel—305-685-4646. **FLUID** LHGX

NOISE: Noise sensitive arpt. Flt T is ltd to acct 40,000 lbs max gross tkof wt and blw & only btn 1200-0400Z±. Specific tfc pats are published for hel and fixed wing tfc; compliance is mandatory. Obtain info fm ATCT or FBO or amrg; or req specific tfc pat instructions on initial ctc. Rwy 09L-27R clsd dly 0400-1200Z± PPR 60 mins—305-869-1660 for acct noise abatement to srndg arpt community. Rwy 09R-27L clsd dly 0400-1200Z± for acct noise abatement to srndg arpt community.

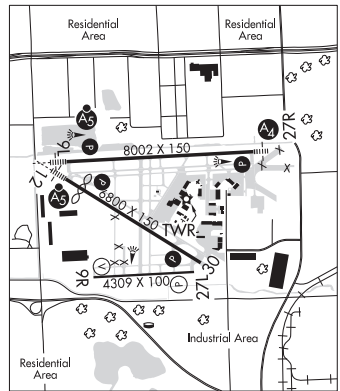

CONTINUED ON NEXT PAGE