WAAS	APP CRS	Rwy Idg 5004
CH 56602	248°	TDZE 949
W25A		Apt Elev 949

RNAV (GPS) RWY 25

GREENE COUNTY/LEWIS A JACKSON RGNL (GDK)

RNP APCH - GPS.

T A For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Rwy 25 helicopter visibility reduction below ¾ SM NA. VDP and Baro-VNAV NA when using Dayton/Wright Brothers altimeter setting. When local altimeter setting not received, use Dayton/Wright Brothers altimeter setting: increase LPV DA to 1249 feet; increase LNAV/VNAV DA to 1252 feet; increase all MDA 40 feet and LNAV visibility Cat C 1⅛ SM.

MISSED APPROACH: Climb to 2700 direct UYOKO and hold.

AWOS-3	COLUMBUS APP CON	UNICOM
118.525	118.85 269.275	122.725 (CTAF) L

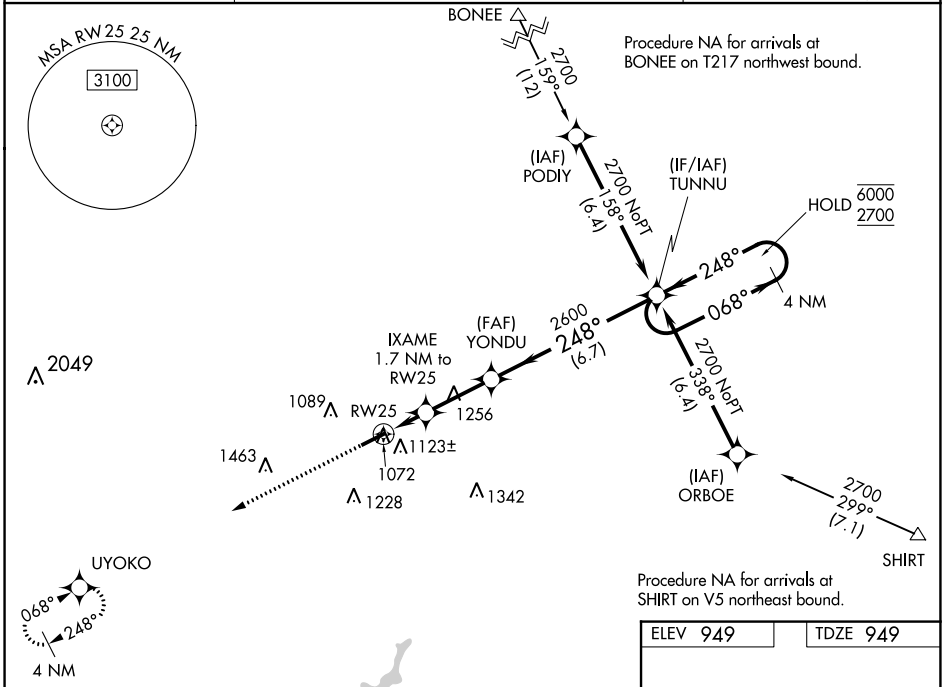

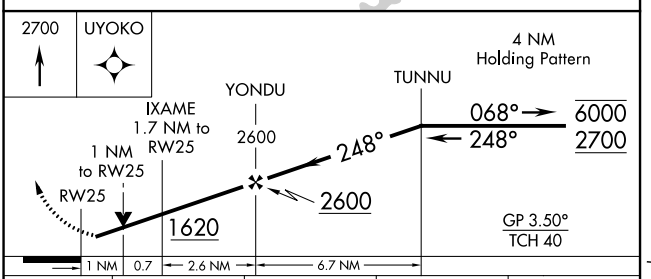



CATEGORY	A	B	C	D
LPV DA	1219-1 270 (300-1)			NA
LNAV/VNAV DA	1222-1 273 (300-1)			NA
LNAV MDA	1340-1 391 (400-1)		1340-1⅛ 391 (400-1⅛)	NA
C CIRCLING	1480-1 531 (600-1)		1560-1¾ 611 (700-1¾)	NA

MIRL Rwy 7-25 L
REIL Rwys 7 and 25 L

EC-2, 16 MAY 2024 to 13 JUN 2024
EC-2, 16 MAY 2024 to 13 JUN 2024