

VORTAC OKW 111.0 Chan 47	APP CRS 076°	Rwy Idg TDZE Apt Elev	6007 700 700
---------------------------------------	------------------------	-----------------------------	---


VOR RWY 5

BESSEMER (EKY)

NA Inoperative table does not apply. When local altimeter setting not received, use Alabaster altimeter setting and increase all MDAs 60 feet; increase S-5 Cat C visibility 1/8 SM and Circling Cat D visibility 1/4 SM.

MISSED APPROACH: Climb to 1500 then climbing right turn to 3000 direct OKW VORTAC and hold.

AWOS-3PT 118.825	BIRMINGHAM APP CON 124.9 351.85	CLNC DEL 123.75	UNICOM 123.0 (CTAF) 0
----------------------------	---	---------------------------	--

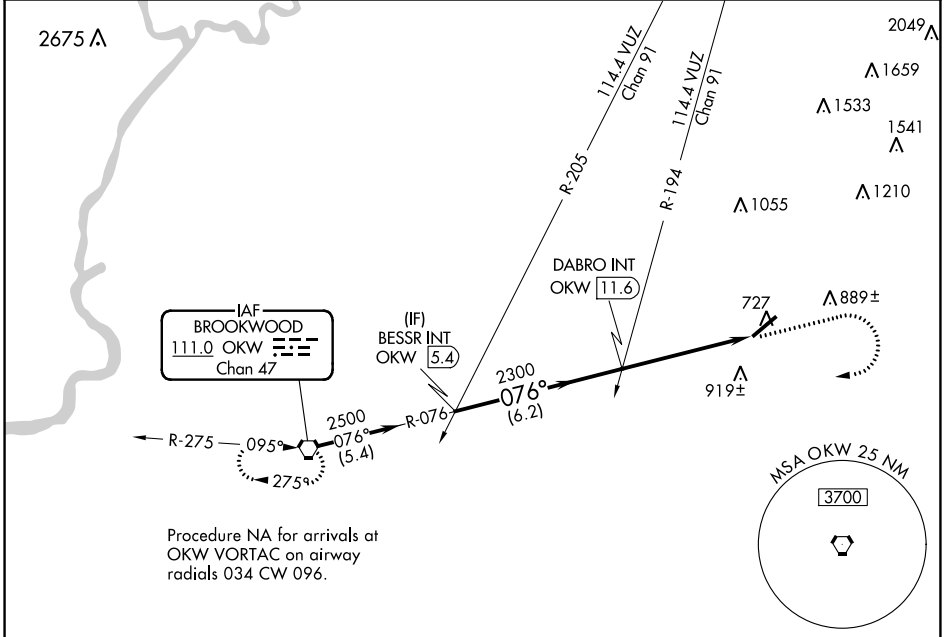

Procedure NA for arrivals at OKW VORTAC on airway radials 034 CW 096.

SE-4, 16 MAY 2024 to 13 JUN 2024

SE-4, 16 MAY 2024 to 13 JUN 2024

ELEV 700		TDZE 700				
CATEGORY	A	B	C	D		
S-5	1180-1 480 (500-1)	1180-1 3/8 480 (500-1 3/8)	1180-1 1/2 480 (500-1 1/2)			
CIRCLING	1200-1 500 (500-1)	1220-1 520 (600-1 1/2)	1320-2 620 (700-2)			
FAF to MAP 4.9 NM						
Knots		60	90	120	150	180
Min:Sed		4:54	3:16	2:27	1:58	1:38