


WAAS Ch <b>45902</b> <b>W10A</b>	APP CRS <b>100°</b>	Rwy Idg TDZE Apt Elev <b>601</b> <b>606</b>
--	------------------------	---

# RNAV (GPS) RWY 10


PURDUE UNIVERSITY (LAF)

When local altimeter setting not received, use Vermilion Rgnl altimeter setting and increase LPV DA to 966 feet and visibility all Cats ½ SM; increase LNAV/VNAV DA to 1172 feet; increase all MDAs 100 feet and LNAV Cats C/D visibility ¼ SM, increase Circling Cat C visibility ½ SM and Cat D visibility ¼ SM. Baro-VNAV NA when using Vermilion Rgnl altimeter setting. VDP NA when using Vermilion Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (4°F) or above 47°C (116°F). For inoperative MALSR, increase LPV all Cats visibility to 1 mile. DME/DME RNP-0.3 NA. Circling Rwy 23 NA at night.

**MALSR** 


**MISSED APPROACH:**  
Climb to 2600 direct OGREY and hold.

ATIS <b>127.75</b>	GRISSOM APP CON* <b>123.85 291.675</b>	LAFAYETTE TOWER* <b>119.6 (CTAF) 0 343.625</b>	GND CON <b>121.9 343.625</b>	UNICOM <b>122.95</b>
-----------------------	---	---	---------------------------------	-------------------------

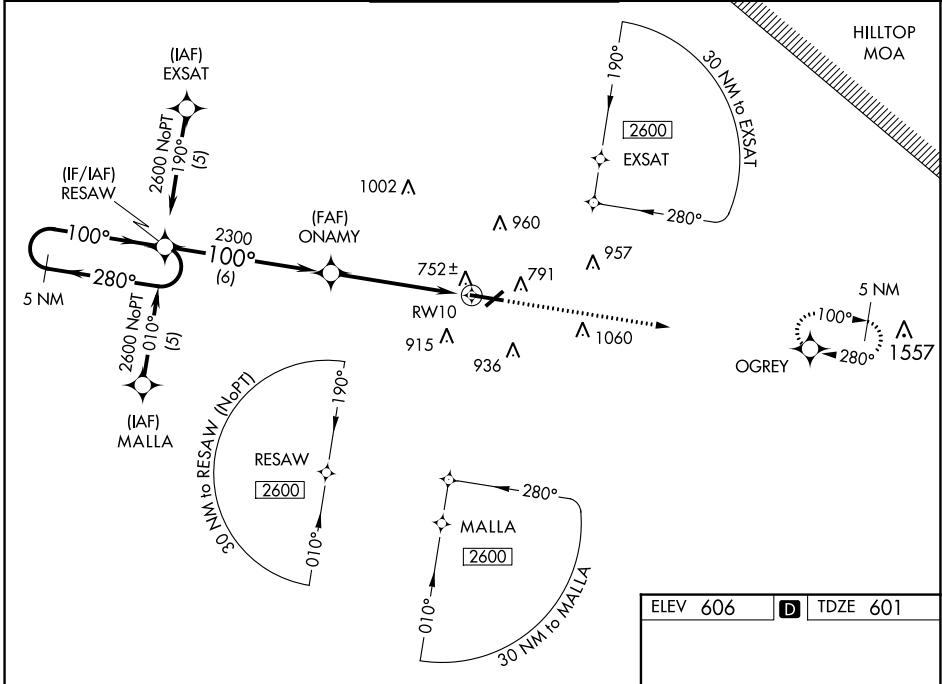


EC-2, 13 JUN 2024 to 11 JUL 2024

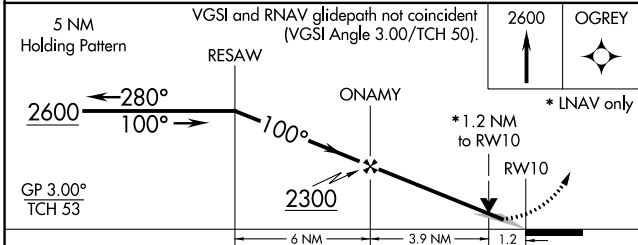

EC-2, 13 JUN 2024 to 11 JUL 2024



ELEV 606	<b>D</b>	TDZE 601
----------	----------	----------



CATEGORY	A	B	C	D
LPV DA	877-½ 276 (300-½)			
LNAV/VNAV DA	1083-1¼ 482 (500-1¼)			
LNAV MDA	1040-½ 439 (500-½)	1040-¾ 439 (500-¾)		1040-1 439 (500-1)
CIRCLING	1160-1 554 (600-1)	1320-2 714 (800-2)	1420-2¾ 814 (900-2¾)	

HIRL Rwy 10-28   
 REIL Rwy 5, 23 and 28   
 MRL Rwy 5-23 