

| | | | |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|
| WAAS CH 93506 W05A | APP CRS 061° | Rwy Idg TDZE Apt Elev | 8002 3952 3967 |
|----------------------------------------|------------------------|-----------------------------|-------------------------------------------|

RNAV (GPS) RWY 5



WESTERN NEBRASKA RGNL/WM B HEILIG FLD/SCOTTSBLUFF (BTF)

RNP APCH.


⚠ Baro-VNAV NA when using Alliance altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C (-7°F) or above 51°C (124°F). When local altimeter setting not received, use Alliance altimeter setting and increase all DA 91 feet and all MDA 100 feet; increase LPV all Cats visibility 3/8 mile, LNAV/VNAV all Cats visibility 1/4 mile, LNAV Cats C/D visibility 1/4 mile, Circling Cat C visibility 1/2 mile and Cat D visibility 1/4 mile.

MISSED APPROACH: Climb to 4400 then climbing right turn to 6900 direct BFF VORTAC and hold, continue climb-in-hold to 6900.

| | | |
|------------------------|--------------------------------------|---------------------------------|
| ASOS 121.025 | DENVER CENTER 127.95 338.2 | UNICOM 123.0 (CTAF) 0 |
|------------------------|--------------------------------------|---------------------------------|

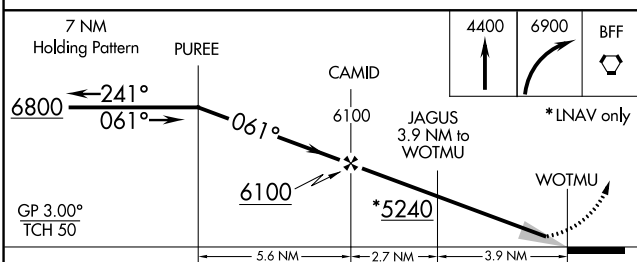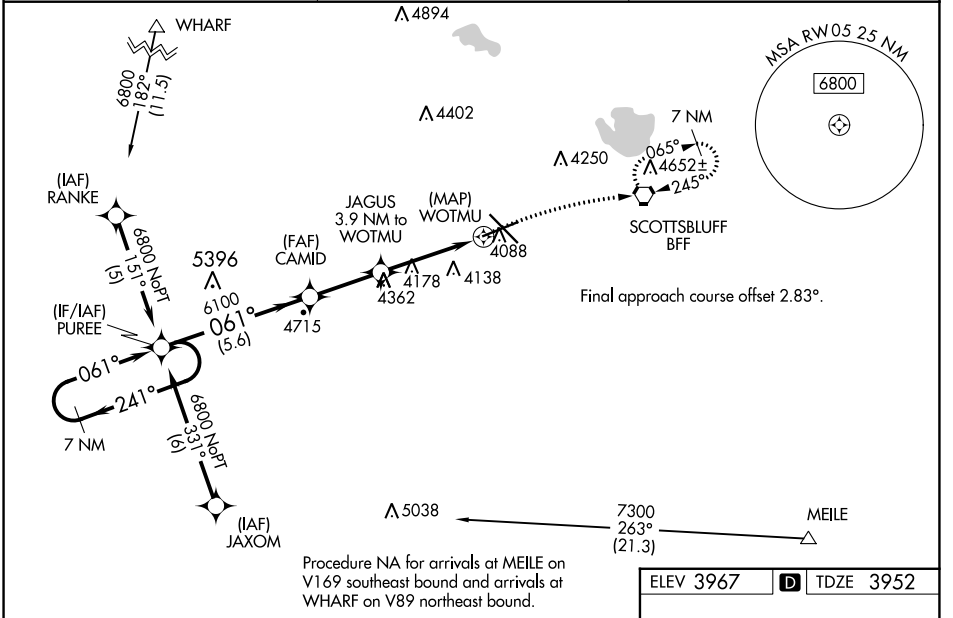

| | |
|-----------|--------------------|
| ELEV 3967 | D TDZE 3952 |
|-----------|--------------------|

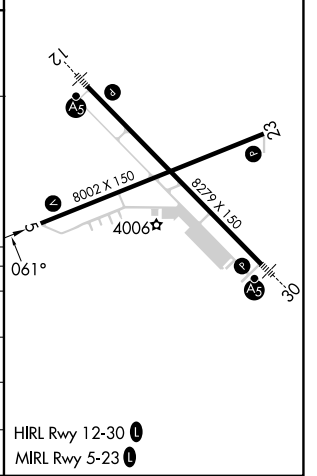

| CATEGORY | A | B | C | D |
|-------------------|--------|-------------|-------------------------|-------------------------|
| LPV DA | | 4202-1 | 250 (300-1) | |
| LNAV/VNAV DA | | 4418-1½ | 466 (500-1½) | |
| LNAV MDA | 4480-1 | 528 (600-1) | 4480-1½ | 528 (600-1½) |
| C CIRCLING | 4500-1 | 533 (600-1) | 4560-1½ 593 (600-1½) | 4720-2½ 753 (800-2½) |

RNAV (GPS) RWY 5

NC-2, 13 JUN 2024 to 11 JUL 2024

NC-2, 13 JUN 2024 to 11 JUL 2024