RNAV (RNP) Z RWY 1R

WASHINGTON DULLES INTL (IAD)

APP CRS	Rwy ldg	11500
011°	TDZE	312
	Apt Elev	312

RNP AR APCH - GPS.

For uncompensated Baro-VNAV systems, procedure NA below -13°C or above 54°C. For inop ALS, increase RNP 0.11 all Cats visibility to RVR 4500. Simultaneous approach authorized.

ALSF-2

MISSED APPROACH: Climb to 800 then climbing right turn to 3000 direct JCOBY and hold.

POTOMAC APP CON	DULLES TOWER	GND CON	CLNC DEL
120.45 306.925 (241°-330°) 128.525 306.925 (091°-240°) 126.1 338.25 (331°-090°)	120.1 317.8 (Rwy 1R/19L) 120.25 348.6 (Rwy 1C/19C) 134.425 348.6 (Rwys 1L/19R and 12/30)	121.9 317.8 (EAST) 121.625 348.6 (WEST)	135.7 317.8

D-ATIS 134.85

CPDLC

MISSED APCH FIX

4 NM 276° 096° JCOBY

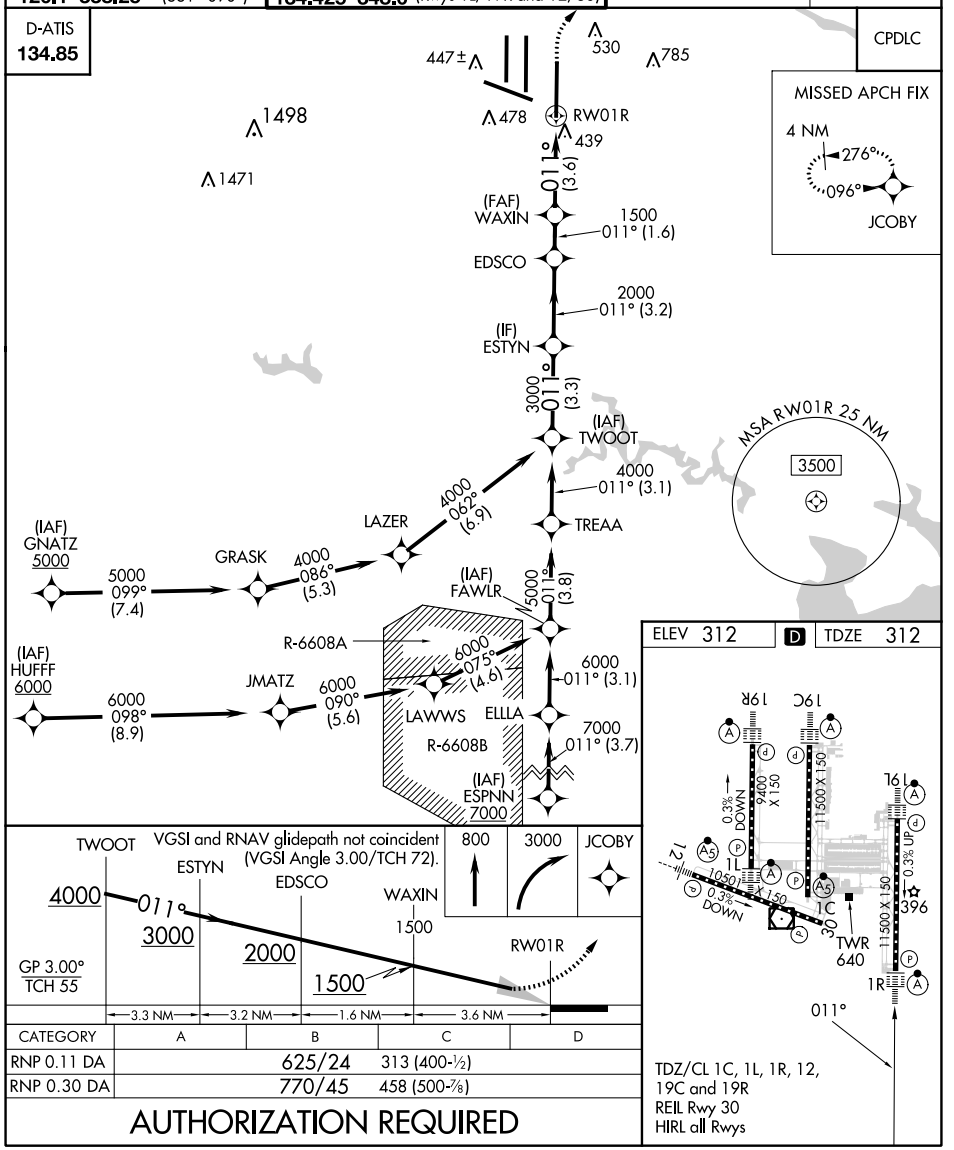

CATEGORY	A	B	C	D
RNP 0.11 DA		625/24	313 (400-½)	
RNP 0.30 DA		770/45	458 (500-⅞)	

AUTHORIZATION REQUIRED

NE-3, 13 JUN 2024 to 11 JUL 2024
NE-3, 13 JUN 2024 to 11 JUL 2024