

WAAS CH 48807 W04A	APP CRS 035°	Rwy Idg TDZE 24 Apt Elev 26	7193
--	------------------------	---	-------------


RNAV (GPS) RWY 4
PUNTA GORDA (PGD)

RNP APCH.


When local altimeter setting not received, use Page Fld altimeter setting and increase LPV DA to 274 feet, LNAV/VNAV DA to 443 feet, and all MDA 60 feet; increase LNAV/VNAV all Cats visibility $\frac{1}{8}$ SM, LNAV Cats C and D visibility $\frac{1}{4}$ SM, and Circling Cats C and D visibility $\frac{1}{4}$ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below 0°C or above 54°C. Baro-VNAV and VDP NA when using Page Fld altimeter setting.

MISSED APPROACH: Climb to 2000 direct DOGLE and track 087° to JOCKS and hold.

ATIS ★ 135.675	FORT MYERS APP CON ★ 127.05 306.2	PUNTA GORDA TOWER ★ 121.0 (CTAF) 0	GND CON 119.55	CLNC DEL 119.55	CLNC DEL 127.05 (When twr closed)	UNICOM 122.975
--------------------------	---	--	--------------------------	---------------------------	--	--------------------------

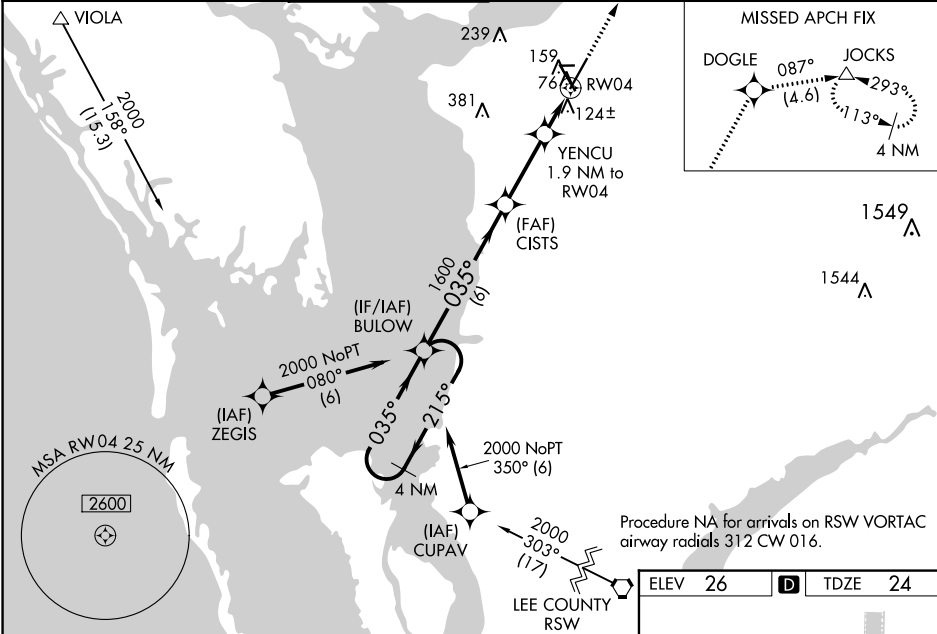

4 NM Holding Pattern 2000 ← 215° ← 035° → GP 3.00° TCH 50		BULOW		CISTS 1600 *680		2000 ↑ DOGLE 1.9 NM to RW04		JOCKS tr 087° △	
				035°		*LNAV only.			
		6 NM		2.9 NM		0.9 NM		1 NM	
CATEGORY		A	B	C	D				
LPV DA		224-¾ 200 (200-¾)							
LNAV/VNAV DA		393-1 369 (400-1)							
LNAV MDA		400-1 376 (400-1)							
CIRCLING		460-1 434 (500-1)	580-1 554 (600-1)	600-1½ 574 (600-1½)	740-2¼ 714 (800-2¼)				

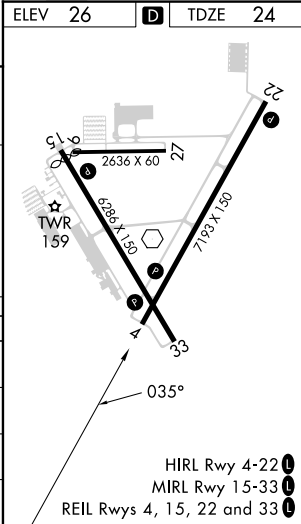

SE-3, 13 JUN 2024 to 11 JUL 2024

SE-3, 13 JUN 2024 to 11 JUL 2024