

WAAS

CH **93530**

W04A

APP CRS

040°

Rwy Idg

3600

TDZE

1168

Apt Elev

1171

RNAV (GPS) RWY 4

IOWA COUNTY (MRJ)

RNP APCH - GPS.


▽

⚠

Baro-VNAV and VDP NA when using Platteville altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 54°C. When local altimeter setting not received, use Platteville altimeter setting and increase LPV DA to 1473 feet, increase LNAV/VNAV DA to 1498 feet, increase all MDAs 60 feet, and LNAV visibility Cat C ¼ SM.

MISSED APPROACH:
Climb to 3600 direct ZOBIK and hold.

AWOS-3 118.525	CHICAGO CENTER 133.95 281.4	UNICOM 122.8 (CTAF) 0
--------------------------	---------------------------------------	---------------------------------

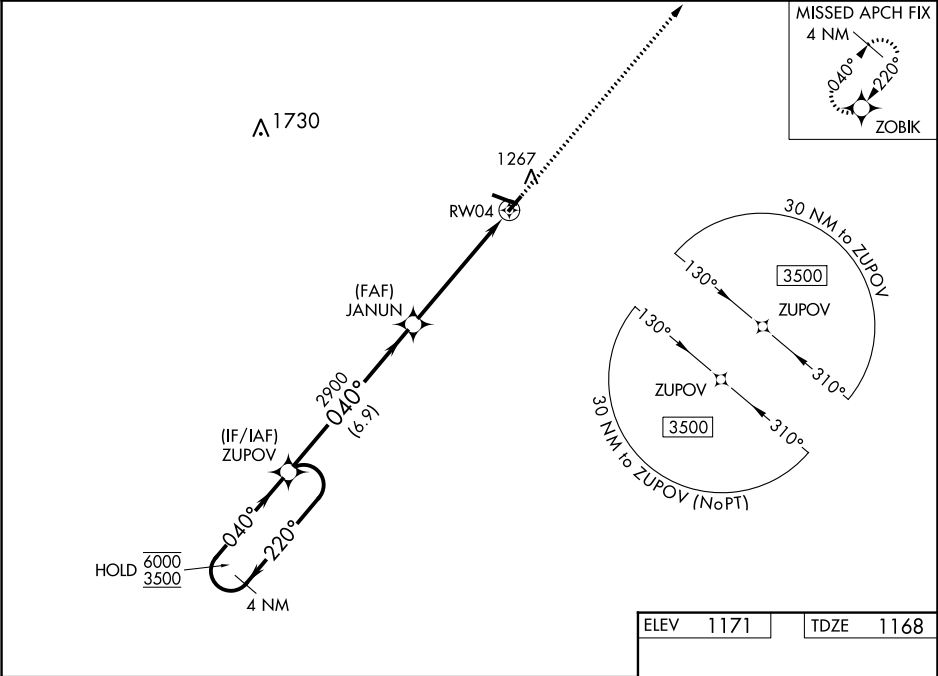

4 NM Holding Pattern

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 31).

3600 ZOBIK

GP 3.00° TCH 40

6000 3500

220° 040°

040°

2900

6.9 NM

4.1 NM

1.2 NM to RWY04

CATEGORY	A	B	C	D
LPV DA	1418-1	250 (300-1)		NA
LNAV/VNAV DA	1443-1	275 (300-1)		NA
LNAV MDA	1580-1	412 (500-1)	1580-1½ 412 (500-1½)	NA
CIRCLING	1620-1 449 (500-1)	1640-1 469 (500-1)	1640-1½ 469 (500-1½)	NA

ELEV 1171

TDZE 1168

REIL Rwy 11 and 29

MIRL Rwy 4-22 and 11-29