

LOC/DME I-SNU 110.3 Chan 40	APP CRS 170°	Rwy Idg 10000 TDZE 485 Apt Elev 501
---	------------------------	--

ILS or LOC RWY 17R




LOUISVILLE MUHAMMAD ALI INTL (SDF)

RADAR required for procedure entry at CWAYN.
DME or RADAR required.

Simultaneous approach authorized. Circling Rwy 11 NA at night.
For Inop ALS, increase S-LOC 17R Cat C/D visibility to RVR 6000.

MALSRL
MISSED APPROACH: Climb to 1600 then climbing right turn to 4000 on heading 275° and on IIL VORTAC R-279 to DAMEN INT/24.5 DME and hold.

D-ATIS 118.725	LOUISVILLE APP CON 132.075 327.0	LOUISVILLE TOWER 124.2 257.8	GND CON 121.7 348.6	CLNC DEL 126.1 275.8	CPDLC
--------------------------	--	--	-------------------------------	--------------------------------	-------

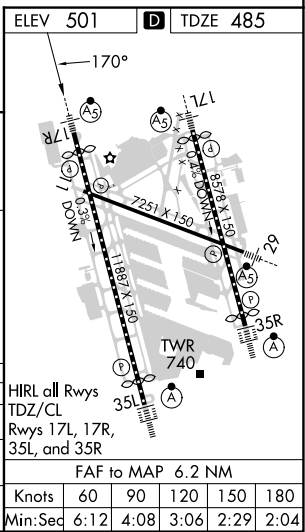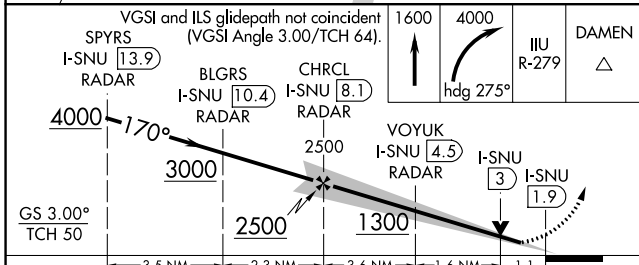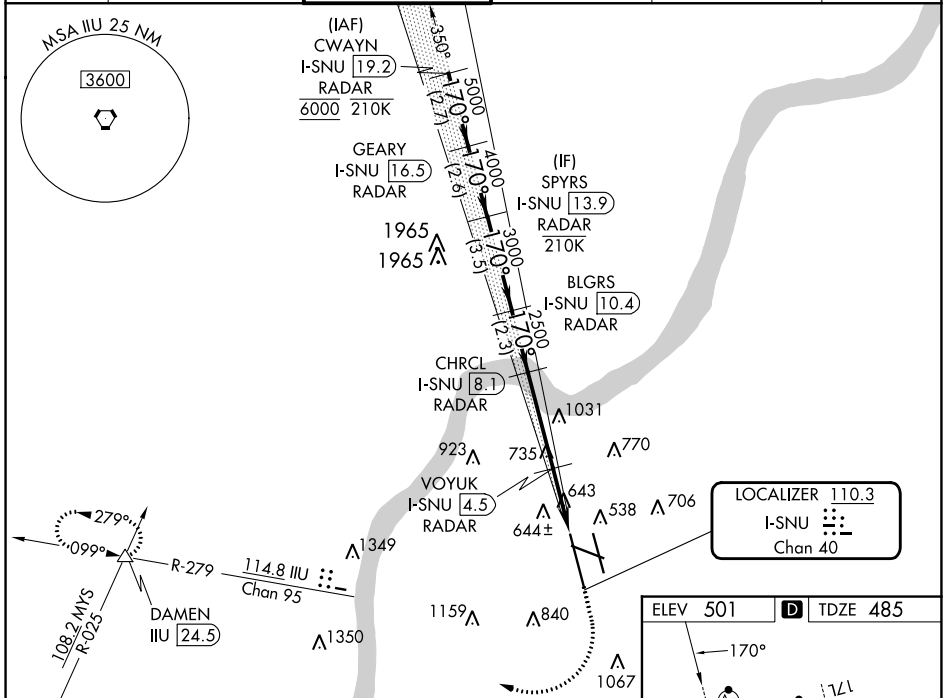

CATEGORY	A	B	C	D
S-ILS 17R		685/18	200 (200-½)	
S-LOC 17R	900/24	415 (400-½)	900/40	415 (400-¾)
CIRCLING	1040-1 539 (600-1)	1140-1 639 (700-1)	1160-1¾ 659 (700-1¾)	1400-3 899 (900-3)

SE-1, 08 AUG 2024 to 05 SEP 2024

SE-1, 08 AUG 2024 to 05 SEP 2024