RNAV (GPS) RWY 12

MC COOK BEN NELSON RGNL (MCK)

WAAS	APP CRS	Rwy Idg	5698
CH 50118	123°	TDZE	2583
W12A		Apt Elev	2583

RNP APCH-GPS.

Circling NA to Rwys 17 and 35. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -20°C or above 54°C. Baro-VNAV and VDP NA when using Imperial Muni altimeter setting. For inoperative MALSR, increase LPV all Cats visibility to 1, when using Imperial Muni altimeter setting increase LPV all Cats visibility to 1¾ and LNAV visibility Cat A to 1. Inoperative table does not apply to LNAV/VNAV. When local altimeter setting not received, use Imperial Muni altimeter setting and increase all DAs 213 feet, and LPV all Cats visibility ¾ mile, LNAV/VNAV Cat C visibility ½ mile; increase all MDAs 220 feet, and LNAV and Circling visibility Cats A and B ¼ mile, Cat C 1 mile.

MALSR

MISSED APPROACH: Climb to 5000 direct OPUXE and hold.

ASOS	DENVER CENTER	UNICOM
119.025	132.7 226.675	122.8 (CTAF) L

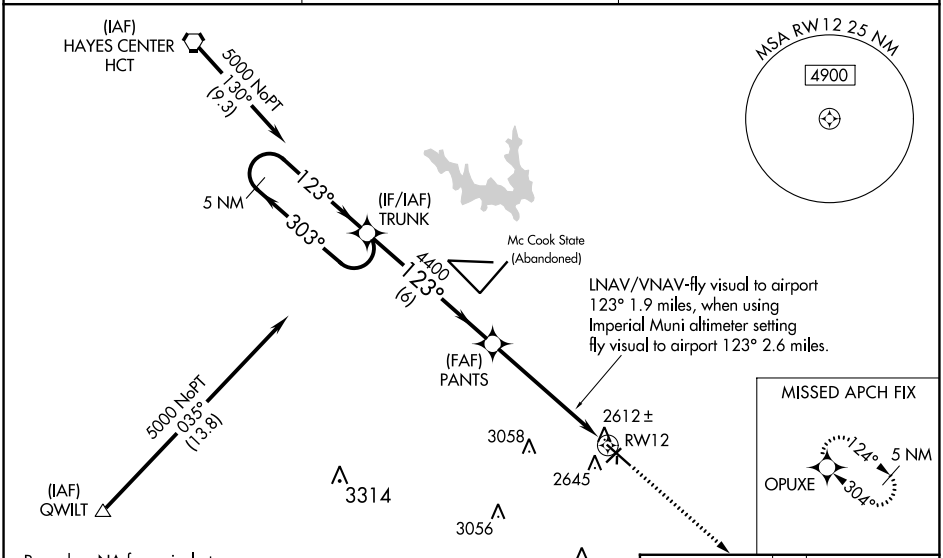

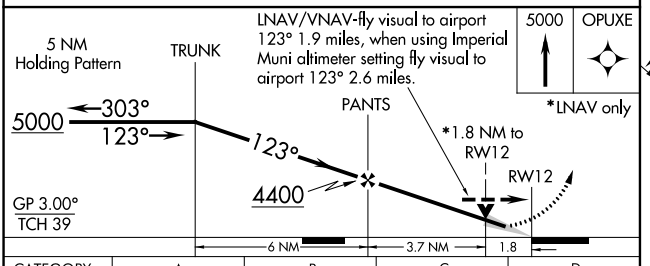

CATEGORY	A	B	C	D
LPV DA	2840-½ 257 (300-½)			NA
LNAV/VNAV DA	3240-2 657 (700-2)			NA
LNAV MDA	3180-½ 597 (600-½)		3180-1 597 (600-1)	NA
CIRCLING	3180-1 597 (600-1)		3360-2¼ 777 (800-2¼)	NA



NC-2, 08 AUG 2024 to 05 SEP 2024
NC-2, 08 AUG 2024 to 05 SEP 2024