

LOC I-AIW 108.9	APP CRS 309°	Rwy Idg 9002
		TDZE 733
		Apt Elev 777


ILS or LOC RWY 31

ARDMORE MUNI (ADM)

Autopilot coupled approach NA below 1360. Inop table does not apply to S-ILS 31 all Cats, S-LOC 31 Cats A and B, and UMEHU fix minimums S-LOC 31 Cats A and B. For inop ALS, increase UMEHU fix minimums S-LOC 31 Cats C and D visibility to 1 SM.

MALSRS
MISSED APPROACH: Climb to 2000 then climbing left turn to 3000 direct ADM VORTAC and hold.



ATIS 125.6	FORT WORTH CENTER 124.75 323.0	ARDMORE TOWER ★ 118.5 (CTAF) 257.7	GND CON 121.8	UNICOM 122.95
----------------------	--	--	-------------------------	-------------------------

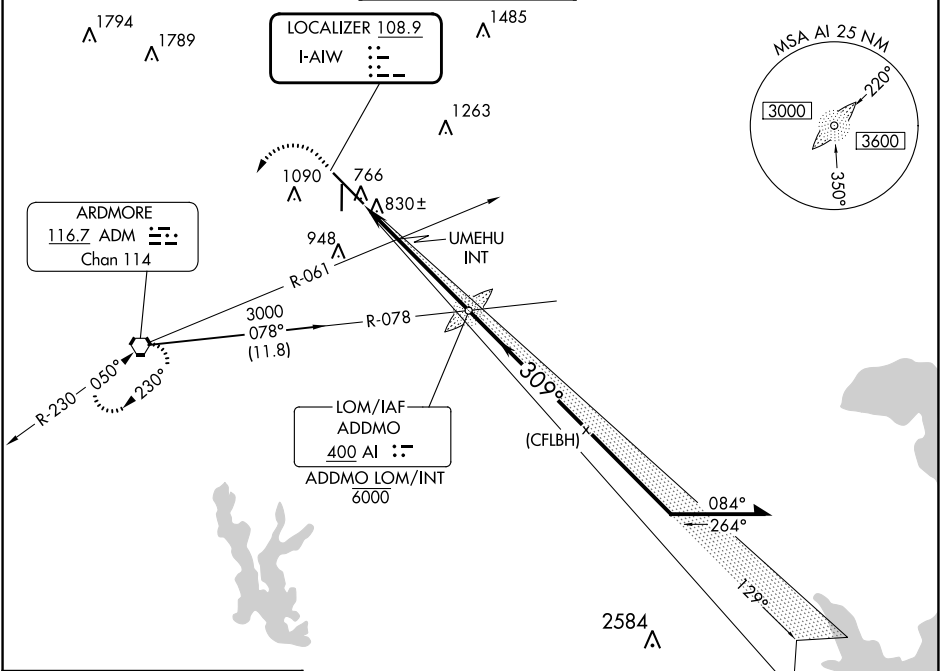

SC-1, 05 SEP 2024 to 03 OCT 2024

SC-1, 05 SEP 2024 to 03 OCT 2024

ELEV 777 **D** TDZE 733

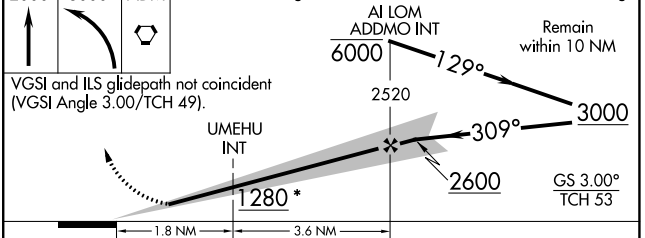

CATEGORY	A	B	C	D
S-ILS 31	936-1/2 203 (200-1/2)			
S-LOC 31*	1280-1/2	547 (600-1/2)	1280-1 1/8	547 (600-1 1/8)
CIRCLING	1300-1 523 (600-1)	1440-1 663 (700-1)	1500-2 723 (800-2)	1700-3 923 (1000-3)
UMEHU FIX MINIMUMS (DUAL RECEIVERS REQUIRED)				
S-LOC 31	1080-1/2	347 (400-1/2)	1080-5/8	347 (400-5/8)
CIRCLING	1300-1 523 (600-1)	1440-1 663 (700-1)	1500-2 723 (800-2)	1700-3 923 (1000-3)

FAF to MAP 5.4 NM					
Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48