

LOC/DME I-MVY	APP CRS	Rwy Idg	5504
108.7	236°	TDZE	63
Chan 24		Apt Elev	67

ILS or LOC RWY 24

MARTHA'S VINEYARD (MVY)

▼ VDP NA with Hyannis altimeter setting. When local altimeter setting not received, use Hyannis altimeter setting and increase all DA to 317 feet and all MDA 60 feet; increase S-LOC Cats C and D visibility to RVR 5000, Circling Cat C and D visibility ¼ SM.

▲ For inoperative MALS R when using Hyannis altimeter setting, increase S-LOC Cats C and D visibility to 1¾ mile. Circling Rwy 15 NA at night. ** RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using Hyannis altimeter setting).


MALS R



MISSED APPROACH:

Climb to 800 then
climbing left turn to 2500
on MVY VOR/DME R-180
to CLAMY INT/ACK 23.9
DME and hold.

ATIS	BOSTON APP CON	VINEYARD TOWER *	GND CON	CLNC DEL	CLNC DEL	UNICOM
126.25	133.75	121.4 (CTAF) 0	124.35	124.35	119.7 (When twr closed)	122.95

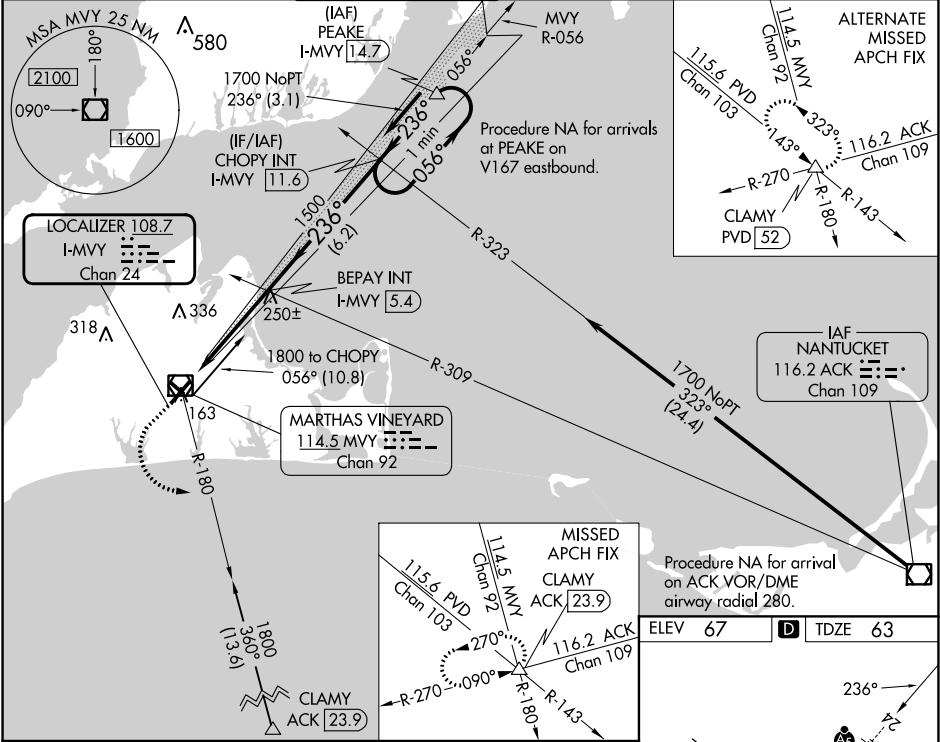

800

2500

CLAMY

↑

MVY

R-180

△

Use I-MVY DME when on the localizer course.

BEPAY INT

I-MVY

5.4

CHOPY INT

I-MVY

11.6

One Minute Holding Pattern

* LOC only

I-MVY

1

* I-MVY

2.3

1500

236°

056°

1700

236°

GS 3.00°

TCH 51

1.2 NM

3.2 NM

6.2 NM

CATEGORY	A	B	C	D
S-ILS 24 **	263/24 200 (200-½)			
S-LOC 24	500/24 437 (500-½)		500/40 437 (500-¾)	
CIRCLING	500-1 433 (500-1)	540-1 473 (500-1)	700-1¾ 633 (700-1¾)	780-2¼ 713 (800-2¼)

51

3322 X 75

0.3% Up

5504 X 100

33

TWR 128

HIRL Rwy 6-24

MIRL Rwy 15-33

REIL Rwy 6

REIL Rwy 33

FAF to MAP 4.4 NM

Knots	60	90	120	150	180
Min:Sec	4:24	2:56	2:12	1:46	1:28

NE-1, 05 SEP 2024 to 03 OCT 2024

NE-1, 05 SEP 2024 to 03 OCT 2024