


WAAS CH 61133 W18A	APP CRS 179°	Rwy Idg 5500 TDZE 883 Apt Elev 910
--	------------------------	---

RNAV (GPS) RWY 18
SEDALIA RGNL (DMO)

⚠ DME/DME RNP-0.3 NA. When local altimeter setting not received, use Whiteman AFB altimeter setting: increase all DA 46 feet and LNAV/VNAV visibility 1/8 mile; increase all MDA 60 feet and Cats C and D visibilities 1/4 mile. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C (3°F) or above 54°C (130°F). Baro-VNAV and VDP NA when using Whiteman AFB altimeter setting. Night Landing Rwy 5, 23 NA.

MISSED APPROACH:
Climb to 2600 direct ZANGA and hold.

ASOS 120.525	WHITEMAN APP CON* 127.45 284.0	UNICOM 122.8 (CTAF) 0
------------------------	--	---------------------------------

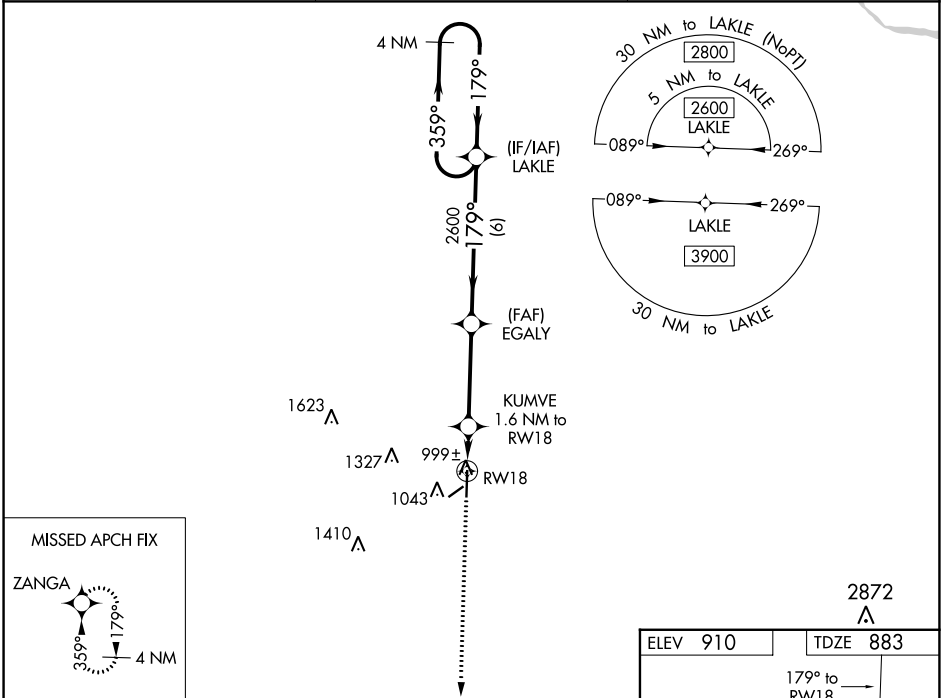

2600 ZANGA		KUMVE 1.6 NM to RW18		EGALY 2600	LAKLE	4 NM Holding Pattern
*LNAV only		*1 NM to RW18		179°	359°	2600
RW18		*1420		2600	GP 3.00°	TCH 37
1 NM		0.6		3.7 NM	6 NM	
CATEGORY	A	B	C	D		
LPV DA	1133-1		250 (300-1)			
LNAV/VNAV DA	1155-1		272 (300-1)			
LNAV MDA	1260-1		377 (400-1)			
CIRCLING	1360-1 450 (500-1)	1460-1 550 (600-1)	1640-2 730 (800-2)	1640-2 1/4 730 (800-2 1/4)		

