WAAS	APP CRS	Rwy Idg	5000
CH 40021	009°	TDZE	1059
W01A		Apt Elev	1077

RNAV (GPS) RWY 1

RUTHERFORD COUNTY/MARCHMAN FLD (FQD)

T A Baro-VNAV NA when using Shelby-Cleveland County Rgnl altimeter setting. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below-17°C (2°F) or above 54°C (130°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Shelby-Cleveland County Rgnl altimeter setting and increase all DA 77 feet, all MDA 80 feet, and increase LPV all Cats, LNAV/VNAV all Cats, LNAV Cats C/D and Circling Cats C/D visibility ¼ mile. VDP NA with Shelby-Cleveland County Rgnl altimeter setting.

MISSED APPROACH: Climb to 1700 then climbing left turn to 3000 direct EPOZI and hold.

AWOS-3	GREER APP CON ★	UNICOM
118.275	119.4 350.2	122.8 (CTAF) L

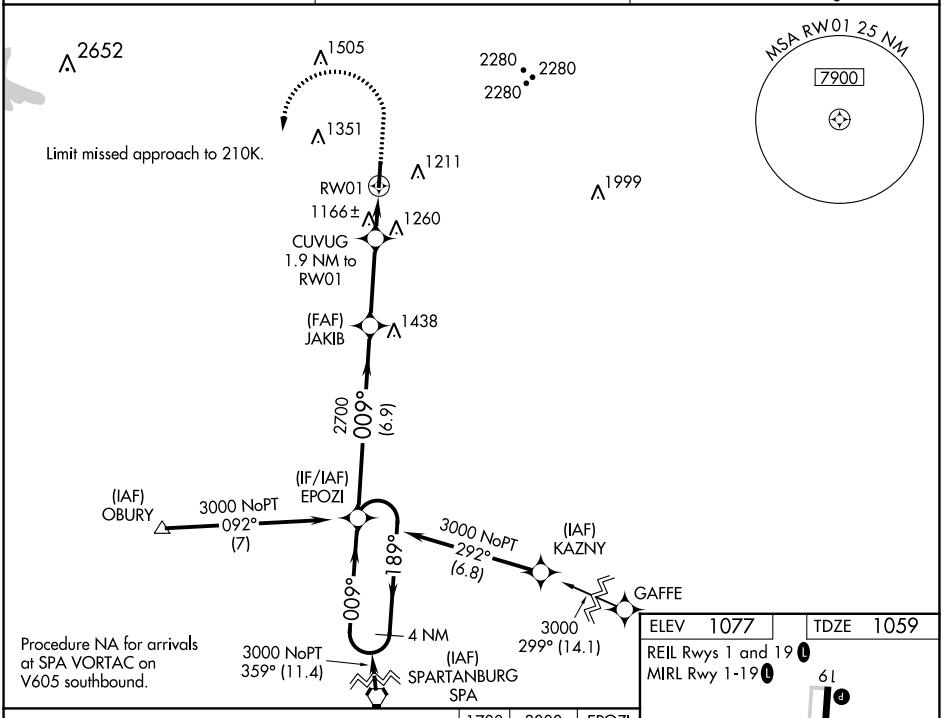

ELEV 1077	TDZE 1059
REIL Rwys 1 and 19 L	
MIRL Rwy 1-19 L	

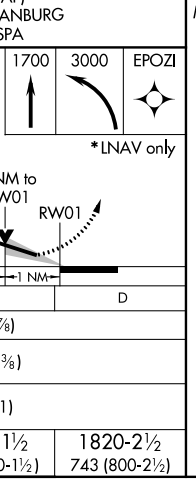

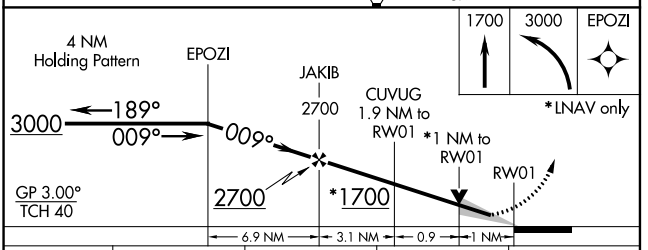

CATEGORY	A	B	C	D
LPV DA	1309-⅞	250 (300-⅞)		
LNAV/VNAV DA	1459-1⅜	400 (400-1⅜)		
LNAV MDA	1420-1	361 (400-1)		
C CIRCLING	1560-1 483 (500-1)	1620-1 543 (600-1)	1640-1½ 563 (600-1½)	1820-2½ 743 (800-2½)

SE-2, 05 SEP 2024 to 03 OCT 2024
SE-2, 05 SEP 2024 to 03 OCT 2024