

LOC/DME I-DCA 109.9 Chan 36	APP CRS 007°	Rwy Idg 6869 TDZE 14 Apt Elev 14
---	------------------------	---

ILS or LOC RWY 1
RONALD REAGAN WASHINGTON NTL (DCA)

DME required. RADAR required for procedure entry.


T Circling NA northeast of Rwy 15-33.
A For inop ALS, increase S-LOC 1 Cats C and D visibility to $1\frac{3}{8}$ SM.

ALSF-2



MISSED APPROACH: Climb to 420 then climbing left turn to 2200 on DCA VOR/DME R-325 to GTN NDB/INT/DCA 5.9 DME and hold.

D-ATIS 132.65	POTOMAC APP CON		WASHINGTON TOWER		GND CON	CLNC DEL	CPDLC
119.85	239.25	(WEST/SOUTH)	119.1	257.6	121.7	257.6	
124.2	360.8	(EAST)				128.25	

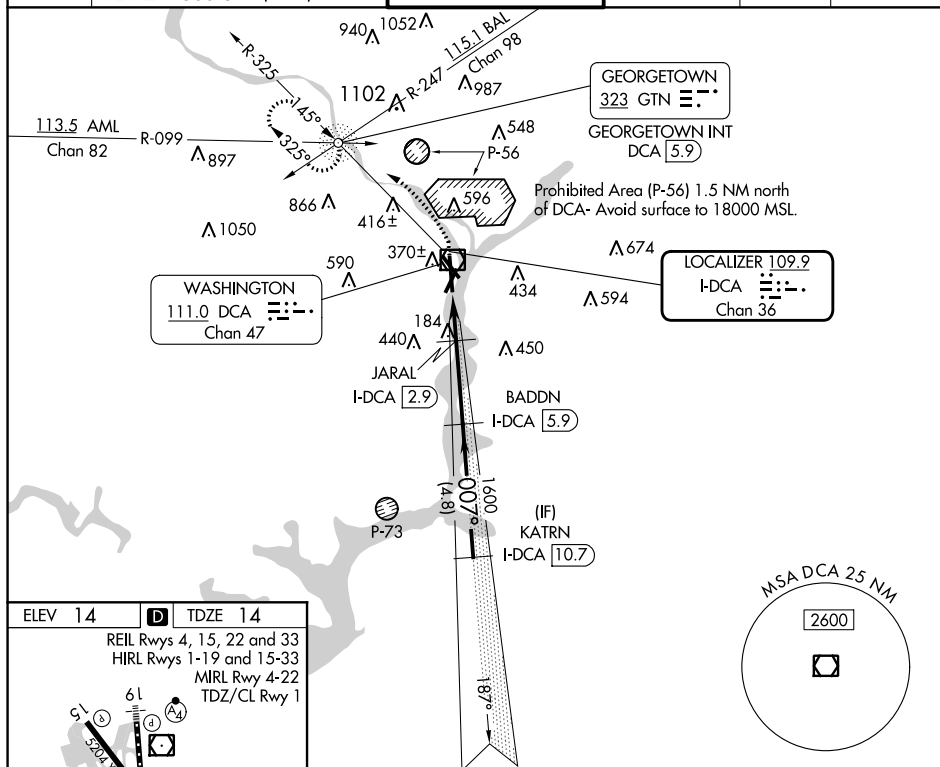

ELEV 14 TDZE 14

REIL Rwy 4, 15, 22 and 33
HIRL Rwy 1-19 and 15-33
MIRL Rwy 4-22
TDZ/CL Rwy 1

TWR 229

007°

FAF to MAP 4.8 NM

Knots	60	90	120	150	180
Min:Sec	4:48	3:12	2:24	1:55	1:36

420 ↑	2200 DCA R-325	GTN 	Use I-DCA DME when on the localizer course.			
CATEGORY	A	B	C	D		
S-ILS 1	214/18 200 (200-½)					
S-LOC 1	480/24	466 (500-½)	480/50	466 (500-1)		
CIRCLING	720-1 706 (800-1)	900-1¼ 886 (900-1¼)	900-2¾ 886 (900-2¾)	900-3 886 (900-3)		