

VORTAC INL 114.95 Chan 96(Y)	APP CRS 134°	Rwy Idg 7400 TDZE 1184 Apt Elev 1182
--	------------------------	---

VOR RWY 13

FALLS INTL/EINARSON FLD (INL)


⚠ Circling to Rwy 4-22 NA at night. VDP NA when using Baudette altimeter setting. When local altimeter setting not received, use Baudette altimeter setting and increase all MDAs 140 feet, and S-13 Cats A/B visibility ¼ mile, Cats C/D visibility ½ mile. Increase Circling Cat B visibility ¼ mile, Cat C and D ½ mile. For inop MALSR when using Baudette altimeter setting, increase S-13 Cat A visibility ¼ mile.

MALSR



MISSED APPROACH: Climb to 2900 then right turn direct INL VORTAC and hold.




ASOS 120.0	MINNEAPOLIS CENTER 120.9 377.1	UNICOM 122.8 (CTAF)
----------------------	--	-------------------------------

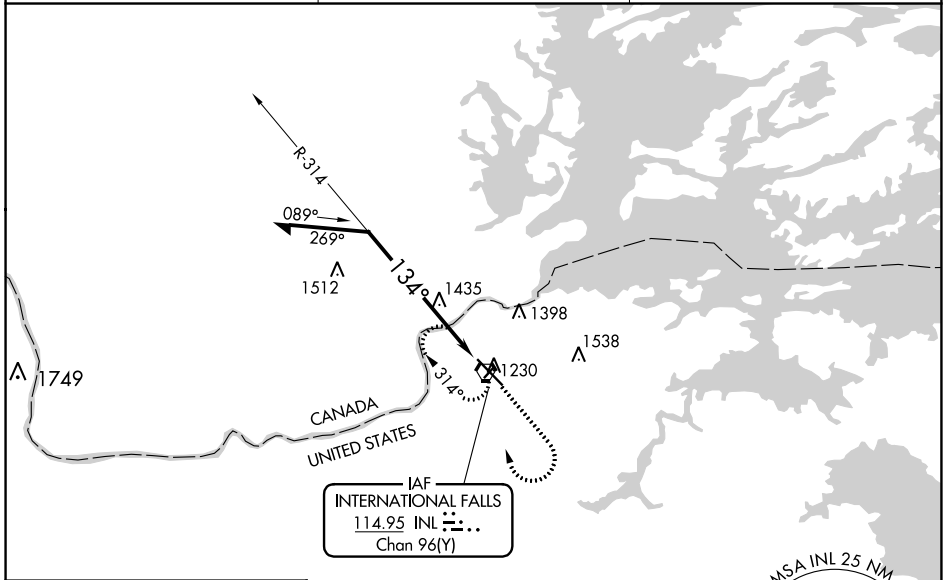

NC-1, 03 OCT 2024 to 31 OCT 2024

NC-1, 03 OCT 2024 to 31 OCT 2024

ELEV 1182	D	TDZE 1184
-----------	----------	-----------

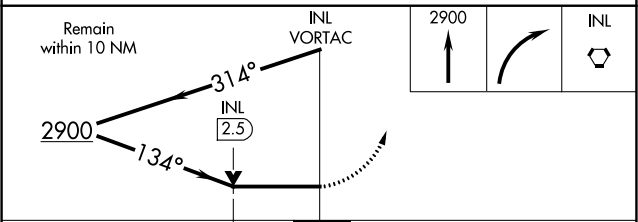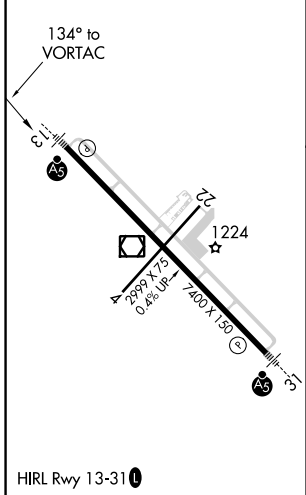

CATEGORY	A	B	C	D
S-13	1880-½ 696 (700-½)	1880-1½ 696 (700-1½)	1880-1¾ 696 (700-1¾)	1880-1¾ 696 (700-1¾)
CIRCLING	1880-1 698 (700-1)	1900-2 718 (800-2)	1900-2¼ 718 (800-2¼)	1900-2¼ 718 (800-2¼)