WAAS	APP CRS	Rwy Idg	9002
CH 40009	236°	TDZE	66
W24A		Apt Elev	66

RNAV (GPS) RWY 24

FRANCIS S GABRESKI (FOK)

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 43°C (109°F). DME/DME RNP-0.3 NA. When local altimeter setting not received, use Shirley altimeter setting: increase LPV DA to 293 feet; increase LNAV/VNAV DA to 632 feet and all Cats visibility ⅛ SM; increase all MDAs 40 feet and Circling Cat C visibility ¼ SM. Baro-VNAV and VDP NA when using Shirley altimeter setting. Circling Rwy 15 NA at night.

MALSR

MISSED APPROACH: Climb to 2600 direct ZATBO and hold.

ASOS	NEW YORK APP CON	SUFFOLK COUNTY TOWER ★	GND CON
119.925	125.975 343.65	125.3 (CTAF) L 236.6	121.8 225.4

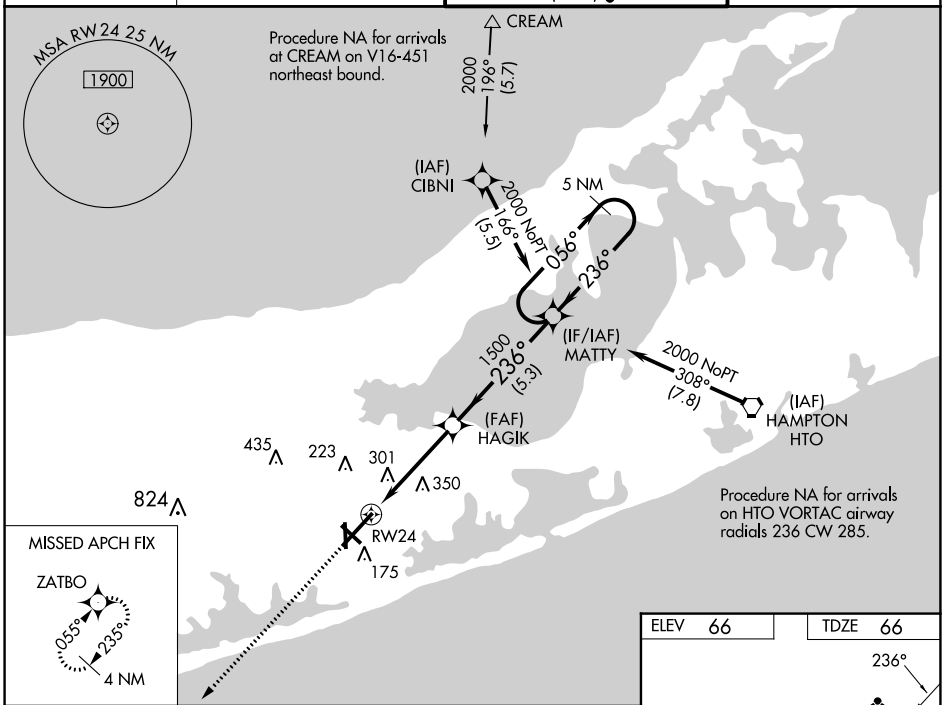

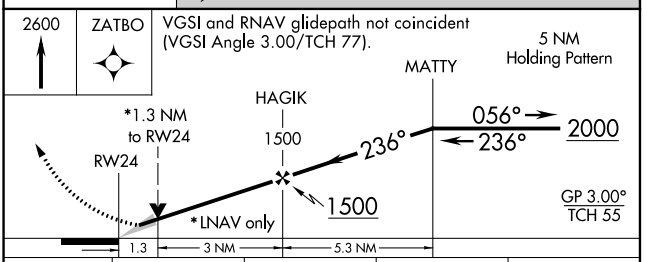

CATEGORY	A	B	C	D
LPV DA	266-½ 200 (200-½)			
LNAV/VNAV DA	605-1⅜ 539 (600-1⅜)			
LNAV MDA	560-½ 494 (500-½)		560-1 494 (500-1)	
CIRCLING	600-1 534 (600-1)	620-1 554 (600-1)	700-1¾ 634 (700-1¾)	740-2¼ 674 (700-2¼)

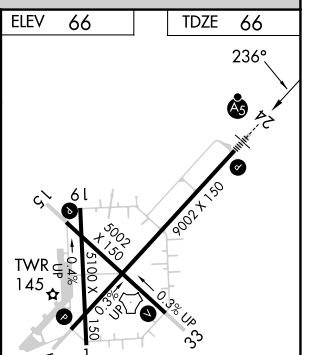

HIRL Rwy 6-24 L
MIRL Rwy 15-33 L
REIL Rwys 6, 15, and 33 L

NE-2, 31 OCT 2024 to 28 NOV 2024
NE-2, 31 OCT 2024 to 28 NOV 2024