

APP CRS	Rwy Idg	9290
283°	TDZE	31
	Apt Elev	31

RNAV (RNP) Z RWY 28R

PORTLAND INTL (PDX)

RNP AR APCH - GPS. Authorization required. From BYKES: RF

▼ For uncompensated Baro-VNAV systems, procedure NA below -5°C or above 54°C. Simultaneous approach authorized. For inop ALS increase RNP 0.10 all Cats visibility to RVR 4500, increase RNP 0.20 all Cats visibility to RVR 5500, and increase RNP 0.30 all Cats visibility to RVR 6000.

MALSR MISSED APPROACH: Climb to 600 then climbing right turn to 4400 direct BATYL and hold, continue climb-in-hold to 4400.



D-ATIS	PORTLAND APP CON	PORTLAND TOWER	GND CON	CLNC DEL	CPDLC
128.35 269.9	124.35 299.2	Rwy 10L-28R 118.7 257.8 Rwys 3-21, 10R-28L 123.775 251.125	121.9 348.6	120.125 318.1	



NW-1, 28 NOV 2024 to 26 DEC 2024

NW-1, 28 NOV 2024 to 26 DEC 2024

ELEV	31	D	TDZE	31
------	-----------	----------	------	-----------

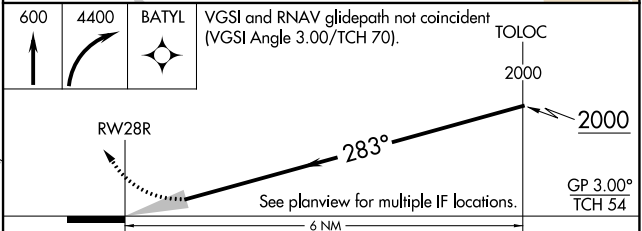

CATEGORY	A	B	C	D
RNP 0.10 DA		322/24	291 (300-½)	
RNP 0.20 DA		400/35	369 (400-¾)	
RNP 0.30 DA		451/40	420 (500-¾)	

AUTHORIZATION REQUIRED