RNAV (GPS) RWY 2

FARMINGTON RGNL (FAM)

WAAS	APP CRS	Rwy Idg	4323
CH 61019	026°	TDZE	926
W02A		Apt Elev	946

RNP APCH - GPS.

For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -16°C or above 54°C. Rwy 2 helicopter visibility reduction below ¾ SM NA. Circling Rwy 20 NA at night. Baro-VNAV and VDP NA when using Sparta altimeter setting. When local altimeter setting not received, use Sparta altimeter setting and increase LPV DA to 1330 feet and all visibilities ⅜ SM. Increase LNAV/VNAV DA to 1525 feet and all visibilities ⅜ SM. Increase all MDAs 160 feet and LNAV and Circling Cat B visibility ¼ SM.

MISSED APPROACH: Climb to 3100 direct ZODUX and hold.

AWOS-3PT	KANSAS CITY CENTER	UNICOM
119.275	127.475 346.275	122.8 (CTAF) L

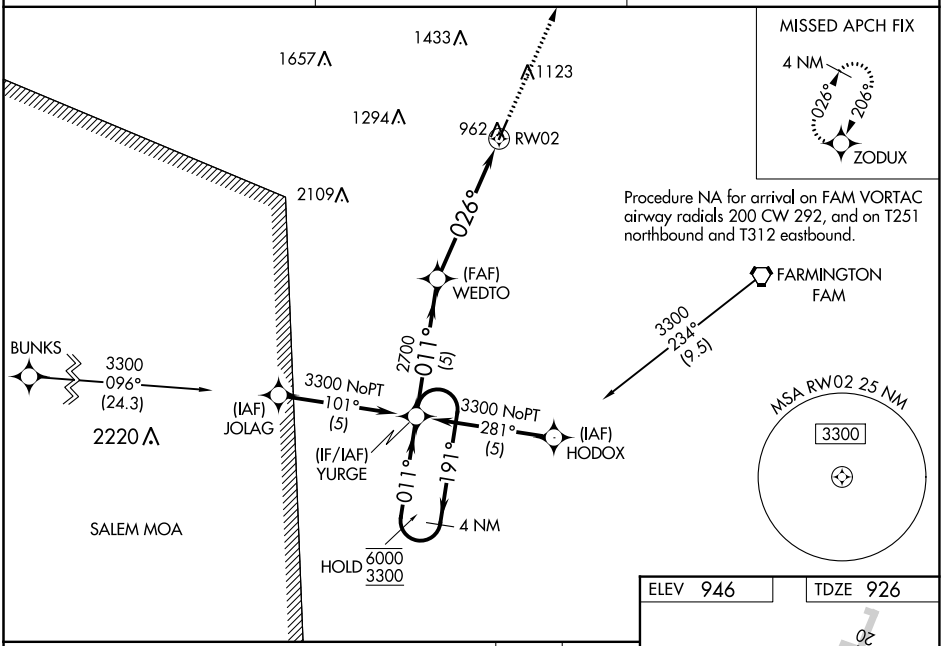

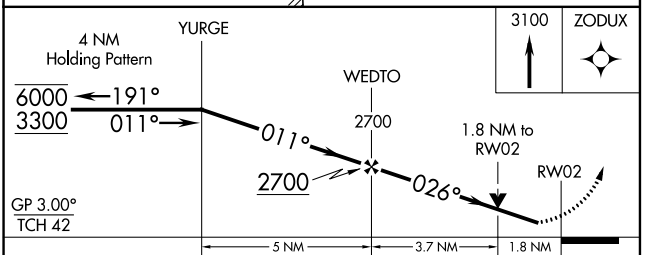

CATEGORY	A	B	C	D
LPV DA	1176-1	250 (300-1)	NA	
LNAV/VNAV DA	1371-1⅜	445 (500-1⅜)	NA	
LNAV MDA	1540-1	614 (600-1)	NA	
C CIRCLING	1540-1	594 (600-1)	NA	

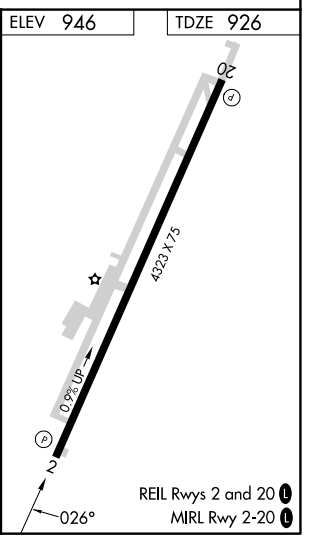

NC-3, 28 NOV 2024 to 26 DEC 2024
NC-3, 28 NOV 2024 to 26 DEC 2024