RNAV (GPS) RWY 15

SCAPPOOSE (SPB)

WAAS CH 65720 W15A	APP CRS 152°	Rwy ldg 5100 TDZE 58 Apt Elev 58

RNP APCH-GPS.

Circling NA west of Rwy 15-33. Rwy 15 helicopter visibility reduction below 1 SM NA. When VGSI inop, Straight-in and Circling to Rwy 15 NA at night. When local altimeter setting not received, use Portland Intl altimeter setting; increase all DA/MDA 40 feet and increase LNAV/VNAV all Cats visibility ⅛ SM, Circling Cat D visibility ¼ SM. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -15°C (5°F) or above 42°C (107°F).

MISSED APPROACH: Climb to 700 then climbing left turn to 3600 direct IMJUS and hold.

ASOS	PORTLAND APP CON	CLNC DEL	UNICOM
135.875	124.35 299.2	121.65	122.8 (CTAF) L

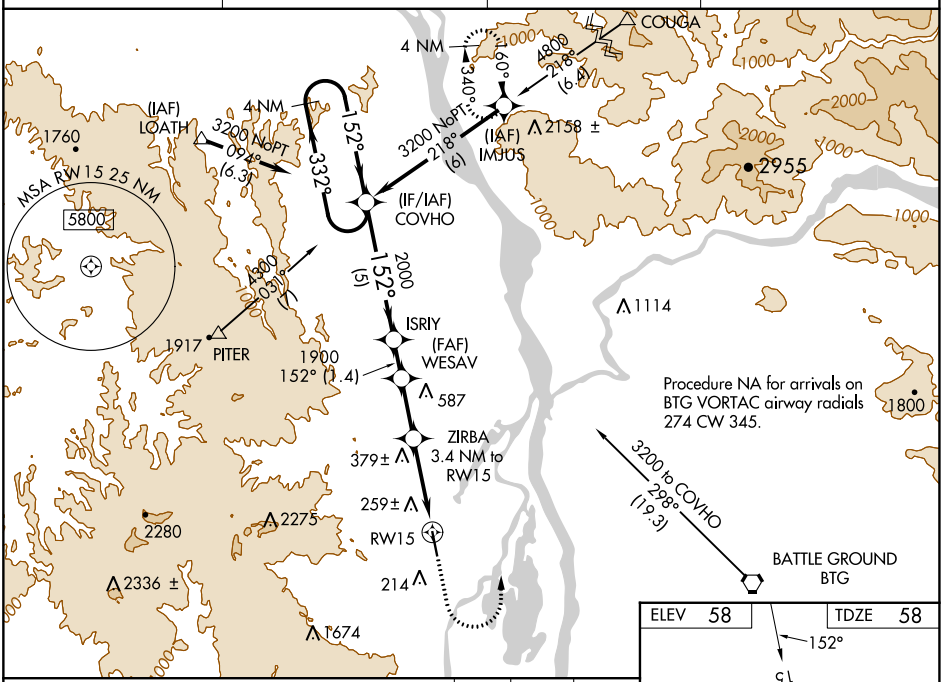

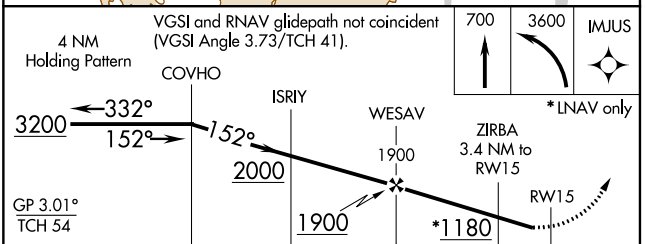

CATEGORY	A	B	C	D
LPV DA	350-1 292 (300-1)			
LNAV/VNAV DA	580-1¾ 522 (600-1¾)			
LNAV MDA	640-1 582 (600-1)		640-1¾ 582 (600-1¾)	
CIRCLING	660-1 602 (700-1)		660-1¾ 602 (700-1¾)	860-2½ 802 (900-2½)

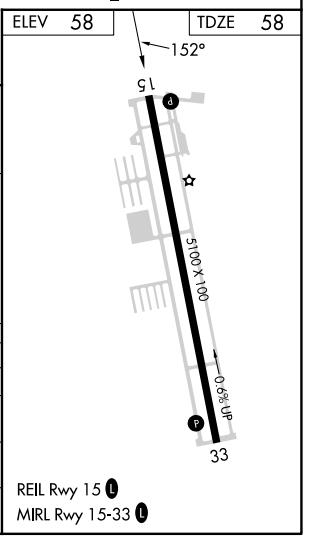

NW-1, 28 NOV 2024 to 26 DEC 2024
NW-1, 28 NOV 2024 to 26 DEC 2024