WAAS	APP CRS	Rwy Idg	12000
CH 87128	082°	TDZE	5352
W07A		Apt Elev	5434

RNAV (GPS) Y RWY 7

DENVER INTL (DEN)

RNP APCH - GPS.

T Simultaneous approach authorized. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -22°C or above 54°C. LNAV procedure NA during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500, and LNAV Cat C/D visibility to RVR 5500. Use of FD or AP required during simultaneous operations.

MALSR

MISSED APPROACH: Climb to 5900 then climbing right turn to 10000 direct CIDMU and on track 081° to LIMEX and hold.

D-ATIS	DENVER APP CON	DENVER TOWER	GND CON	CLNC DEL	CPDLC
125.6 379.9 (ARR) 134.025 (DEP)	119.3 307.3 (N) 120.35 379.3 (S)	128.75 273.55	121.35 379.175 (W) 121.85 377.1 (E)	118.75	

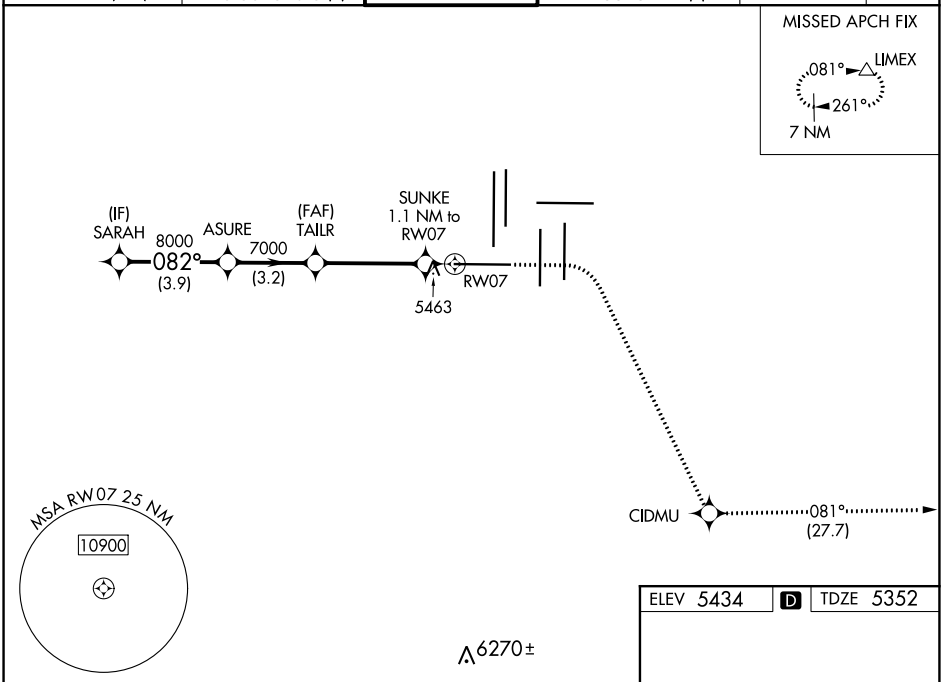

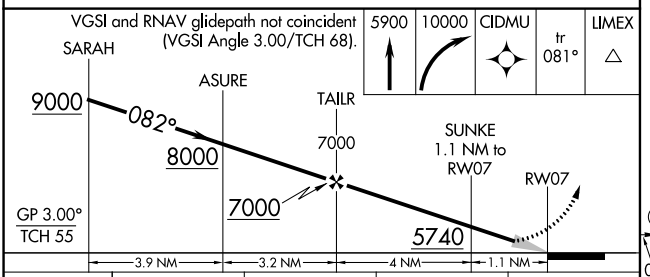

CATEGORY	A	B	C	D
LPV DA	5552/18 200 (200-½)			
LNAV/VNAV DA	5626/24 274 (200-½)			
LNAV MDA	5720/24 368 (300-½)		5720/35 368 (300-⅝)	

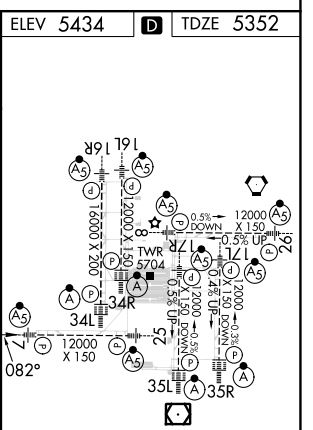

HIRL all Rwys
TDZ/CL Rwys 7, 16L, 16R, 17R, 26, 34L, 34R, 35L, 35R

SW-1, 28 NOV 2024 to 26 DEC 2024
SW-1, 28 NOV 2024 to 26 DEC 2024