

WAAS CH 78434 W12A	APP CRS 121°	Rwy Idg TDZE Apt Elev	3998 2209 2209
--	------------------------	-----------------------------	---




RNAV (GPS) RWY 12

PHILIP (PHP)

⚠ DME/DME RNP-0.3 NA. When local altimeter setting not received, use Pierre altimeter setting and increase all DA 204 feet and MDA 220 feet and increase LPV and LNAV/VNAV all Cats visibility 3/8 mile, increase LNAV Cat C visibility 1/2 mile, and increase Circling Cat C visibility 3/4 mile. Helicopter visibility reduction below 1 SM NA. Procedure NA at night. For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -14°C (7°F) or above 54°C (130°F). Baro-VNAV NA when using Pierre altimeter setting.

MISSED APPROACH: Climb to 4500 direct UTMZY and hold.

ASOS 118.375	DENVER CENTER 127.95 338.2	UNICOM 122.8 (CTAF)
------------------------	--------------------------------------	-------------------------------

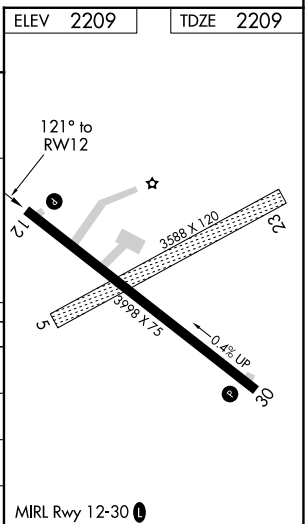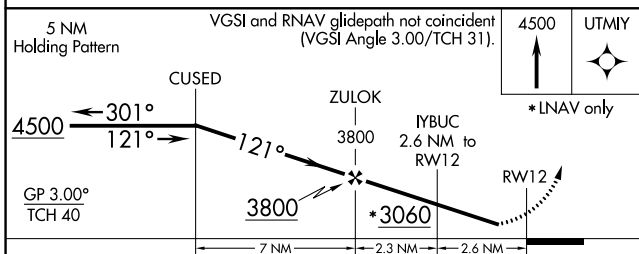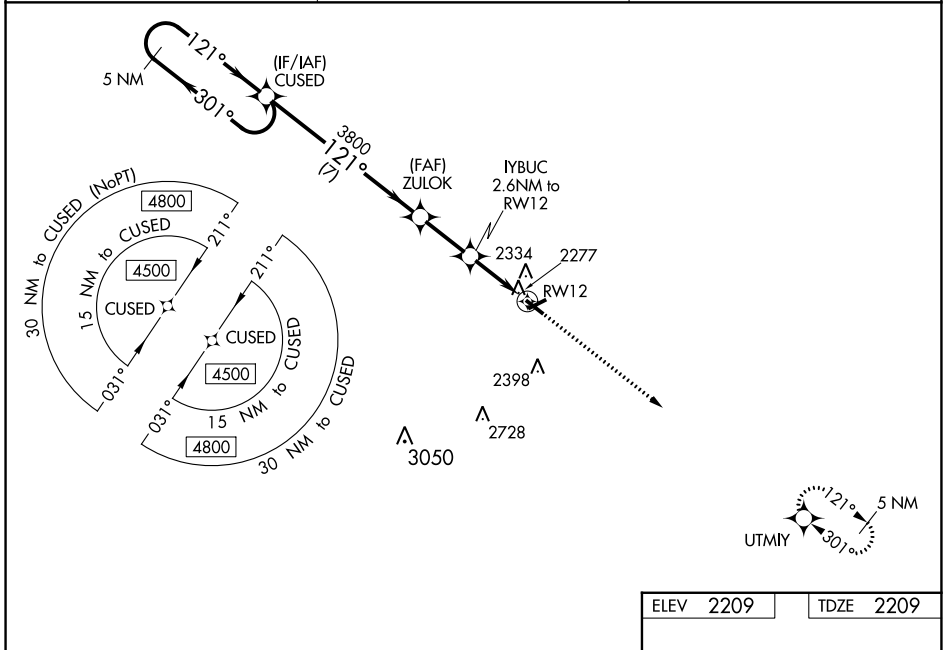

CATEGORY	A	B	C	D
LPV DA	2467-1	258 (300-1)		NA
LNAV/VNAV DA	2742-1 7/8	533 (600-1 7/8)		NA
LNAV MDA	2680-1	471 (500-1)	2680-1 3/8 471 (500-1 3/8)	NA
C CIRCLING	2720-1 511 (600-1)	2760-1 551 (600-1)	2840-1 3/4 631 (700-1 3/4)	NA