


APP CRS	Rwy Idg	7701
137°	TDZE	27
	Apt Elev	29




RNAV (RNP) Y RWY 14

JACKSONVILLE INTL (JAX)


For uncompensated Baro-VNAV systems, procedure NA below -5°C (23°F) or above 54°C (130°F). GPS required. For inoperative MALSR, increase RNP 0.30 all Cats

MALSR  MISSED APPROACH: Climb to 500 then climbing left turn to 2000 direct YEJWO and hold.

D-ATIS	JACKSONVILLE APP CON	JACKSONVILLE TOWER	GND CON	CLNC DEL	CPDLC
125.85	119.0 269.9	118.3 317.7	121.9 348.6	119.5 290.275	

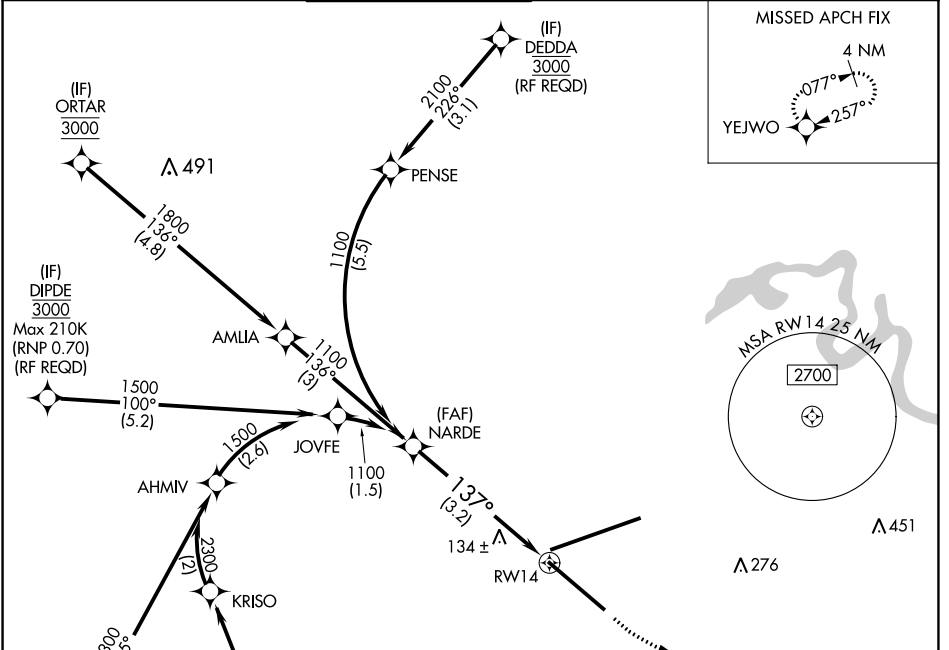



ELEV	29	TDZE	27
------	----	------	----

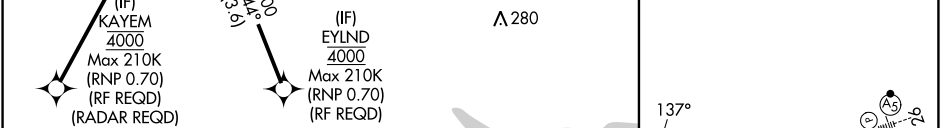

VGSI and RNAV glidepath not coincident (VGSI Angle 3.00/TCH 70).

NARDE 1100

500 2000 YEJWO

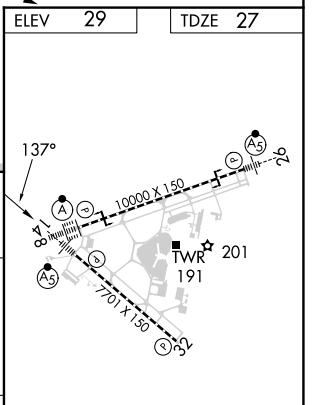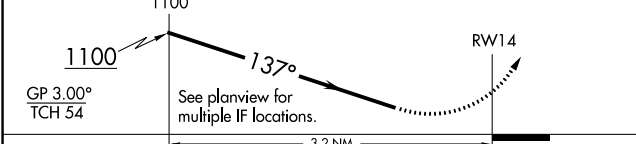

CATEGORY	A	B	C	D
RNP 0.30 DA		389-1	362 (400-1)	
AUTHORIZATION REQUIRED				

REIL Rwy 32
TDZ/CL Rwys 8, 14, and 26
HIRL Rwys 8-26 and 14-32

SE-3, 26 DEC 2024 to 23 JAN 2025

SE-3, 26 DEC 2024 to 23 JAN 2025