

LOC I-MQJ 108.7	APP CRS 252°	Rwy Idg TDZE Apt Elev	6005 860 862
---------------------------	------------------------	-----------------------------	---


ILS or LOC RWY 25

INDIANAPOLIS RGNL (MQJ)

NA When local altimeter setting not received, use Indianapolis Intl altimeter setting and increase all DA 55 feet and all MDA 60 feet, increase S-LOC 25 Cats C/D visibility 1/2 mile and Circling Cat D visibility 1/4 mile.

MALSRS
MISSED APPROACH: Climb to 1400 then climbing left turn to 2400 on SHB VOR/DME R-334 to SHB VOR/DME and hold.

AWOS-3PT 124.175	INDIANAPOLIS APP CON 127.15 317.8	CLNC DEL 119.25	UNICOM 122.975 (CTAF)
----------------------------	---	---------------------------	---------------------------------


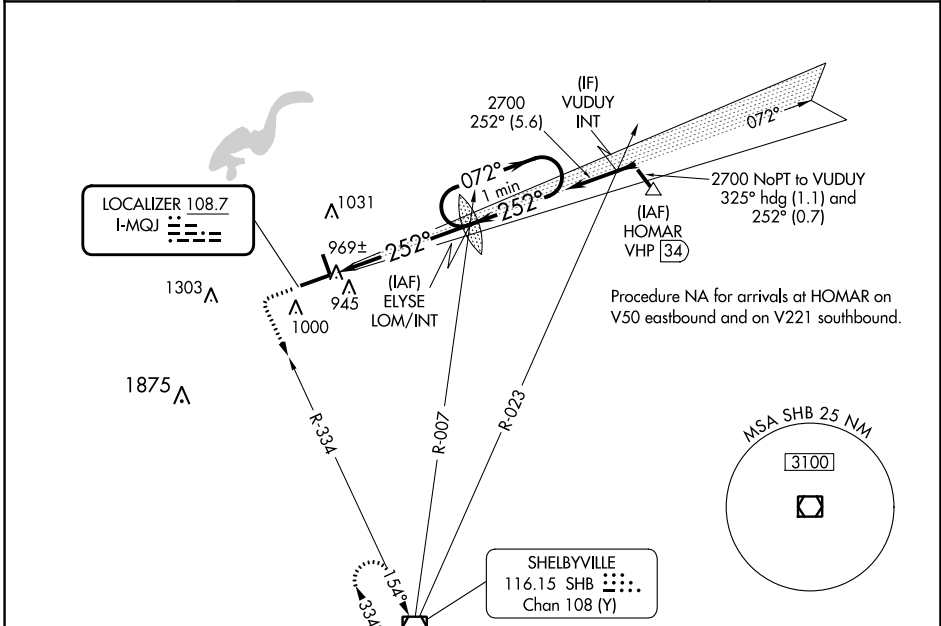


EC-2, 26 DEC 2024 to 23 JAN 2025

EC-2, 26 DEC 2024 to 23 JAN 2025



ELEV 862	TDZE 860
----------	----------

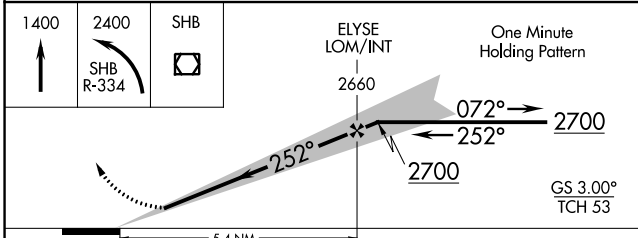

CATEGORY	A	B	C	D	FAF to MAP 5.4 NM						
S-ILS 25	1060-1/2 200 (200-1/2)				1220-5/8	360 (400-5/8)	60	90	120	150	180
S-LOC 25	1220-1/2	360 (400-1/2)			1360-1/2	1660-2/2	5:24	3:36	2:42	2:10	1:48
CIRCLING	1340-1	478 (500-1)			498 (500-1/2)	798 (800-2/2)					

REIL Rwy 7 and 34	HIRL Rwy 7-25	MIRL Rwy 16-34			
FAF to MAP 5.4 NM					
Knots	60	90	120	150	180
Min:Sec	5:24	3:36	2:42	2:10	1:48