


APP CRS	Rwy Idg	10000
036°	TDZE	645
	Apt Elev	645

RNAV (RNP) X RWY 4L

DETROIT METRO WAYNE COUNTY (DTW)

RNP AR APCH.			ALS-F2 		MISSED APPROACH: Climb to 1100 then climbing left turn to 4000 direct DOHNT and hold.	
 Simultaneous approach authorized. For uncompensated Baro-VNAV systems, procedure NA below -19°C or above 54°C. For inop ALS, increase RNP 0.30 DA all Cnts visibility to RVR 6000.						
D-ATIS 133.675	DETROIT APP CON 124.05 284.0	METRO TOWER 135.0 317.725	GND CON 121.8 (NW) 119.45 (NE) 132.725 (SW) 119.25 (SE)		CLNC DEL 120.65	CPDLC

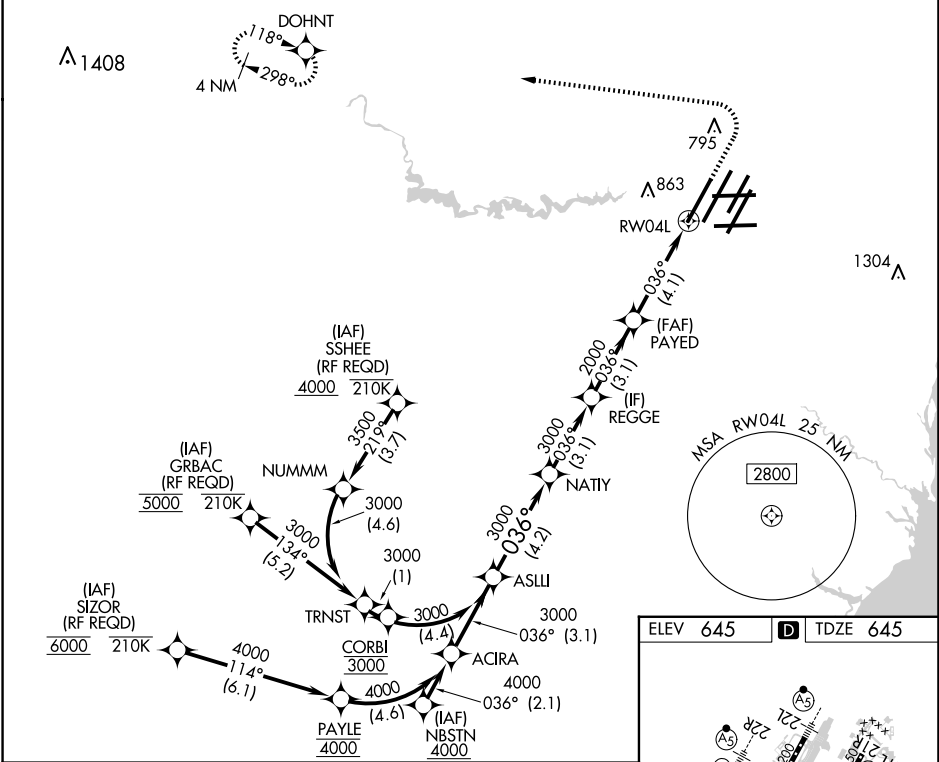

VGSi and RNAV glidepath not coincident (VGSi Angle 3.00/TCH 71).		1100	4000	DOHNT
ASLI		NATY	REGGE	PAYED
3000		3000	3000	2000
GP 3.00° TCH 55				RW04L
4.2 NM		3.1 NM	3.1 NM	4.1 NM
CATEGORY	A	B	C	D
RNP 0.15 DA		970/26	325 (400-½)	
RNP 0.30 DA		1058/40	413 (500-¾)	
AUTHORIZATION REQUIRED				
TDZ/CL Rwy 3R, 4L, 4R and 22R REL Rwy 3L, 9L, 9R and 21R HIRL all runways				