

24249

WAAS CH 99601 W22A	APP CRS 216°	Rwy Idg 12003 TDZE 637 Apt Elev 645
--	------------------------	--

RNAV (GPS) Z RWY 22L
DETROIT METRO WAYNE COUNTY (DTW)


RNP APCH.

▼ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -10°C (14°F) or above 54°C (130°F). Simultaneous approach authorized. LNAV procedure NA during simultaneous operations. Use of FD or AP required during simultaneous operations. For inop ALS, increase LNAV/VNAV all Cats visibility to RVR 4500 and LNAV Cat C/D visibility to 1 1/2 SM. #RVR 1800 authorized with use of FD or AP or HUD to DA.




MISSED APPROACH:
Climb to 4000 direct
HWLER and hold.

D-ATIS 133.675	DETROIT APP CON 124.05 284.0	METRO TOWER 128.125 317.725	GND CON 121.8 (NW) 119.45 (NE) 132.725 (SW) 119.25 (SE)	CLNC DEL 120.65	CPDLC
--------------------------	--	---------------------------------------	---	---------------------------	-------

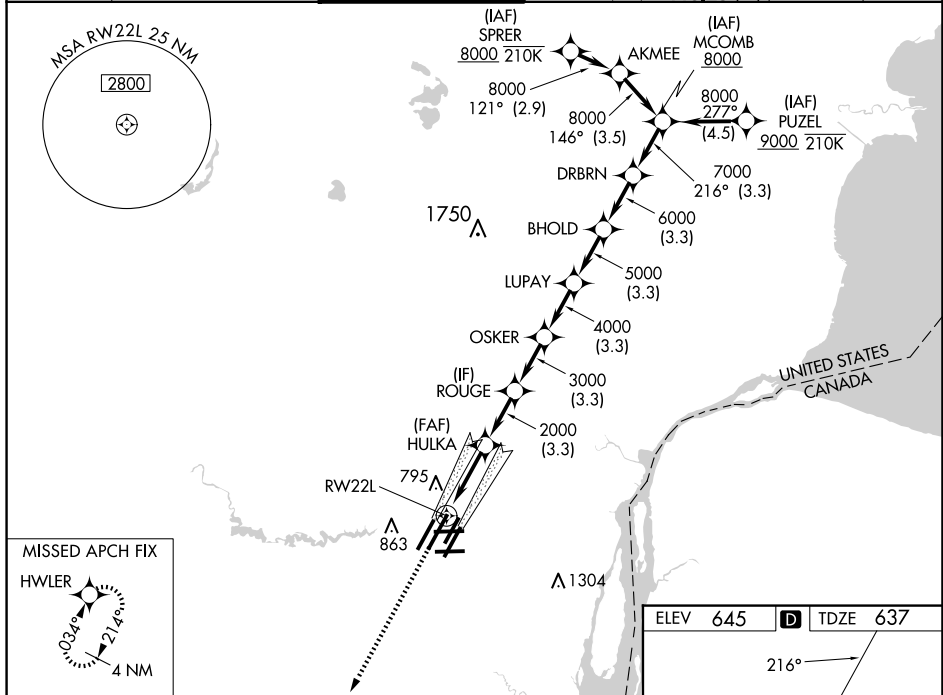

4000 ↑	HWLER 								
* LNAV only.		HULKA 2000	ROUGE 3000	OSKER 4000	LUPAY 5000	BHOLD 6000	DRBRN	MCOMB 8000	
		1.3 NM	3 NM	3.3 NM	3.3 NM	3.3 NM	3.3 NM	3.3 NM	
		RW22L							GP 2.85° TCH 60
CATEGORY	A	B			C		D		
LPV DA#	837/24				200 (200-½)				
LNAV/VNAV DA	938/24				301 (300-½)				
LNAV MDA	1100/24 463 (500-½)		1100/50 463 (500-¾)						
CIRCLING	1180-1 535 (600-1)		1180-1½ 535 (600-1½)			1240-2 595 (600-2)			

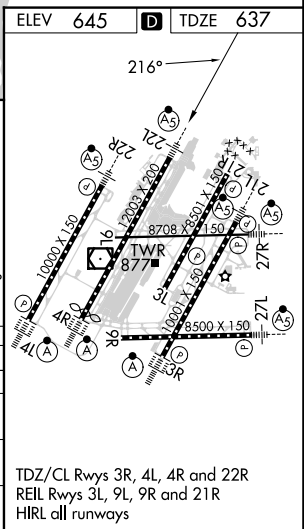

DETROIT, MICHIGAN
Amdt 3 24MAY18

42°13'N-83°21'W

DETROIT METRO WAYNE COUNTY (DTW)
RNAV (GPS) Z RWY 22L

EC-1, 23 JAN 2025 to 20 FEB 2025