



| | | |
|--|------------------------|--|
| LOC/DME I-SLC 109.5 Chan 32 | APP CRS 344° | Rwy Idg 12002 TDZE 4225 Apt Elev 4231 |
|--|------------------------|--|

ILS or LOC RWY 34R

SALT LAKE CITY INTL (SLC)


| | | | | | |
|-----------------------------------|--|---------|--|--|--|
| DME required for LOC only. | | ALSIF-2 | MISSED APPROACH: Climb to 9000 direct TCH VORTAC and on TCH VORTAC R-331 to OGD VORTAC and hold. | | |
| Simultaneous approach authorized. | | | | | |

| | | | | | |
|---------------------------------|--|---|---------------------------------|----------------------------------|-------|
| D-ATIS 124.75 125.625 | SALT LAKE CITY APP CON 125.7 284.6 | SALT LAKE CITY TOWER 119.05 257.8 | GND CON 123.775 348.6 | CLNC DEL 127.3 379.975 | CPDLC |
|---------------------------------|--|---|---------------------------------|----------------------------------|-------|

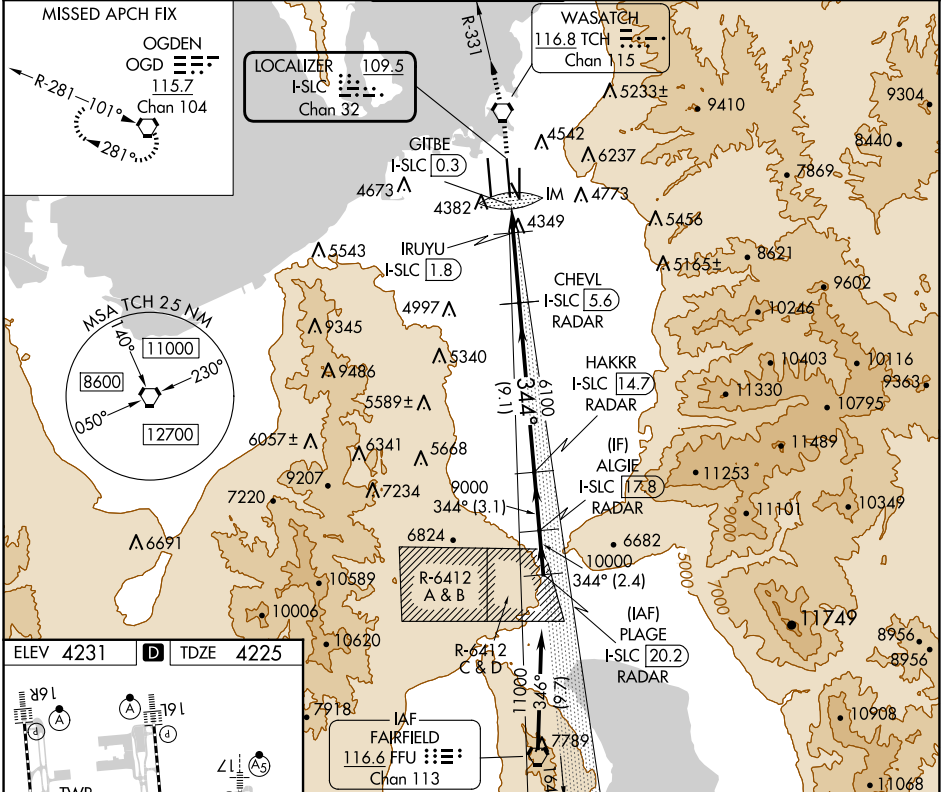

HIRL all Rwys
TDZ/CL Rwys 16L, 16R, 17, 35, 34L, and 34R

| | | | | | |
|-------------------|------|------|------|------|------|
| FAF to MAP 5.3 NM | | | | | |
| Knots | 60 | 90 | 120 | 150 | 180 |
| Min:Sec | 5:18 | 3:32 | 2:39 | 2:07 | 1:46 |

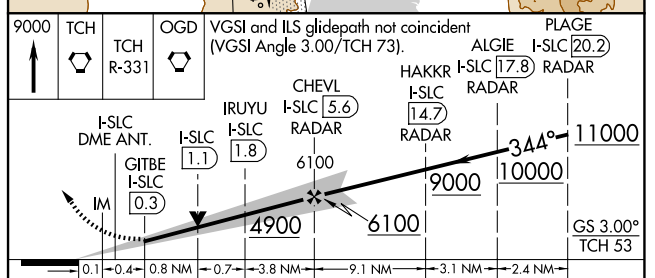

| | | | | |
|-----------|---------------------|-------------|---------|-------------|
| CATEGORY | A | B | C | D |
| S-ILS 34R | 4425/18 200 (200-½) | | | |
| S-LOC 34R | 4700/24 | 475 (500-½) | 4700/50 | 475 (500-1) |

SW-4, 23 JAN 2025 to 20 FEB 2025

SW-4, 23 JAN 2025 to 20 FEB 2025