

LOC/DME I-MVY	APP CRS	Rwy Idg	5504
108.7	236°	TDZE	63
Chan 24		Apt Elev	67

ILS or LOC RWY 24


MARTHA'S VINEYARD (MVY)

▼ VDP NA with Hyannis altimeter setting. When local altimeter setting not received, use Hyannis altimeter setting and increase all DA to 317 feet and all MDA 60 feet; increase S-LOC Cats C and D visibility to RVR 5000, Circling Cat C and D visibility ¼ SM. For inoperative MALS R when using Hyannis altimeter setting, increase S-LOC Cats C and D visibility to 1¾ mile. Circling Rwy 15 NA at night. ** RVR 1800 authorized with use of FD or AP or HUD to DA (NA when using Hyannis altimeter setting).

MALS R

CLIMB TO 800 THEN
CLIMBING LEFT TURN TO 2500
ON MVY VOR/DME R-180
TO CLAMY INT/ACK 23.9
DME and hold.

ATIS	BOSTON APP CON	VINEYARD TOWER *	GND CON	CLNC DEL	CLNC DEL	UNICOM
126.25	133.75	121.4 (CTAF) 0	124.35	124.35	119.7 (When twr closed)	122.95

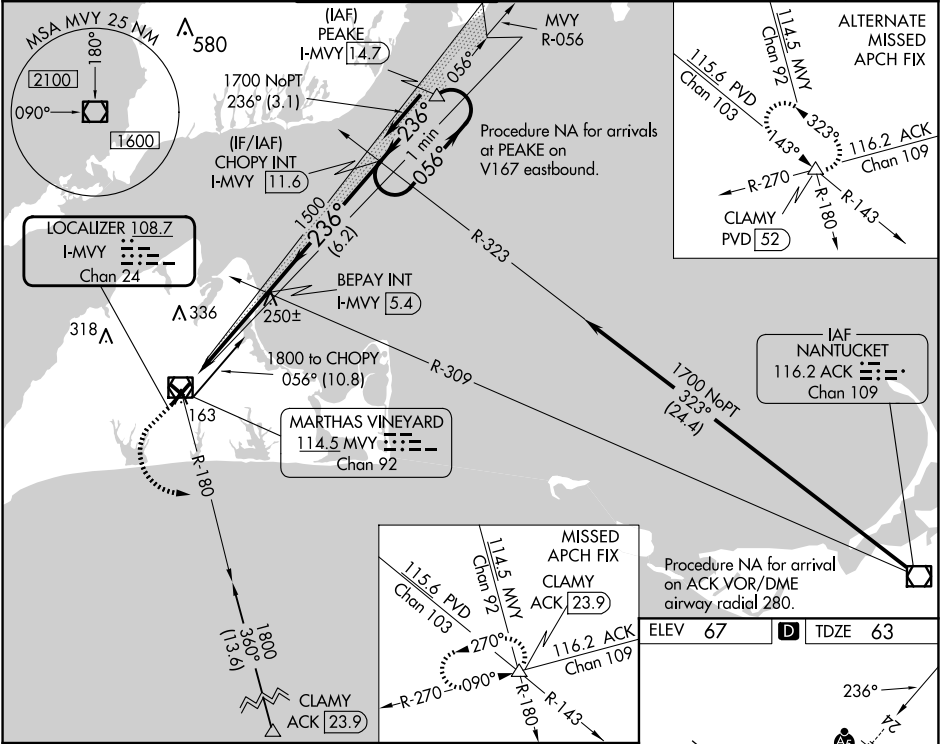

800	2500	CLAMY	Use I-MVY DME when on the localizer course.	CHOPY INT I-MVY 11.6	One Minute Holding Pattern
*LOC only	I-MVY 1	*I-MVY 2.3	1500	1500	1700
	1.2 NM	3.2 NM	6.2 NM		
CATEGORY	A	B	C	D	
S-ILS 24 **	263/24	200 (200-½)			
S-LOC 24	500/24	437 (500-½)	500/40	437 (500-¾)	
CIRCLING	500-1 433 (500-1)	540-1 473 (500-1)	700-1¾ 633 (700-1¾)	780-2¼ 713 (800-2¼)	
FAF to MAP 4.4 NM					
Knots	60	90	120	150	180
Min:Sec	4:24	2:56	2:12	1:46	1:28