


ILS Z or LOC Z RWY 7L


LOC/DME I-NPA 109.3 Chan 30	APCH CRS 069°	Rwy Idg TDZE 23 Arpt Elev 28
---	-------------------------	--

[USN] PENSACOLA NAS (FORREST SHERMAN FLD) (KNPA)


RADAR, TACAN, and DME required * When ALS inop, increase vis to ¾ mile. ** When ALS inop, increase vis to 1 mile			ALS-F-1 	MISSED APPROACH: Climb to 600. Then climbing right turn to 1500 via NPA R-145 to CUPER and hold.		
ATIS 124.35 266.8	APP CON 120.65 270.8	SHERMAN TOWER 120.7 340.2	GND CON 121.7 336.4	CLNC DEL 134.1 268.7	ASR/ PAR	

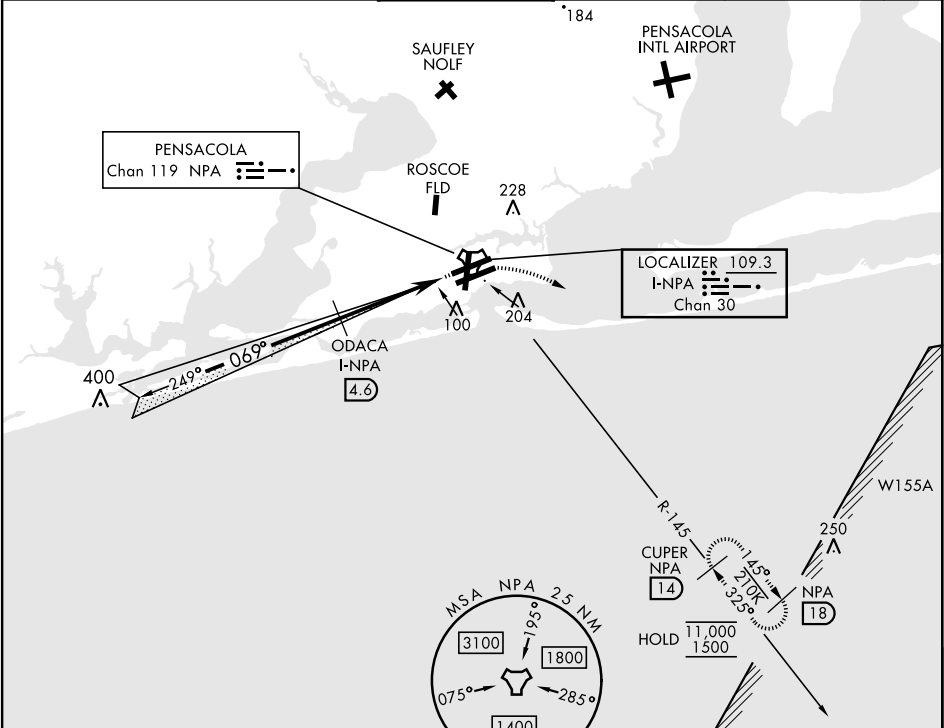

EMERG SAFE ALT 100 NM 3100

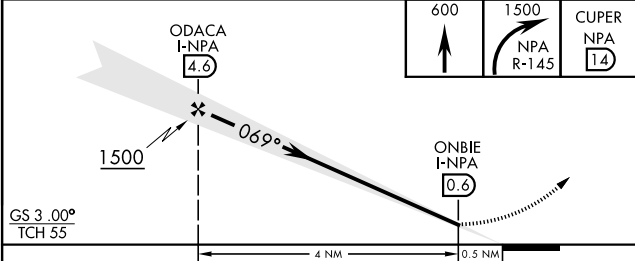

CATEGORY	A	B	C	D	E
S-ILS 7L *	223-½		200	(200-½)	
S-LOC 7L **	360-½		337	(400-½)	
CIRCLING	520-1	492	(500-1)	540-1½	600-2
			512 (600-1½)	572 (600-2)	612 (700-2¼)

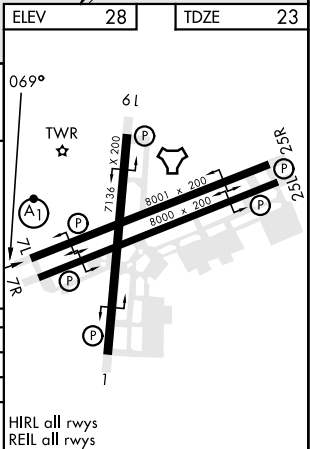

ILS Z or LOC Z RWY 7L

SE-3, 23 JAN 2025 to 20 FEB 2025

SE-3, 23 JAN 2025 to 20 FEB 2025