

WAAS
CH **70719**
W32A

APP CRS
323°

Rwy Idg **4101**
TDZE **1766**
Apt Elev **1766**

RNAV (GPS) RWY 32
CORRY-LAWRENCE (8G2)

RNP APCH.

▼

NA


Baro-VNAV NA. Rwy 32 helicopter visibility reduction below ¾ SM NA.
Use Jamestown NY altimeter setting; when not received, use Meadville altimeter setting and increase all DA 65 feet and all MDA 80 feet; increase LPV all Cats, LNAV/VNAV all Cats and LNAV Cat C visibility ¼ SM.

MISSED APPROACH: Climb to 3600 direct EKOYE and hold.

JHW AWOS-3PT
118.425

BUFFALO APP CON ★
121.0 257.8

UNICOM
122.8 (CTAF) 0

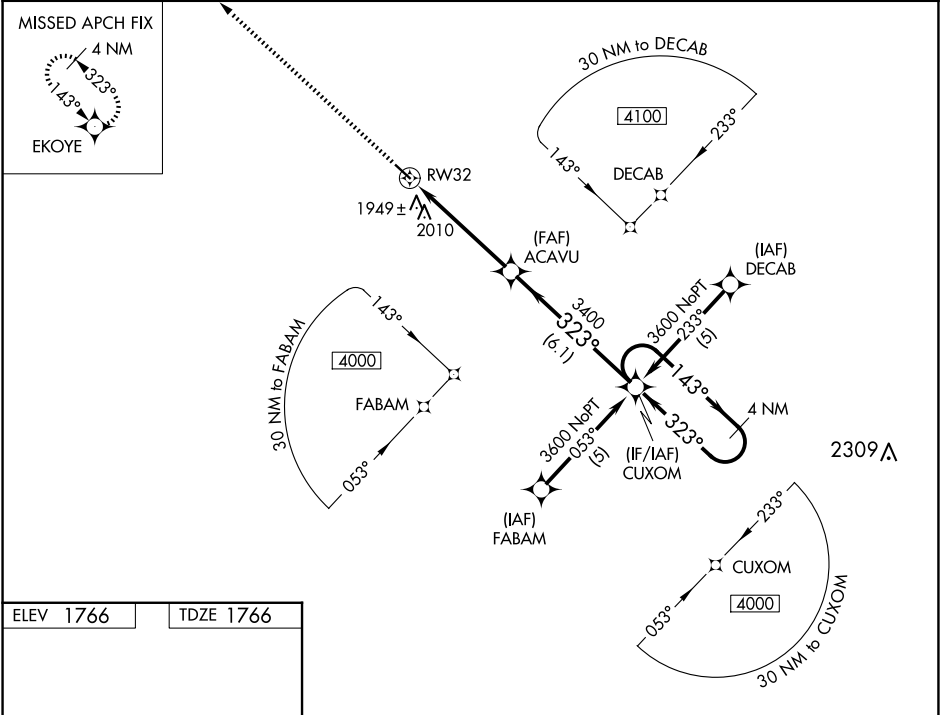

ELEV 1766

TDZE 1766

3600

EKOYE

ACAVU

3400

323°

4.9 NM

6.1 NM

CUXOM

4 NM Holding Pattern

143°

3600

323°

GP 3.00°

TCH 40

REIL Rws 14 and 32 0

MIRL Rwy 14-32 0

CATEGORY	A	B	C	D
LPV DA	2074-1 308 (400-1)			NA
LNAV/VNAV DA	2324-2 558 (600-2)			NA
LNAV MDA	2340-1 574 (600-1)		2340-1½ 574 (600-1½)	NA