

WAAS CH 82308 W21A	APP CRS 207°	Rwy Idg 5500 TDZE 1276 Apt Elev 1276
--	------------------------	---


RNAV (GPS) RWY 21
EPHRATA MUNI (EPH)

RNP APCH.

⚠ For uncompensated Baro-VNAV systems, LNAV/VNAV NA below -17°C or above 46°C. VDP and Baro-VNAV NA when using Moses Lake/Grant County Intl altimeter setting. When local altimeter setting not received, use Moses Lake/Grant County Intl altimeter setting and increase all DA/MDA 40 feet; increase visibility LPV all Cats, and LNAV Cats C and D ¼ SM.

MISSED APPROACH: Climb to 4500 direct UDECU and hold.

ASOS 135.775	GRANT COUNTY APP CON ★ 126.4 379.95	UNICOM 122.8 (CTAF) 0
------------------------	---	---------------------------------

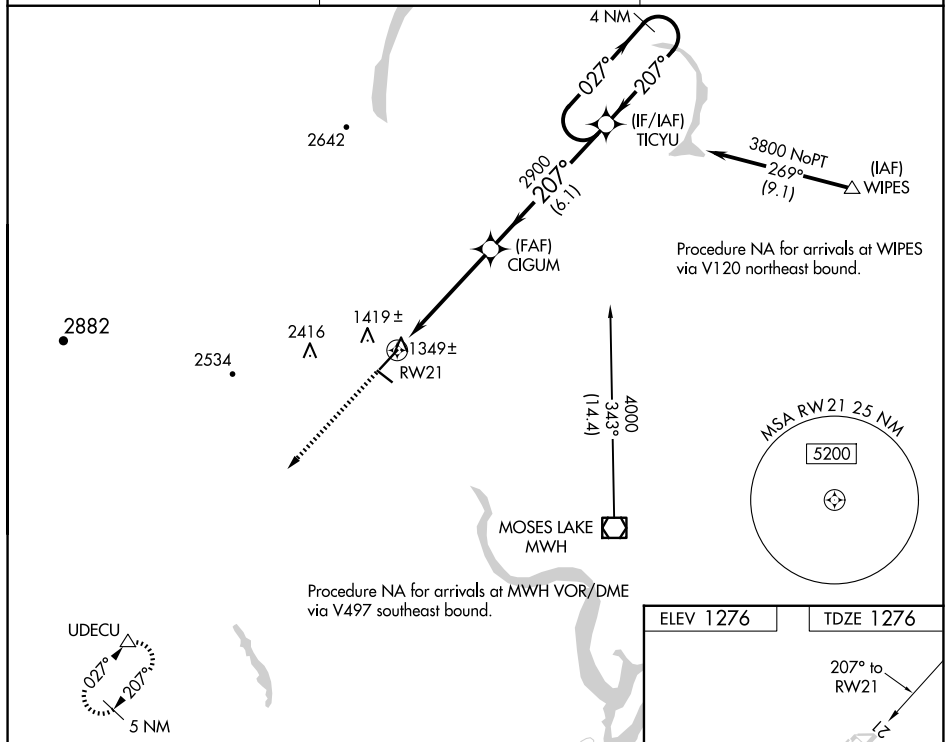

4500 UDECU VGS1 and RNAV glidepath not coincident (VGS1 Angle 3.00/TCH 40). 4 NM Holding Pattern

*LNAV only *2.2 NM to RW21 CIGUM TICUY 027° 207° 3800 2900 GP 3.00° TCH 51

2.2 NM 2.7 NM 6.1 NM

CATEGORY	A	B	C	D
LPV DA	1526- $\frac{3}{4}$	250 (300- $\frac{3}{4}$)		
LNAV/VNAV DA	2171-4	895 (900-4)		
LNAV MDA	2020-1 744 (800-1)	2020-1 $\frac{1}{4}$ 744 (800-1 $\frac{1}{4}$)	2020-2 $\frac{1}{4}$ 744 (800-2 $\frac{1}{4}$)	2020-2 $\frac{1}{2}$ 744 (800-2 $\frac{1}{2}$)

