

RNAV (RNP) Z RWY 35R

RENO/TAHOE INTL (RNO)

| | |
|------------------------|-------------------------|
| APP CRS 347° | Rwy Idg 9000 |
| | TDZE 4408 |
| | Apt Elev 4415 |

RNP AR APCH - GPS.


For uncompensated Baro-VNAV systems, procedure NA below -9°C or above 34°C.

-13°C

MISSED APPROACH: Climb to 11000 on track 347° to HOGBO and on track 345° to TAKLE and hold, continue climb-in-hold to 11000.

*Missed approach requires minimum climb of 301 feet per NM to 7150.

| | | | | | |
|------------------------------|---|----------------------------------|-------------------------------|---------------------------------|-------|
| D-ATIS 135.8 363.0 | NORCAL APP CON 119.2 279.55 126.3 353.9 | RENO TOWER 118.7 257.8 | GND CON 121.9 348.6 | CLNC DEL 124.9 370.85 | CPDLC |
|------------------------------|---|----------------------------------|-------------------------------|---------------------------------|-------|


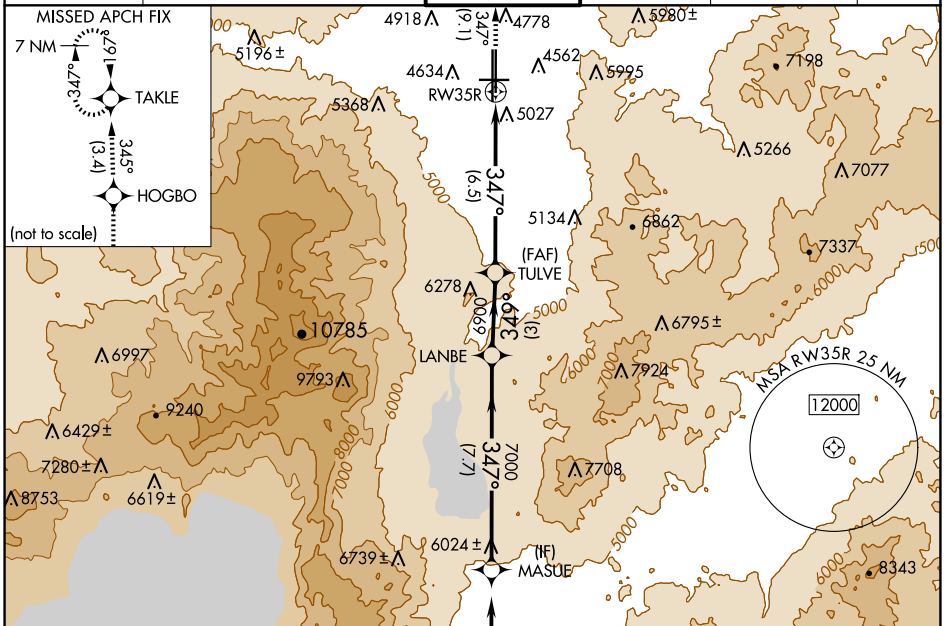


SW-4, 20 MAR 2025 to 17 APR 2025

SW-4, 20 MAR 2025 to 17 APR 2025

ELEV 4415 **D** TDZE 4408

REIL Rwy 8, 17L, 26, and 35R
HIRL Rwy 17R-35L and 17L-35R
MIRL Rwy 8-26

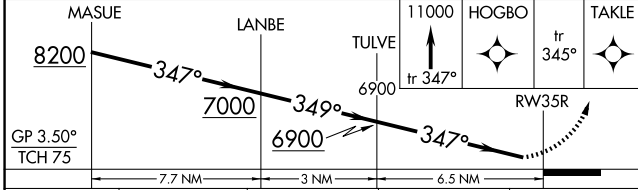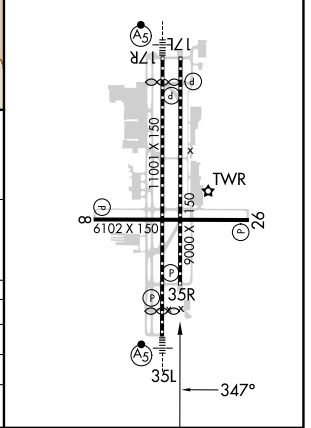

| | | | | |
|--------------|---------|---|---------------|---|
| CATEGORY | A | B | C | D |
| RNP 0.11 DA* | 4762-1 | | 354 (400-1) | |
| RNP 0.30 DA | 5349-2½ | | 941 (1000-2½) | |

AUTHORIZATION REQUIRED