


WAAS CH 93536 W09A	APP CRS 094°	Rwy Idg TDZE Apt Elev	4004 38 38
--	------------------------	-----------------------------	---------------------------------------

RNAV (GPS) RWY 9

WALLACE-PENDER (ACZ)

RNP APCH - GPS.	▼ NA Rwy 9 helicopter visibility reduction below 1 SM NA. Baro-VNAV NA. When local altimeter not received, use Kenansville altimeter setting. Straight-in and Circling Rwy 9 NA at night.	MISSED APPROACH: Climb to 2000 direct EJABI and hold.

AWOS-3P 121.07	WILMINGTON APP CON ★ 135.75 317.425	UNICOM 122.8 (CTAF) 0
--------------------------	---	---------------------------------

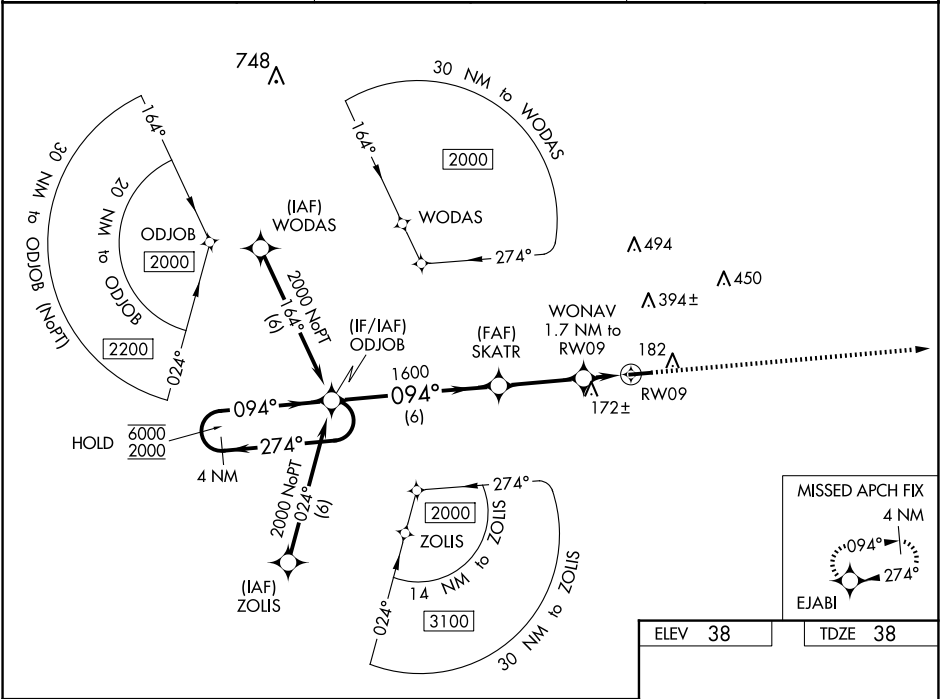

VGSI and RNAV glidepath not coincident (VGSI Angle 3.10/TCH 40).			
4 NM Holding Pattern			
GP 3.00° TCH 51			
6000 ← 274° 094° → 1600 620 1600 620 1600 620 1600 620			
6 NM 3.1 NM 1.7 NM			
CATEGORY	A	B	C
LPV DA	401-1	363 (400-1)	
LNAV/VNAV DA	538-1½	500 (500-1½)	
LNAV MDA	500-1 462 (500-1)	500-1¾ 462 (500-1¾)	
CIRCLING	620-1 582 (600-1)	820-2¼ 782 (800-2¼)	820-2½ 782 (800-2½)

