

| | | | |
|----------------------------|------------------------|-----------------|-------------|
| LOC I-JZW 110.95 | APP CRS 357° | Rwy Idg 6002 | TDZE 697 |
| | | Apt Elev 700 | |

ILS or LOC RWY 36L

FORT WORTH SPINKS (FWS)


RADAR required for procedure entry.

⚠ NA Circling NA west of Rwy 18R-36L. For inop ALS increase S-LOC 36L Cat C/D visibility to 1 1/4 SM.



MALS
AS

MISSED APPROACH: Climb to 1800 then climbing left turn to 3100 on heading 269° and FUZ VORTAC R-222 to SLUGG INT/ FUZ 37.5 DME and hold.

| | | | | |
|------------------------|-------------------------------------------|-----------------------------------------|---------------------------|------------------------|
| ATIS 120.025 | LONE STAR APP CON 135.975 379.9 | SPINKS TOWER ★ 124.625 (CTAF) | GND CON 119.475 | UNICOM 122.7 |
|------------------------|-------------------------------------------|-----------------------------------------|---------------------------|------------------------|

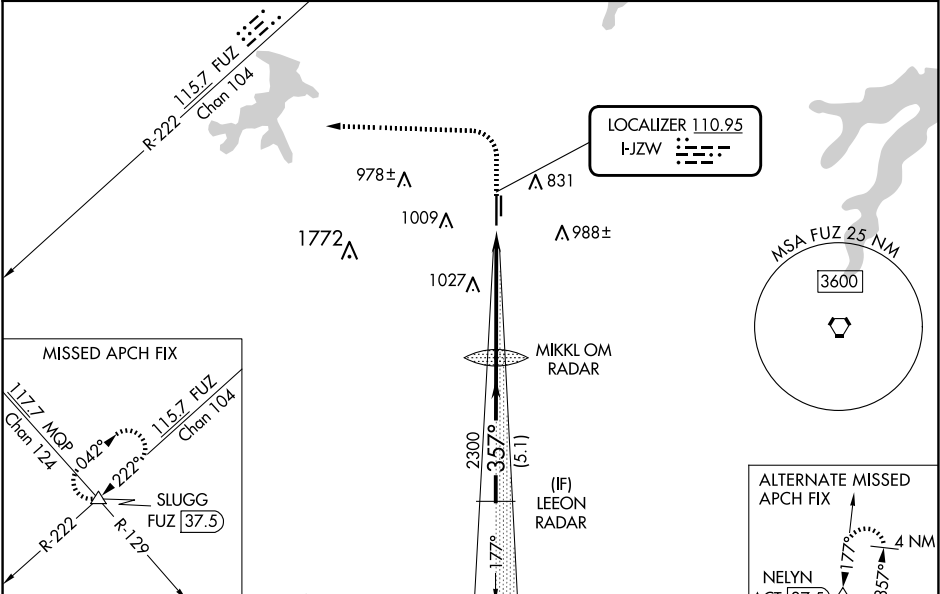

| | |
|----------|----------|
| ELEV 700 | TDZE 697 |
|----------|----------|

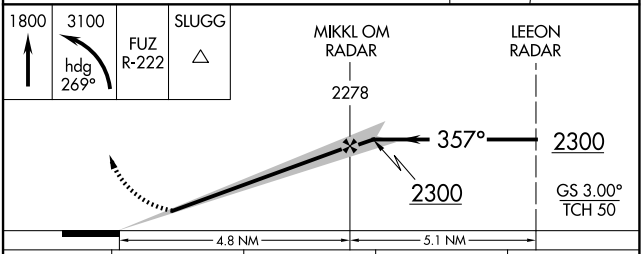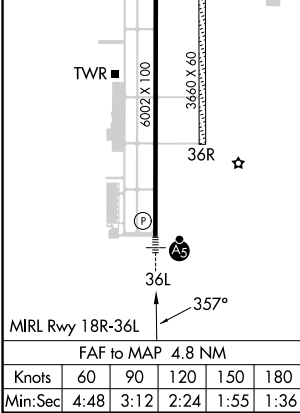

| | | | | |
|-----------|------------------------|----------------------------|--------------------|---|
| CATEGORY | A | B | C | D |
| S-ILS 36L | 897-1/2 200 (200-1/2) | | | |
| S-LOC 36L | 1320-1/2 623 (700-1/2) | 1320-1 3/8 623 (700-1 3/8) | | |
| CIRCLING | 1320-1 620 (700-1) | 1340-1 3/4 640 (700-1 3/4) | 1340-2 640 (700-2) | |

SC-2, 20 MAR 2025 to 17 APR 2025

SC-2, 20 MAR 2025 to 17 APR 2025